




**TOOL &
SAFETY
DIVISION**

HARRISONBURG, VIRGINIA
(540) 433-7727 • 1-800-796-9027 • www.specialfleet.com

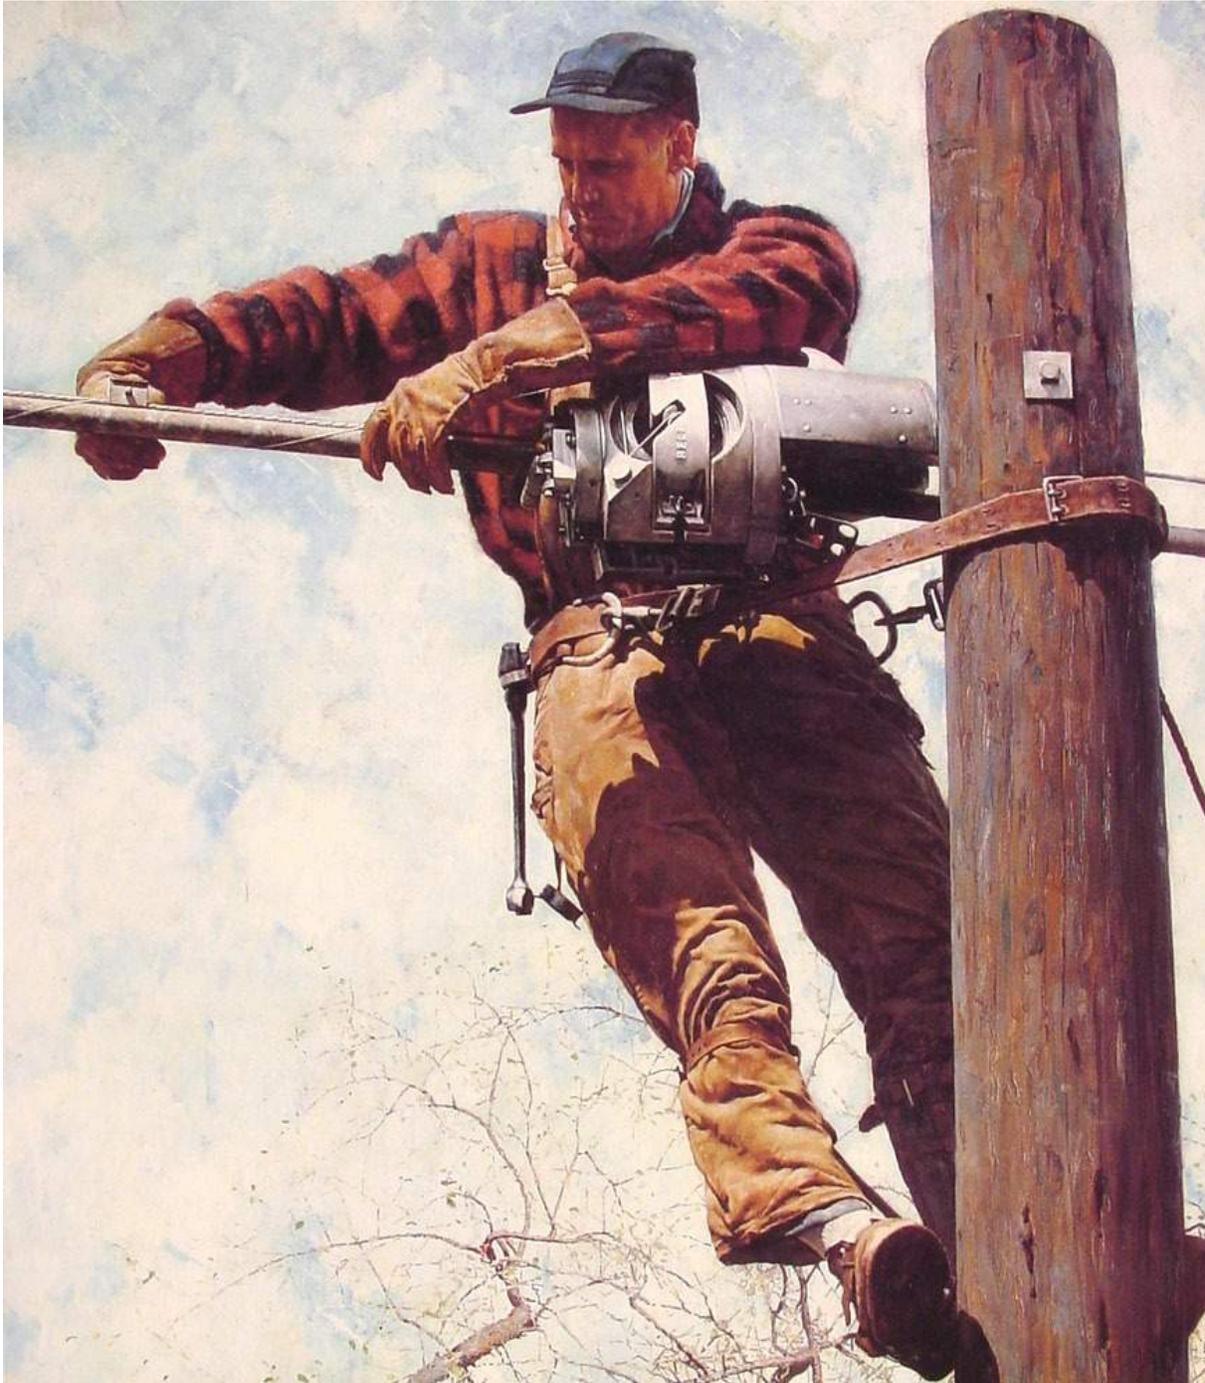

Utility, Safety & Construction
Supply Catalog

Quality Work & Service: It's Who We Are.



Special Fleet Service began in 1983 as an equipment upfitter but with roots in the utility industry since 1937, we quickly realized the need for supplier and service in the tool and safety industry.

We are the only commercial lineman's protective rubber testing facility in Virginia. Our on-site facility is located in the beautiful Shenandoah Valley, centrally located in the middle of the east coast.

We pride ourselves in high standards of quality control and customer service. While we aim to make information accessible quickly and easily, we excel in personal contact and are available by phone, email or in person meetings-at our office, or yours.

Storm Service-No matter what the weather, you never stop working-we don't either. We know our customers are on the frontline's during snow, storms and anything else Mother Nature throws at them. When you're fighting the weather, you need the tools in-hand to complete your mission, Special Fleet takes our responsibility during storm duty very seriously. From tool orders, rubber goods, grounds and jumpers, we prioritize storm orders to get them out the door and into the hard working hands that need them. Available 24/7/365, never hesitate to call SFS at our main office or your trusted sales representative.

Let us show you what special service from Special Fleet is all about.



SPECIAL FLEET SERVICE

In addition to our complete line of tools and safety products, we also offer:

- Dielectric testing of all lineman's protective rubber products to meet or exceed ANSI/ASTM standards
- Large inventory of rubber goods, quick turn-around to help keep your inventory requirements to a minimum
- Mobile dielectric testing and annual inspection of bucket trucks and Digger Derricks
- Complete tool repair and rebuild capabilities of all hydraulic, pneumatic, electric, manual hand tools, hoist and gas drills
- Fiberglass restoration of hot stick and arms
- Customized repair and testing programs available to meet your price and logistic requirements

Questions, Comments, Orders & Quotes:

Contact us today!

Phone: 540-433-7727 or 800-796-9027

Fax: 540-438-9502

Email: store@specialfleet.com



Special Fleet Service proudly offers tools and equipment from these quality manufacturers:

- 3M**-Cable Locators
- A.B. Chance**-Utility Construction Tools
- AW Sperry**-Test Meters
- AEMC**-Test Meters
- Aircraft Dynamics**-Robo Tools
- Bashlin**-Lineman & Arborist Tools
- Bethea**-Stringing Blocks
- Bierer and Associates**-Test Meters
- Bone**-Traffic Signals
- Brunner & Lay**-Demolition Tools
- Buckingham Mfg.**-Lineman & Arborist Tools
- Burndy**-Hydraulic Tools, Dies & Accessories
- Capital Safety**-Fall Protection
- Carolina**-Work Gloves
- Cembre**-Crimping & Cutting Tools
- Cementex**-Insulated Hand Tools
- Condux**-Underground/Overhead Utility Tools
- Cooper**-Utility Construction Tools
- Council Tool**-Digging & Brush Tools
- Current Tools**-Electrician Tools
- DCD**-Cable Installation Products
- Dillon**-Dynamometers
- Dixie Tool**-Cant Hooks, Load Binders, Pole Tongs
- Eagle Line Tools**-Utility Tools
- Erin**-Rope
- Estex**-Canvas Products
- GMP**-Utility Tools
- Golight**-Remote Control Spotlights
- Greenlee**-Battery & Hydraulic Tools
- H.K. Porter**-Bolt & Cable Cutters
- Hastings**-Fiberglass Products
- HD Electric**-Electric Test & Measurement
- Huskie**-Battery/Hydraulic Crimping & Cutting Tools
- Irwin**-Drill Bits
- Jameson**-Construction & Maintenance Tools
- JBC Safety Plastics**-Traffic Cones
- Jenny Tools**-Utility Tools
- Kinco**-Winter Gloves
- Klein**-Hand Tools
- Knopp**-Test Meters
- Leidy Tool Company**-Fiberglass Digging Bars
- Lewis Mfg.**-Cable Grips, Dirt Tarps
- Lincoln Hoist**-Strap Hoists
- Little Mule**-Grips & Hoists
- Lugall**-Strap & Cable Hoists
- Madi**-Lineman Tools
- MYTE**-Winches
- OshKosh**-Pole Line Construction Tools
- Parker**-Hydraulic Fittings
- Peavey Mfg.**-Pole Line Construction Tools
- Pengo**-Auger & Backhoe Teeth
- Pelsue**-Manhole Ventilation/Gas Monitors
- Plastic Techniques**-Bucket/Boom Components
- Princeton Tec.**-Flashlights/Headlamps
- Radians**-Safety Vests
- Rauckman Utility Products**-Insulated Wrenches
- Ripley**-Cable Prep Tools
- Rubbermaid**-Water Coolers
- Salisbury**-Lineman's Rubber & Equipment
- Safeway Sling**-Nylon Slings & Straps
- S&C**-Load Busters
- Sensor Link**-Ampstik, Test Meters
- Servus Rubber**-Protective Footwear
- Seymour Mfg.**-Fiberglass Hand Tools
- Sherman & Reilly**-Utility Tools
- Slingco**-Swivels, Cable Grips
- Speed Systems**-Cable Prep Tools
- Stanley**-Hydraulic Tools
- Streamlight**-Flashlights, LiteBox
- Stucchi**-Hydraulic Fittings
- Tanaka**-Gas Drills
- Tegam**-Electronic Test Equipment
- Terex Reedrill**-Augers & Components
- Timco Instruments**-Electronic Test Equipment
- Tulsa Power Products**-Reel Handlers
- Utility Solutions**-Hot Line Tools
- Utility Tool & Body**-Pole Trailer Accessories
- Wanco**-Traffic Control Devices
- Warren Heim**-Canvas Products
- Werner**-Ladders
- Work Area Protection**-Traffic Safety
- Youngstown Gloves**-Work Gloves

Grounds and jumpers protect your employees, keeping them safe from hazardous, potentially fatal occurrences. That's why choosing the best, is a good choice.



Special Fleet Service will custom build grounds and jumpers to your exact specifications. With a large quantity of parts in stock, we waste no time getting your equipment made and shipped to the field.

Quotes available: store@specialfleettools.com

Custom Choices:

- Clamp
- Size & Length
- KV Ratings of Cable (for Jumpers)
- Ferrules Determined through Cable & Clamp Selection
- All Ground Sets will have Heat Shrink Applied



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

You have a job to get done. When you don't have time to ship your grounds and jumper to us, let us come to you. Special Fleet will work with your company to set up on-site testing by a trained technician on your home turf. Call us today to set up the most convenient way to get your equipment checked out and back to work.



Visual Inspection- Standards set by ASTM and IEEE recommends looking for these signs you're dealing with a potential hazard:

- Damaged, split or cracked clamps
- Cable damage, especially where the cables flexes next to the ferrules
- Wear on clamp tightening bolt threads
- Flattened/smashed section of the cable
- Wear on the clamp jaws
- Corrosion, typically indicated by swollen cable jackets or soft spots
- Difficult to operate threaded clamping mechanism
- Loose connections between the cable and clamps or the ferrules and clamps
- Broken cable strands near connection points



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Our testing facility is over 18,000 square feet, fully staffed and ready to serve all of your testing needs. We are proudly NAIL accredited and closely follow all ASTM standards, including their sequence recommendation.



With over 2 million dollars of rubber goods and tooling inventory in a climate controlled warehouse, SFS can help you avoid costly lead times.

All rubber goods testing includes the following steps:

- Check-In
- Washing of Materials
- Preliminary Inspection
- Electrical Testing
- Drying
- Final Inspection
- Record-Keeping and Marking
- Powdering
- Pairing
- Packing



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Hard work, is hard on equipment. Fiberglass tools get worn over time. Instead of throwing away these costly tools, or worse yet, using up valuable space storing them; let us repair those tools. Special Fleet will restore your tools to like-new conditions, test your hot sticks and arms and return them to you quickly and efficiently; getting you back to getting the job done, and saving you money while doing it.



Ruined?



Restored!

Our work adheres to all ASTM standards.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Our tool repair facility is fully equipped with a vast parts inventory to repair a variety of tools, quickly and efficiently. At Special Fleet, we know that down time is costly, our goal is to get the tools you already own back in prime operating condition and back to you. Our facility has over 25 years of tool repair experience so you can feel assured quality work is being done on your tools.

Types of Tools Serviced:

- Battery Powered Tools
- Hydraulic Tools
- Hot Sticks
- Air Tools
- Chain & Strap Hoists

Railroad Tools Serviced:

- Geismar
- Matweld
- Racine
- Simplex
- Stanley
- Many others!

Why SFS Tool Repair?

- Decades of Experience
- Huge Parts Inventory On-Site
- Quick Turn-Around
- Factory Trained
- Save Money



Factory Trained to Repair:

- Burndy
- Cembre
- Fairmont
- Greenlee
- Huskie
- Little Mule
- Stanley

These are just some of the factory trained courses our technicians have completed!

**Same Tools,
Better Condition**



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Standard ROBO Kits Include:

- Battery powered tool
- Carrying Case
- CH-94 Lithium ion charger
- BP-84 Lithium ion battery (2)
- Carrying strap

- 5-year warranty on tool, battery & charger

The Rec-6 Series Features:

- Quicker cutting and compression cycles, blue housing with rubber inlay and ergonomic, lighter weight design

6-Ton Robo-Crimp

- One handed operation
- Rotational head, rapid advance
- Audible bypass when predetermined pressure is achieved
- Brush protection
- Pull-pin design for quick jaw change
- Interchangeable cutter head optional (25CAT)
- Connector Range:
 - ❑ Lugs & splices-#8-500 MCM CU, #8-300 MCM Al
 - ❑ H-Taps-Up to 4/0-4/0

Huskie #	Description	Weight
REC-658UAT	w/AC Charger, 1.8" Jaw Opening	8 lbs.
REC-658UAT-DC	w/DC Charger, 1.8" Jaw Opening	8 lbs.
REC-CN658AT	Open Jaw, .95" Jaw Opening	10.7 lbs.



Burndy #	Description
PAT600-LI	18V, Li-Ion Battery with AC Charger
PAT600-LI-DC	18V, Li-Ion Battery with DC Charger

Patriot PAT600-LI Battery Powered Crimper

- 6 Ton output force
- Refined hydraulic system, field proven electronics
- Overmolded comfort-grip handle that allows for one-handed operation for advance, retract, and hold
- Advance design high speed pump completes crimp in 3 seconds
- Specialized latch head design
- Crimping capacity:
 - ❑ CU-#8 up to 600 kcmil
 - ❑ AL-#8 350 kcmil
- Weight: 10.9 lbs.

6-Ton Robo-Crimp Compression Tool with Changeable Head

- 1-3/8" Jaw opening
- One handed operation
- Rotational head, rapid advance
- Audible bypass when predetermined pressure is achieved
- Forged jaws for longer life
- 10 Jaw types to choose from, not all pictured
- Connector Range:
 - ❑ Lugs & Splices: #8-500 MCM Cu,
 - ❑ H-Taps: Up to 4/0-4/0

Huskie #	Weight
REC-6NDSL-AT	9.8 lbs.



SLBG-JAW



SLO-Jaw



SL-CHCUAL



SL-CHACSR



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



6750



Huskie #	Description
REC-6750AT	w/AC Charger
REC-6750AT-DC	w/DC Charger

6.2-Ton Streamline Robo-Crimp Dieless Crimping Tool

- 1.5” Jaw Opening
- Designed to crimp Anderson connectors & other brand connectors manufactured to ANSI C119.4
- Rotational, flip-top head
- Tested up to 75kV
- Bright white, LED lights for working in low lighting
- Audible bypass when predetermined pressure is achieved
- Connector Range:
 - ☐ #6 AWG-750 MCM

Huskie #	Weight
SL-750-A-T	10.35 lbs.

6.2-Ton Robo-Crimp Dieless Crimping Tool

- 1.5” Jaw opening
- Designed to crimp Anderson connectors & other brands manufactured to ANSI C119.4
- Rotational head, rapid advance
- Audible bypass, when predetermined pressure is achieved
- Ergonomically balanced for one handed operation
- Flip-top head design
- Connector Range:
 - ☐ Lugs and Splices-#6 AWG-750 MCM
- Weight: 12 lbs.



Greenlee #	Description
EK06ATL12	Crimping Tool, Open Head Dieless, 12V Charger
EK06ATL120	Crimping Tool w/120V AC Adapter
EK06ATCL11	Crimping Tool, Open Rubber Covered Head Dieless, 120V Charger
EK06FTL11	Crimping Tool, Flip-Top Head Dieless, 120V Charger
EK06FTL12	Crimping Tool, Flip-Top Head Dieless, 12V Charger

EK06 Gator Quad-Point Battery Powered Dieless Crimper

- Utilizes four indentors to make the crimp
- Flip-top style uses a pull pin to open head for easy removal from the connector
- Crimping force: 12,400 lbs.
- Crimping capacity (EK06ATL):
 - ☐ Copper lugs and copper splices: 6 AWG-500 kcmil
 - ☐ Aluminum lugs and aluminum splices: 6 AWG-400 kcmil
- Crimping capacity (EK06FTL):
 - ☐ Copper lugs and copper splices: 6 AWG-750 kcmil
 - ☐ Aluminum lugs and aluminum splices: 6 AWG-750 kcmil
- Weight: 12 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

6.2-Ton Robo-Crimp Dieless

Compression Tool

- .90" Jaw opening
- One handed operation
- Rotational head, rapid advance
- Audible bypass when predetermined pressure is achieved
- Eliminates need for dies
- Tested up to 75kV
- Connector Range:
 - ☐ Lugs & splices: 20 AWG-500 MCM

Huskie #	Weight
REC-6630-AT	11.4 lbs.



Burndy Patriot Battery Tools Include:

- 5 year limited warranty on tool
- Lifetime power train warranty on Infinity Drive and 1-year warranty on battery and charger
- Typically comes with a high impact formed carrying case, two batteries, charger and tool lanyard



Burndy #	Description
PAT4PC834-L1	18V, Li-Ion Battery with AC Charger
PAT4PC834-L1-DC	18V, Li-Ion Battery with DC Charger

Patriot PAT4PC834-LI Battery Powered Dieless Crimper, 4-Point

- 6 Ton output force
- Refined hydraulic system, field proven electronics
- C-Shaped head design with 360° head rotation
- Overmolded comfort-grip handle that allows for one-handed operation for advance, retract, and hold
- Crimping capacity:
 - ☐ CU-#8 up to 1,000 kcmil
 - ☐ AL-#8 750 kcmil
- Weight: 13.85 lbs.



Patriot PAT81KFT-LI Battery Powered Dieless Crimper, 4-POINT

- 12 Ton output force
- Refined hydraulic system, field proven electronics
- One-handed operation for advance, retract, and hold
- 360° Head rotation for tight areas
- No need to purchase and maintain dies
- Ergonomically balanced design
- Crimping capacity:
 - ☐ CU-#8 1,000 kcmil
 - ☐ AL-#8 750 kcmil
- Weight: 13.2 lbs.

Burndy #	Description
PAT81KFT-LI	18V, Li-Ion Battery with AC Charger
PAT81KFT-LI-DC	18V, Li-Ion Battery with DC Charger



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Burndy #	Description
PAT46-LI	18V, Li-Ion Battery with AC Charger
PAT46-LI-DC	18V, Li-Ion Battery with DC Charger
P15K	Cutter Die

Patriot PAT46-LI Battery Powered Crimping Tool

- 15 Ton output force, 2” jaw opening
- Redesigned field proven electronics
- Y46 Tool head, capable of using all “P” and “U” style dies
- C-Head crimp design with 355° head rotation
- Versatile tool head positioning for tight areas
- Overmolded ergonomic handle
- Retractable assist handle
- Crimping capacity:
 - ❑ CU-8 A WG-1,500 kcmil
 - ❑ AL-8 A WG-1,250 kcmil
- Weight: 25.5 lbs.

EK1550 Gator 15-Ton Battery Powered Crimper

- Crimping Force: 30,000 lbs.
- Includes handle (23492)
- Crimping capacity: (EK1550FT)
 - ❑ Color-coded copper lugs and splices: 8 AWG-1,500 kcmil
 - ❑ Aluminum lugs and splices; 8 AWG-1,250 kcmil
- Length: 18.5”, Weight: 16.3 lbs.
- Crimping capacity: (EK1550L)
 - ❑ Color-coded copper lugs and splices: 8 AWG-1,000 kcmil
 - ❑ Color-coded aluminum lugs and splices; 8 AWG-1,000 kcmil
- Length: 19-5/8”, Weight: 19 lbs.
- Accepts Kearney PH4/P14 dies without adapter

Greenlee #	Description
EK1550FTLU11	Crimping Tool w/120V Charger
EK1550FTLU12	Crimping Tool w/12V Charger
EK1550FTLU22	Crimping Tool w/230V Charger
EK1550FTLU120	Crimping Tool w/120V AC Adapter
EK1550FTLU230	Crimping Tool w/230V AC Adapter
EK1550L11	Crimping Tool w/120V Charger
EK1550L12	Crimping Tool w/12V Charger



Cembre #	Weight
B1500A	21.34 lbs.

15-Ton Robo-Crimp Compression Tool

- 2” Jaw opening
- Rotational head, rapid advance
- Includes DIE-CASE
- External pressure adjustment
- Audible bypass when predetermined pressure is achieved

Huskie #	Weight
REC-3610-AT	24 lbs.

18V Cordless Hydraulic Crimping Tool

- Accepts all “P” dies
- With the AU150-C adapter, it will accept all the semi-circular “U” Dies
- Connector Range
 - ❑ Copper: #8 AWG-1500 MCM
 - ❑ Aluminum: #8 AWG-1250 MCM
- Maximum pressure sensor and pressure relief valve assure greater precision
- 136kN Force developed
- OLED display for battery power, service requirement and crimping force being generated



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Description
EK12IDL11	Dieless Crimping Tool w/115V Battery Charger
EK12IDL12	Dieless Crimping Tool w/12V Battery Charger

EK12IDL Gator Dieless Crimper

- Dieless indent style crimping head does not require interchangeable crimping dies
- Crimping force: 24,000 lbs.
- Crimping capacity:
 - ❑ Copper color-coded lugs and splices: 4 AWG-1,000 kcmil
 - ❑ Aluminum color-coded lugs and splices: 6 AWG-1,000 kcmil
- Length: 16-1/2"
- Weight: 15 lbs.

Patriot PAT644-LI Battery Powered Dieless Crimper

- 11 Ton output force
- Refined hydraulic system, field proven electronics
- Overmolded comfort-grip handle that allows for one-handed operation for advance, retract, and hold
- No need to purchase and maintain dies
- 355° Head rotation for tight areas
- Crimping capacity:
 - ❑ CU-#6 1,000 kcmil
 - ❑ AL-#6 750 kcmil
- Weight: 16.3 lbs.

Burndy #	Description
PAT644-LI	18V, Li-Ion Battery with AC Charger
PAT644-LI-DC	18V, Li-Ion Battery with DC Charger



SL-510



Huskie #	Description	Weight
SL-510AT	Latched Head that fit's "U" Dies	13.55 lbs.
SL-C510AT	"C" Head with 1.65" Jaw Opening	14.9 lbs.

12-Ton Streamline Robo-Crimp Compression Tool

- One handed operation
- Tested up to 75kV
- Rotational head , rapid advance
- Audible bypass when predetermined pressure is achieved
- Connector Range:
 - ❑ Lugs & Splices-Up to 750 MCM Cu/Al

12-Ton Robo-Crimp

- 1.65" Jaw opening
- Accepts Kearney WH-2, PH-2 and WH-3 style dies (REC-5510KAT, 6510KAT)
- Accepts all "U" type dies (REC-5510AT, 6510AT)
- Rotational head, rapid advance
- Brush protection, ergonomically balanced for one handed operation
- Audible bypass when predetermined pressure is achieved
- Connector Range:
 - ❑ Lugs and Splices: Up to 750 MCM Cu/Al
- Weight: 13.5 lbs (6510)

Huskie #	Description
UDK-1	Kearney "U" style adapter for REC-6510K
REC-6510KAT	w/AC Charger
REC-6510KAT-DC	w/DC Charger
REC-6510AT	w/AC Charger



REC-6510AT



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Burndy #	Description
PAT750K-18V	18V, Ni-MH Battery with AC Charger
PAT750K-18V-DC	18V, Ni-MH Battery with DC Charger

Patriot PAT750K-18V Battery Powered Crimper

- 12 Ton output force
- One-handed operation for advance, retract, and hold
- Crimp head design with 355° head rotation
- Capable of using Kearney WH1/WH2 dies and all “U” style dies with KUADP adapter
- Ergonomically balanced design
- Smooth, quiet and efficient tool design
- Crimping capacity:
 - Tension sleeves-up to 477 ACSR
 - Taps-through 500 kcmil
 - Terminals-up to 1033 kcmil
- Weight: 18.4 lbs.

Patriot PAT750-LI Battery Powered Crimper

- 12 Ton output force
- Refined hydraulic system, field proven electronics
- One-handed operation for advance, retract, and hold
- 355° Head rotation for tight areas
- Capable of using all “U” style dies
- Ergonomically balanced design
- Crimping capacity:
 - Tension sleeves-CU #9 500 kcmil, AL #8 587 .2 kcmil, ACSR #4 556.5 kcmil
 - Taps-CU #14 500 kcmil, AL #8 500 kcmil
- Weight: 15.7 lbs.

Burndy #	Description
PAT750-LI	18V, Li-Ion Battery with AC Charger
PAT750-LI-DC	18V, Li-Ion Battery with DC Charger



Cembre #	Crimping Force
B1350L-CA	14.87 Tons

18V Cordless Hydraulic Crimping Tool

- 1.65” Opening of head
- Maximum pressure sensor and security valve assure greater precision
- OLED display for battery power, service requirement, crimping force being generated
- Low noise and minimal vibration
- 132 kN force developed
- Weight: 18.04 lbs.

EK1240 Gator 12-Ton Battery Powered Crimper

- Crimping force: 24,000 lbs.
- Crimping capacity (EK1240KL):
 - 8 AWG-750 kcmil copper color-coded lugs and splices
- Crimping capacity (EK1240K):
 - ACSR Terminals: 1033 kcmil
 - ACSR Tension fittings: 477 kcmil
- Length: 16-1/4”
- Weight: 15 lbs.

Greenlee #	Description
EK1240L11	Crimping Tool, 1.65” Opening, 120V Charger
EK1240L12	Crimping Tool, 1.65” Opening, 12V Charger
EK1240K L12	Crimping Tool, Kearney Head, 12V Charger
EK1240K L11	Crimping Tool, Kearney Head, 120V Charger



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee Gator Battery Powered Crimper's Feature:
 Intelligent crimping system technology includes a pressure sensor that monitors the crimping force of each crimp and provides the operator a visual and audible alert if the force is below specifications. Automatic retraction stop, LED light 2-Stage hydraulic system forward handle position, overmolded tacky grip, one trigger controls all tool functions, crimping head rotates 350° tools automatically retract when the crimping cycle is complete. Includes two 18V lithium-ion batteries, one smart charger and one carrying case

CCXL Gator Battery Powered Crimper/Cutter

- Multi-purpose with easily interchangeable crimping dies, cutter blades and knockout punch adapters

E12CCXL, 12-Ton

- When used with Greenlee KC12 and KA 12 dies in combination with Anderson, Blackburn, FCI Burndy, ILSCO, Panduit, Penn-Union and Thomas & Betts color-coded connectors, crimps on connections up to 750 kcmil are UL and cUL classified
- Accepts all industry “U” type dies
- Drives knockout punches through 5-5/8” diameter
- Length: 16-1/2”
- Weight: 15 lbs.

ECCXL, 6-Ton

- When used with Greenlee KC22 and KA22 dies in combination with Anderson, Blackburn, FCI Burndy, ILSCO, Panduit, Penn-Union and Thomas & Betts color-coded connectors, crimps on connections up to 600 kcmil are UL and cUL classified
- Accepts most dies used for 6-ton tools
- Drives knockout punches through 2” diameter
- Length: 16-1/2”
- Weight: 14 lbs.

Greenlee #	Description
E12CCXL11	12-Ton Tool w/120V Charger
E12CCXL12	12-Ton Tool w/12V Charger
ECCXL11	6-Ton Tool w/120V Charger
ECCXL12	6-Ton Tool w/12V Charger



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

EK425L Gator Battery Powered Crimper

- One handed operation
- Crimping jaws open wide to fit easily over connectors
- Jaws can be jogged closed until they just grip the connector, allowing the operator to position the cable in the connector before finishing the crimp
- Crimping tool will complete about 325 crimps per battery charge on 4/0 AWG splices
- When a crimp is fully completed the EK425L signals the operator can simply push a button on the back side of the tool
- Crimping force: 6 tons
- 18V Lithium-ion battery
- Crimping capacity:
 - ❑ 5/8” Service entrance connectors: 10-1/0 AWG
 - ❑ .840 Service entrance connectors: 1/0-4/0 AWG
 - ❑ Aluminum H taps: 6-4/0 AWG
 - ❑ Copper H taps: 10-2 AWG
 - ❑ Copper tension splices: 6-2/0 AWG
 - ❑ All aluminum tension splices: 6-4/0 AWG
 - ❑ 1-Piece ACSR tension splices: 4-1/0 AWG
 - ❑ 2-Piece ACSR tension splices: 2 AWG-477 kcmil
 - ❑ Aluminum jumper splices: 4 AWG-266.8 kcmil
 - ❑ Stirrups: 2-4/0 AWG
 - ❑ Copper color-coded lugs and splices: 8 AWG-500 kcmil
 - ❑ Aluminum color-coded lugs and splices: 8-4/0 AWG
- Weight: 6.8 lbs.

Crimping and Cutting Jaws



Greenlee #	Description
EK425LDO11	Crimping Tool w/CJD30 Jaws w/120V Battery Charger
EK245LDO12	Crimping Tool w/CJD30 Jaws w/12V Battery Charger
EK425LDBG11	Crimping Tool w/CJD3BG Jaws w/120V Battery Charger
EK425LDBG12	Crimping Tool w/CJD3BG Jaws w/12V Battery Charger
EK425LK12	Crimping Tool w/CJD3 Jaws w/12V Battery Charger
EK425L	Bare Tool Only w/Case

Greenlee #	Description
CJD3	Crimping Jaw Unit-”W” Dies
CJD3BG	Crimping Jaw Unit-D3 & B3 Die Grooves
CJD30	Crimping Jaw Unit-D3 & O Die Grooves
CJK	Crimping Jaw Unit-Thomas & Betts 6 Ton Dies
CJXPJ	Crimping Jaw with Nicopress X, P & J Die Grooves
CJB	Cutting Jaw for One Time Disposable Lock Hasps



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

6 Ton SL-ND Robo-Crimp with Changeable Head

- Forged jaws for long life
- Brush Protection
- Pull-pin design for quick jaw changes
- Bright white, LED lights for working in low light conditions
- Three compression heads-ND, O and BG
- Rotational head
- Audible bypass when predetermined pressure is achieved
- Connector range:
 - ❑ Lugs and splices: #8-500 MCM Cu, #8-350 MCM Al
 - ❑ H-Taps: Up to 4/0-4/00
- Weight: 8 lbs.
- Optional Heads Include:



Huskie #	Description
SL-NDOAT	D3 Nest w/"O" Jaw, w/AC Charger
SL-NDOAT-DC	D3 Nest w/"O" Jaw, w/DC Charger
SL-ND-BGAT	"BG" Jaw, w/AC Charger
SL-ND-BGAT-DC	"BG" Jaw, w/DC Charger



SL-CHCUAL



SL-CHACSR



SLBG-Jaw



SLND-Jaw



SLO-Jaw



SLCUT-Jaw



Huskie #	Description
ECO-EZOLAT	w/AC Charger
ECO-EZOLAT-DC	w/DC Charger
ECO-EZBGLAT	BG Jaw, w/AC Charger
ECO-EZBGLAT-DC	BG Jaw, w/DC Charger
ECO-EZOX	Tool Only w/case

6-Ton ECO-EZ Robo-Crimp with Changeable Head

- Switch between multiple heads with the pull-pin design
- Swivel head design allows the jaws to rotate 180°
- Brush protection
- Audible bypass when predetermined pressure is achieved
- Accepts all W & X type dies
- Connector Range:
 - ❑ Lugs and splices- #8-500 MCM Cu, #8-300 MCM Al
 - ❑ H-Taps-Up to 4/0-4/0
- Weight: 6 lbs.
- Optional Heads Include:



EZBG



EZND



EZK



EZO



XPJ-Jaw



6-Ton Steamline Robo-Crimp Compression Tool

- Lightweight, ergonomic design
- One handed operation
- Tested up to 75kV
- Compatible with all Huskie 14.4V Batteries
- Connector Range:
 - ❑ #8-500 MCM Cu, #8-350 MCM Al

Huskie #	Weight
IL-ND-AT	7.3 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Cembre #	Description
B54N-YD6	BG Nose Die
B54N-YD6-8	O Nose Die

18.0 V Cordless Hydraulic Crimping Tool

- One handed operation
- Jaws rotate 180° for ease of operation in confined spaces
- Quiet with minimal vibration
- Two batteries, AC charger and vinyl bag included
- Battery equipped with LED indicators that indicate remaining battery life
- 54 kN Force developed
- Capacity:
 - ☐ Copper Lugs & Splices: 300 MCM
 - ☐ Aluminum Lugs & Splices: 4/0
 - ☐ Aluminum H taps: 4/0-4/0
- Weight 6.49 lbs.

Patriot PATMD6-LI Battery Powered Crimper

- 6 Ton output force
- Refined hydraulic system, field proven electronics
- One handed operation for advance, retracts, and hold
- Overmolded handle, ergonomically balanced design
- Advance design high-speed pump
- 350° Rotatable head
- Pressure “pop-off” valve indicates completed crimp
- Ram holds position when trigger released
- Capable of using all “W” and “X” style dies
- Crimping capacity: CU, AL, ACSR, Steel, CUWeld, ALWeld, compressed/compact conductors, taps, splices, terminators, terminals
- Weight: 7.8 lbs.

Burndy #	Description
PATMD-6LI	18V, Li-Ion Battery with AC Charger Permanent BG (5/8”) and D3 Grooves
PATMD-6LI-DC	18V, Li-Ion Battery with DC Charger Permanent BG (5/8”) and D3 Grooves
PATMD6-8LI	18V, Li-Ion Battery, with AC Charger Permanent O and D3 Grooves
PATMD6-8LI-DC	18V, Li-Ion Battery with DC Charger Permanent O and D3 Grooves



Patriot In-Line PATMDCUT Battery Powered Cutter

- One handed operation
- Interchangeable scissor action jaws
- 350° Rotatable jaw assemblies
- Actuated blade guide
- One set of ACSR blades to cut all specified materials
- Includes durable carry bag, two batteries and charger
- Maximum cutting capacity:
 - ☐ CU-500 kcmil
 - ☐ AL-636 kcmil
 - ☐ ACSR-556.5 kcmil
 - ☐ EHS Guy strand/rebar/CUWeld/ALWeld-3/8”
- Weight: 8 lbs.



Burndy #	Description
PATMDCUTLI	18V, Li-Ion Battery with AC Charger
PATMDCUTLIDC	18V, Li-Ion Battery with DC Charger
PATMDCUTACSRKIT	Replaceable ACSR Blades Only



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

ESG25L Battery Powered ACSR Cutter

- Designed to cut distribution ACSR cable
- 18V Lithium-ion battery
- LED light
- Lightweight and easy to control
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tool automatically retracts when the cutting cycle is complete
- Overmolded tack grip
- Capacity:
 - ☐ 1" Maximum diameter
 - ☐ ACSR: 636 kcmil
 - ☐ Standard guy strand: 5/8"
 - ☐ Ground rod: 3/8"
 - ☐ Rebar: 3/8"
 - ☐ Wire rope: 1/2"
- Length: 15"
- Weight: 4.6 lbs.



Greenlee #	Description
ESG25L11	Cutter w/120V Charger
ESG25L12	Cutter w/12V Charger
ESG25LB	Bare Tool Only w/Case

Patriot Jaw Assemblies and Cover Kits

- Designed for use with PATMD in-line tools
- Options for both cutting and crimping



Burdny #	Description
PATJAWSCUT	Cutter Jaw w/Replaceable Blades
PATJAWSMD6	BG & D3 Grooves
PATJAWSMD66	D3 Groove Only (snub-nose)
PATJAWSMD68	O & D3 Grooves
PATJAWSMD6K	Kearney Groove Only (snub-nose)
PATMD66JC	Cover Kit for MD66 Jaw
PATMD6JC	Cover Kit for MD6 and MD68 Jaw
PATMD6KJC	Cover Kit for MD6K Jaw

6-Ton Robo-Crimp Cutting Tool

- Lightweight, ergonomic design
- One handed operation
- Rotational head
- Tested up to 75kV
- Compatible with all Huskie 14.4V Batteries
- Weight: 6.8 lbs.



ECO-500



Huskie #	Cutting Capacities
ECO-336-AT	ACSR-336 MCM Aluminum- 1.2" Copper-500 MCM
ECO-500-AT	ACSR-Do Not Cut Aluminum-Up to 1.5" Copper-Up to 500 MCM

Gear-Driven Cable Cutter

- 2-1/8" Jaw opening
- One handed operation
- Safety lockout switch
- Upgraded motor and gear system with improved ergonomic handle



Huskie #	Cutting Capacities	Weight
REC-54ACM-AT	Aluminum: 1500 MCM Copper: 1000 MCM	7.2 lbs.
REC-54MAT	ACSR: 1590 MCM Copper: 750 MCM	8 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

9-Ton Robo-Cut Cutting Tool

- 3.3" Jaw opening
- Open scissor jaw for easy cable insertion
- One handed operation
- Rotational head, rapid advance
- Sidebar handle for stability and balance
- For copper and aluminum only
- Cutting capacities:
 - Aluminum: 3"
 - Telecommunication: 3"
 - Lead Sheath: 2.5"

Huskie #	Weight
REC-685YC-AT	14.7 lbs.



S624



Huskie #	Description
REC-S624CCAT	w/AC Charger
REC-S624CCAT-DC	w/DC Charger
REC-S640AT	w/AC Charger

8-Ton Robo-Cut

- Designed to cut the toughest steel used in construction today
- .95" Jaw opening (S524CC, S624CC)
- 1.6" Jaw opening (S540AT, S640AT)
- Flip-top, rotational latching head, one handed operation
- Overload bypass protection
- Cutting capacities (S524CC, S624CC):
 - ACSR-477 MCM
 - Standard guy wire-5/8"
 - EHS Guy wire-9/16"
 - Ground Rod-5/8"
 - Rebar (Sc 40)-5/8"
- Cutting capabilities (S540AT, S640AT):
 - ACSR-1590 MCM
 - Ground rod-5.8"
- Weight: 10 lbs.

Patriot PATHCC10-18V Battery Powered C-Head Cutter

- C-Shaped style head and large opening
- 355° Tool head swivel
- Retractable assist handle
- Blade alignment technology with four different interchangeable blade types
- Maximum cutting capacity:
 - Cu/Al Cable-up to 1.5" (HCCCUAL blades)
 - HCCACSR up to 1,590 kcmil (ACSR/ACSS blades)
 - Ground Rod-up to 3/4" (HCCSOL blades)
 - Soft steel bolts-up to 5/8"
 - Std & EHS Guy-9/16" (GUY blades)
- Weight: 20.4 lbs.

Burndy #	Description
PATHCC10-18V	18V, with AC Charger
PATHCC10-18V-DC	18V, with DC Charger



Huskie #	Weight
REC-634YC-AT	9.9 lbs.



6.6-Ton Robo-Cut Cutting Tool

- 1.4" Jaw opening
- Open scissor jaw for easy cable insertion
- Rotational head, rapid advance
- Overload bypass protection
- For copper and aluminum only
- Cutting Capacities:
 - Copper-800 MCM
 - Aluminum 1.4" O.D.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Patriot PATCUT129-LI Battery Powered Cutter

- Latch head design
- Overmolded comfort grip handle that allows for one handed operation for advance, retract, and hold
- 180° Head rotation
- Versatile tool head positioning for tight areas
- Maximum Cutting Capacity:
 - ❑ CU/AL-1.29"
 - ❑ ACSR-1,113 kcmil
 - ❑ Ground rod/rebar/soft steel bolts-5/8"
 - ❑ Std Guy wire-1/2"
 - ❑ EHS Guy wire-3/8"
- Weight: 10.2 lbs.

Burndy #	Description
PATCUT129-LI	18V, Li-Ion Battery with AC Charger
PATCUT129-LI-DC	18V, Li-Ion Battery with DC Charger



Burndy #	Description
PATCUT2156-LI	18V, Li-Ion Battery with AC Charger
PATCUT2156-LI-DC	18V, Li-Ion Battery with DC Charger

Patriot PATCUT2156-LI Battery Powered Cutter

- Latch head design
- 180° Head rotation
- Versatile tool head positioning for tight areas
- Advance design high-speed pump completes tough cuts faster and provides longer life, efficiency and reliability
- Maximum cutting capacity:
 - ❑ CU/AL-2.0"
 - ❑ ACSR-2,156 kcmil
 - ❑ Ground rod-up to 3/4"
 - ❑ Rebar-up to 5/8"
 - ❑ Soft steel bolts-up to 3/4"
 - ❑ Std Guy wire-up to 9/16"
 - ❑ EHS Guy wire-up to 9/16"
- Weight: 15.5 lbs.

Patriot PATCUT245CUAL Battery Powered Cutter

- Ergonomic design, one hand operation
- Advance design high-speed pump, 180° head rotation
- Versatile tool head positioning for tight areas
- Mechanical ram release
- Maximum cutting capacity:
 - ❑ Copper and aluminum cable only-up to 2.45" OD
- Weight: 14.5 lbs.

Burndy #	Description
PATCUT245C UAL-18V	18V, Battery with AC Charger
PATCUT245C UAL-18V-DC	18V, Battery with DC Charger
PATCUT245-LI	18V, Li-Ion Battery with AC Charger
PATCUT245-LI-DC	18V, Li-Ion Battery with DC Charger



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Burndy #	Description
PATMDCUT48LLI	18V, Li-Ion Battery, 48" w/ AC Charger
PATMDCUT60LLI	18V, Li-Ion Battery, 60" w/ AC Charger
PATMDCUT72LLI	18V, Li-Ion Battery, 72" w/AC Charger



Patriot In-Line Battery Powered Pole Cutters

- Used with interchangeable MD6 Series jaw assemblies
- 350° Rotatable jaw assemblies for operation in virtually any position
- Ram holds position when the trigger is released allowing the operator to check alignment prior to the cut
- Interchangeable scissor action jaws allow to crimp or cut with the same tool
- Large hand grip area allows easier operation with gloves
- Ergonomically balanced tool design helps to lessen the operator fatigue
- Tool assembled with quality EPOXIGLAS poles per ASTM F711
- Actuated blade guide, automatically closes for easy positioning on cable and allows large diameter cable to be cut
- Includes durable high strength carry bag, two batteries and charger
- Maximum cutting capacity:
 - CU-500 kcmil
 - AL-636 kcmil
 - ACSR-556.5 kcmil
 - EHS Guy strand/CUWeld /ALWeld/rebar-3/8" diameter
- Weight:
 - 48"-12 lbs.
 - 60"-14 lbs.
 - 72"-17 lbs.

CCX Tool Blades and Adapters



Greenlee #	Description
UC40	Cutter Blades for AL & CU 1-1/2" Capacity
UCACSR	Cutter Blades for ACSR & Guy Strand
UA12P	Punch Driver Adapter (Accepts 3/4" Draw Stud)
UAW	Adapter for Burndy "W" and Panduit "CD-2001" Dies

18V Cordless Hydraulic Cutting Tool

- Manufactured from high strength, heat treated steel
- Double speed action
- Rotatable head by 180°
- Fitted with a maximum hydraulic pressure valve
- Low noise and minimal vibration
- Specifically designed to cut copper, aldre, aluminum, aluminum-steel cables, steel ropes having a max overall diameter of 1", guy wire up to 7/8" and steel ground rod up to 5/8"

Cembre #	Weight
B-TC250YA	10.56 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Description
ES20L11	ACSR Cutter with 120V Charger
ES20L12	ACSR Cutter with 12V Charger
ES20LB	Bare Tool Only w/Case

ES20L Battery Powered ACSR Cutter

- Designed to cut distribution ACSR cable
- Scissor style blades make it easy to cut short tag ends on tap cables in H-tap connectors
- One trigger controls all tool functions
- Cutting head rotates 350°
- 18V Lithium ion battery
- LED light
- Capacity:
 - ❑ Cutter head opening 3/4"
 - ❑ ACSR 336 kcmil
 - ❑ Guy strand 3/8"
 - ❑ Ground rod 3/8"
 - ❑ Rebar 3/8"
- Length: 15"
- Weight: 4.6 lbs.

ESG45L Battery Powered ACSR Cutter

- Designed to cut ACSR, guy strand and ground rods
- 18V Lithium-ion battery
- Retraction stop allows the operator to stop the retraction at any point simply by tapping the trigger
- LED light
- 2-Stage hydraulic system
- Forward handle position
- One trigger controls all tool functions
- Cutting head rotates 350°
- Capacity:
 - ❑ ACSR: 1,590 kcmil
 - ❑ EHS Guy strand: 1/2" diameter
 - ❑ Standard guy strand: 5/8" diameter
 - ❑ Ground rod: 5/8" diameter
 - ❑ Rebar: 1/2" diameter
 - ❑ Wire rope: 5/8" diameter
 - ❑ Soft steel bolts: 5/8" diameter
 - ❑ Copper and aluminum cable: 1,500 kcmil
- Length: 16-5/8"
- Weight: 13 lbs.

Greenlee #	Description
ESG45L11	ACSR Cable Cutter with 120V Charger
ESG45L12	ACSR Cable Cutter with 12V Charger
ESG45LB	Bare Tool Only w/Case



Greenlee #	Description
ES32L11	Cutter with 120V Charger
ES32L12	Cutter with 12V Charger

ES32L Battery Powered Cable Cutter

- Small size makes this an excellent tool for use inside panel box
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tool automatically retracts when cutting cycle is complete
- Capacity:
 - ❑ 500 kcmil Cu or Al Cable
- Length: 15-1/2"
- Weight: 5 lbs



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

ESG55L Battery Powered ACSR Cutter

- Designed to cut the largest ACSR cables, ground rods and guy strands
- 18V Lithium-ion battery
- Retraction stop allows the operator to stop the ram retraction at any point simply by tapping the trigger
- LED light
- 2-Stage hydraulic system
- Forward handle position
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tool automatically retracts when the cutting cycle is complete
- Overmolded tacky grip
- Capacity:
 - ❑ ACSR: 2515 kcmil
 - ❑ Guy strand: 5/8"
 - ❑ EHS Guy strand: 9/16"
 - ❑ Ground rod: 3/4"
 - ❑ Rebar: 5/8"
 - ❑ Soft steel bolts: 3/4"
- Length: 18"
- Weight: 17.5 lbs.



Greenlee #	Description
ESG55L11	Cutter w/120V Charger
ESG55L12	Cutter w/12V Charger
ESG55LB	Bare Tool Only w/Case

ESG50L Battery Powered Cable Cutter

- Used for cutting copper and aluminum power cables
- 18V Lithium-ion battery
- Retraction stop allows the operator to stop the ram retraction at any point simply by tapping the trigger
- LED light
- 2-Stage hydraulic system
- Forward handle position
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tools automatically retract when the cutting cycle is complete
- Overmolded tacky grip
- Capacity: 2" diameter aluminum or copper cable
- Length: 15-3/4"
- Weight: 9.8 lbs.



Greenlee #	Description
ESG50L11	Cable cutter w/120V Charger
ESG50L12	Cable cutter w/12V Charger
ESG50LB	Bare Tool Only w/Case

LS50L Battery Powered Knockout Kit

- Punch holes from any angle with the 360° rotating head
- Punches up to 6" holes in 14 gauge mild steel and 2" holes in 14 gauge stainless steel
- Slim, compact and lightweight design for reduced fatigue and easy control
- Automatic retraction prevents damage to punch and die
- One trigger controls all tool functions, no additional manual work required
- Non-slip rubber grip for firm and comfortable hold
- LED light illuminates dark work areas
- Maximum punch force 6-tons
- Includes:
 - ❑ LS50L battery driver
 - ❑ 18V Lithium-ion battery
 - ❑ 120V battery charger
 - ❑ Spacer (1924AA)
 - ❑ 3/4-16 x 4 drawstud (31872)
 - ❑ 3/8 x 4.8 drawstud (209633)
- Weight: 5 lbs.

Greenlee #	Description
LS50L11A	Punching Tool Kit
LS50LB	Bare Tool Only w/Case



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



“W” Style Dies

Dies for use with service entrance connectors, c-taps, overhead and underground connectors. (Use with EK425L with CJD3, CJD3BG & CJD30 jaws). Use with EK425L with CJK jaws with F020735 adapters.

More popular dies are shown, complete list is available.

EK1550L Die Adapters

Greenlee #	Description
48824	Adapter for Kearney PH2/WH2 Dies
48820	Adapter for Burndy “P” Dies (Y46), IlSCO ILD-P Dies
48802	Adapter for Greenlee and Burndy 12-Ton Dies, ILD Dies, T&B and Blackburn 15500 Dies



Greenlee #	Description
930	High Speed Steel Cutter Kit

High Speed Steel Cutter Kit

- Lasts 10 times longer than standard hole saws
- Precision-ground teeth cuts smooth, burr-free holes
- Capacity: 1/4”
- Durability and speed provide low cost per hole
- Split-point pilot drill prevents “walking”-makes accurate hole placement easy
- Spring-loaded slug ejector
- No tool required to change cutter sizes
- Less chance of broken teeth because the saw body is machined out of solid, high-speed steel
- Includes:
 - 7/8” to 2-1/2” cutters
 - Two small arbors for extended assembly to 7/8” and 1-1/8” cutters
 - Larger arbor
 - Hex Wrench
 - Case
- For conduit sizes 1/2” through 2”

“U” Style Die Adapter Set

- “U” Style for Greenlee and Burndy “U” Style, ILSCO ILD, T&B, 15500, and Blackburn



Greenlee #	Description
UA15T	U-Style Die Adapter Set (EK1550FT)



Burndy #	Description
W-BG	W-Die for 6-Ton Tools
W-C	W-Die for 6-Ton Tools
W-K840	W-Die for 6-Ton Tools
W-O	W-Die for 6-Ton Tools

Burndy W-Dies

- Most popular versions are shown
- A complete selection of W, U and other die options are available



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Type “U” Die Kit

- CU-Comes complete with 15 “U” die sets for crimping #6 AWG through 750 kcmil copper
- AL-Comes complete with 15 “U” die sets for crimping #6 AWG through 750 kcmil aluminum
- HYGRD-Comes complete with eight die sets for crimping HYGROUND irreversible compression grounding connectors

Burndy #	Description
UDIEKITAL	Aluminum Crimping Die Set, with Case
UDIEKITCU	Copper Crimping Die Set, with Case
UDIEKITHYGRD	HYGROUND Crimping Die Set, with Case



Huskie #	Description
HTK-1-182H	Kearney Equivalent 1-1/8”
HTK-BKT	Kearney Equivalent BKT Die
HTK-D	Kearney Equivalent D Die
HTK-N-3	Kearney Equivalent N Die
HTK-1-516H	Kearney Equivalent 1-15/16” (Hex)

HTK Series Dies

- Equivalent to Kearney WH-2 (10.77) and WH-3 (12T) type dies

Die Kits

- For 6 and 12 ton tools
- Includes almost all aluminum and copper dies needed

Greenlee #	Description
KD12AL	For 12-Ton Tools, 6 AWG to 750 kcmil Aluminum Connectors
KD06AL	For 6-Ton Tools, 8 AWG to 350 kcmil Aluminum Connectors
KD12CU	For 12-Ton Tools, 6 AWG to 750 kcmil Copper Connectors
K22S1GL	For 6-Ton Tools, 8 AWG to 600 kcmil Copper Connectors



Huskie #	Description
CH-94	AC Charger Kit
CH-94DC	DC Charger Kit

CH-94 Battery Charger

- 110V AC Power Cord
- Designed for Huskie Lithium Ion batteries only
- Redesigned contact terminals for stronger engagement with battery
- UL/CUL Agency Approvals
- Monitors battery temperature and battery voltage for correct charging
- One hour charge time



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

BP-84 Battery Pack, Lithium Ion

- Lightweight, high capacity 4.0Ah Battery Pack
- 50% longer run times as compared to NiCad
- No memory effect
- Impact resistant housing
- Performance is minimally affected by extreme temperatures
- Minimal self-discharge
- Non-hazardous chemistry and environmentally safe
- BP-84 can be charged with any Huskie Lithium Ion chargers (including CH-80, CH-90 & CH-94)

Huskie #	Description
BP-84	4.0Ah Battery Pack



Greenlee #	Description
RAM3GL	9.6V, 3.0Ah Battery

Battery

- High capacity NIMH battery
- For old style EK425 tools

18V LXT Lithium-Ion Battery

- 30-minute charge time when used with Makita's rapid optimum charger
- Battery resists self-discharge and remains ready for use even after long periods of storage
- Compatible with certain Greenlee and Burndy power tools
- Memorizes the usage history for efficient recharges

Makita #	Description
BL1830	18V Lithium-ion, 3Ah



Makita #	Description
DC18RC	18V Rapid Battery Charger, 110V AC
DC18SE	18V Battery Charger, 12V DC

Li-Ion Battery Charger

- Optimal charging method is achieved using three Active Controls (thermal, voltage, and current) to maximize the effectiveness of the charge and extend the battery's life
- Recognizes battery's history and analyzes battery condition to determine optimal charging method
- Advanced CUP communicates with individual's battery's memory chip
- Built-in fan to cool the battery during charging to maximize the life of the battery



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

7/16" Quick Connect Hydraulic Impact Wrench

- Reverse-flow check valve prevents operation if the tools is plumbed backwards
- Built in selector for open center or closed center systems
- 500 ft/lbs. torque
- Large trigger
- Weight: 7 lbs.

Stanley #	Description
ID07810	High Impact Wrench



Burndy #	Description
HIW716MAG	MAG Hydraulic Impact Wrench, Variable Torque

HIW716 MAG Low Pressure Hydraulic Impact Wrench

- Aircraft grade extruded aluminum body and forged handle
- Frictionless gerotor motor
- Injection molded replaceable comfort grips
- Glove-sized handle and activation trigger
- Reduced handle-to-trigger distance
- Reverse flow and hook-up prevention
- Dual spool selector for open and closed center use
- Over 550 ft-lbs. of torque
- Optimal pressure: 1,000-2,250 psi
- Weight: 7.6 lbs.

HIW716 Enforcer Hydraulic Impact Wrench

- 7/16" Tri-ball quick chuck
- Dual torque selector spool
- CNC Machined billet aluminum
- Dual spool open/closed operation
- Optimal pressure: 750-2,000 psi
- 515 ft/lbs. Torque
- Weight: 5.95 lbs.

Burndy #	Description
HIW716ENF	Enforcer Hydraulic Impact Wrench, Variable Torque



H8508 1/2" Impact Wrench

- Twin-hammer impact mechanism provides high performance and reliability
- Button to switch between forward and reverse rotation
- 1-Piece handle and impact housing casting provide long life
- Super Spool permits quick switches between open center and closed center hydraulic systems
- Heat-insulated handle, ergonomically positioned for comfort
- Well balanced for comfortable operation
- Includes the 49314 heavy-duty 1/2" square drive adapter
- Operating pressure: 1,000-2,000 psi
- Maximum torque: 400'-lb @ 8 gpm
- Capacity: 7/16" hex
- Length: 8.2"



Greenlee #	Description
H8508-1	High Torque 1/2" Impact Wrench with 7/16" Hex Quick Change Chuck, 7.4 lbs.
H8508-1V	High Torque 1/2" Impact Wrench w/Flow Control & 7/16" Hex Quick Change Chuck, 7.7 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

HW1 1/2" Hydraulic Impact Wrench

- Impact and temperature resistant replaceable polymer grip designed to dissipate heat from the cast handle
- Improved center-of-gravity for superior ergonomics
- Increased service life with the addition of back-up rings and larger O-rings
- Built-in hydraulic check valve
- Large and strong lifting eye for easy and secure storage
- Longer and wider trigger
- Fast and easy change between open center systems and closed center systems with no disassembly required
- Higher breaking torque in reverse to ensure you can remove tightened bolts
- Cast motor enclosure that better protects the impact mechanism operation versus competing models with stamped steel enclosure
- Includes the 49314 heavy-duty 1/2" square drive adapter
- Operating pressure: 1,000-2,500 psi
- Capacity: 7/16" hex
- Length: 8.2"
- Weight: 6.5 lbs.
- Maximum torque: 500'-lb @ 8 gpm



Greenlee #	Description
HW3	High Torque 3/4" Impact Wrench

HW3 3/4" Hydraulic Impact Wrench

- High torque 3/4" impact wrench with 3/4" square drive with auxiliary handle
- Forward positioned handle for improved balance and reduced fatigue
- Impact and heat-resistant Cool Grip handle+ dissipates heat
- Large onboard lifting eye for easy and secure storage
- Industry-leading weight to torque ratio
- Quickly change between forward and reverse motions with direct control selector
- Adjustable torque setting with variable flow knob
- Operating pressure: 1,000-2,500 psi
- Capacity: 3/4" square
- System: super spool selector control
- Length: 9.3"
- Weight: 10.5 lbs.



Greenlee #	Description
HW1	High Torque 1/2" Impact Wrench with 7/16" Hex Quick Change Chuck
HW1V	High Torque 1/2" Impact Wrench with Torque Adjustment & 7/16" Hex Quick Change Chuck

Nail Eater Extreme Auger Bits

- Quickly bore through creosoted and salt-treated utility poles
- Resists wear, eats through nails and staples
- Self-feeding screw point draws the bit through the wood
- 7/16" Hex shank to fit impact drivers
- Available in 18" overall length



Greenlee #	Size	Hole Diameter	Hardware Diameter
37868	9/16"	5/8"	1/2"
37869	11/16"	3/4"	5/8"
37870	13/16"	7/8"	3/4"
37871	15/16"	1"	7/8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Greenlee #	Description
LP6-01	Bare, No Coupler, Open Center
LP6-02	Bare, No Coupler, Closed Center
LP6-05	CJD3BG Jaw, No Coupler, Open Center
LP6-06	CDJ3BG Jaw, No Coupler, Closed Center
LP6-09	CJD30 Jaw, No Coupler, Open Center
LP6-10	CJD30 Jaw, No Coupler, Closed Center
LP6-13	CJD3 Jaw, No Coupler, Open Center
LP6-14	CJD3 Jaw, No Coupler, Closed Center
LP6-17	CJK Jaw, No Coupler, Open Center
LP6-18	CJK Jaw, No Coupler, Closed Center

LP6 6-Ton Hydraulic Crimper

- Interchangeable crimping and cutting jaws
- Spring-loaded quick-release pin
- 350° Rotating head
- Maximum inlet pressure: 2,500 psi
- Operating pressure: 1,500-2,500 psi
- Pressure and return ports: 3/4-16 SAE O-ring
- Weight: 8.4 lbs.



Hydraulic Cutting Heads

- For overhead line applications
- Hydraulic Cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 10,000 psi max



Cembre #	Description	Weight
TC055	2.17" Diameter Max Cut	14.52 lbs.
TC04	1.57" Diameter Max Cut	8.8 lbs.

RHCC10 Remote Power Cable Cutter

- Reinforced C-head design for field and OEM applications
- Interchangeable precision cutting blades for copper, aluminum, ACSR, EHS guy strand, ground rod and rebar
- Steel cylinder
- 10,000 psi, 13.2 lbs.
- Maximum cutting capacity
 - ❑ Cu/Al Cable-up to 1.5" (HCCCUAL blades)
 - ❑ ACSR/ACSS-up to 1,590 kcmil (ACSR/ACSS blades)
 - ❑ Ground Rod-up to 5/8" (HCCSOL blades)
 - ❑ Rebar-up to 1/2" (HCCSOL blades)
 - ❑ Soft steel bolts-up to 5/8"
 - ❑ Std & EHS Guy-9/16" (GUY blades)



Burdny #	Description
RHCC10	Remote Powered Hydraulic Cable Cutter

Y46 HYPRESS Remote Operated Hydraulic Tool

- 15-Ton output force
- Works on commonly used copper and aluminum products
- Compact C-shaped head with 2" jaw opening
- Forged steel construction
- Positive push button die lock buttons
- UL Listed and CSA certified compression terminal, splice and tap connectors when tool is used to install
- Operating pressure: 10,000 psi
- Requires "P" Series dies
- Weight: 16 lbs.



Burdny #	Description
Y46	Remote Head Hydraulic Tool
P15K	Cutter Die



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Y750BHXT HYPRESS Remote Operated Hydraulic Tool

- 12-Ton output force
- C-Shaped head with 1.65" opening
- Infinitely rotatable head
- Uses all standard "U" Series dies
- Positive die lock buttons
- Operating pressure: 10,000 psi
- Hot stick adapter sold separately
- Weight: 10.3 lbs.

Burndy #	Description
Y750BHXT	Remote Head Hydraulic Tool



LPK1240K 12-Ton Kearney Low Pressure Crimper

- No high pressure intensifier required
- Relief valve signals operator when crimp is complete
- Compatible with dies for Kearney PH-2 and PH-3 tools
- Head rotates for easy tool positioning
- Powered in both the advance and retract directions to prevent hang ups
- Relief valve assures 12 ton crimp with 1,500-2,500 psi system
- Crimping force: 24,000 lbs. @ 1,500 psi
- Open and closed center hydraulic system
- Weight: 19.5 lbs.

Greenlee #	Length
LPK1240K	20.3"



LPK1550FT 15-Ton Flip-Top Crimper, Low Pressure

- Accepts P-style die to crimp splices and lugs up to 1500 kcmil copper and 1250 kcmil aluminum
- Accepts Greenlee KC12, KA 12 and KD12 crimping dies as well as industry U-style dies with options UA 15T adapters
- Lightweight flip-top head with patented quick release locking pin
- 2" Jaw opening
- Crimping head rotates 350°
- Crimping force: 30,000 lbs.
- Crimping capacity:
 - Color-coded copper lugs and splices: 8 AWG-1500 kcmil
 - Aluminum logos and splices: 8 AWG-1250 kcmil
- Open and closed center hydraulic system

Greenlee #	Length	Weight
LPK1550FT	23.5"	25 lbs.
UA 15T	Adapter for Greenlee and Burndy "U" Style Dies, Ilco ILD Dies, T&B and Blackburn 15500 Dies	

LPK1550 15-Ton Universal Low Pressure Crimper

- No high pressure intensifier required and crimps cable 500 MCM and larger
- Relief valve signals operator when crimp is complete
- Compatible with dies for:
 - Kearney PH2 and PH4/PH14
 - Burndy Y35 and Y46
 - Penn-Union TPU-15PH
 - Thomas & Betts TBM 15 PF
- Operating pressure: 1,500-2,500 psi
- Crimping force: 30,000 lbs. @ 1,500 psi
- Open and closed center hydraulic system
- Weight: 28.6 lbs.

Greenlee #	Length
LPK1550	23.8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

12-Ton Low Pressure Crimper

- No high pressure intensifier required
- Relief valve signals operator when crimp is complete
- Compatible with dies for:
 - ☐ Burndy Y35
 - ☐ Alcoa 12A, 12AC, 12HA, 12HAC
 - ☐ Anderson HC-12, HC-12H
 - ☐ Thomas & Betts 12-ton (LPK1230)
- Accepts standard “U” style dies (LPK1230)
- Crimps up to 750 MCM copper and aluminum (LPK1240)
- Head rotates for easy tool positioning
- Powered in both the advance and retract directions to prevent hang-ups
- Relief valve assures 12 ton crimp with 1,500-2,500 psi system
- Crimping force: 24,000 @ 1,500 psi
- 3/4-16 SAE O-ring
- Open and closed center hydraulic system




Greenlee #	Length	Weight	Jaw Opening
LPK1230	19.3”	18.5 lbs.	1.20”
LPK1240	20.3”	19.7 lbs.	1.65”



Burndy #	Description
LHPY750XT	Kompressor Hydraulic Compression Tool

LHPY750XT Low Pressure Hydraulic Compression Tool

- 12-Ton output force
- Covers a wide range of applications with 1.65” jaw opening
- 350° Head rotation for versatile tool head positioning in tight areas
- Uses all standard BURNDY “U” dies
- Operates on open center or closed center hydraulic systems
- Double acting tool for hydraulic ram advance and retraction
- Operating pressure: 1,500-2,500 psi (103-172 BAR)
- Weight: 21 lbs.



RHU600 Hydraulic Presshead Crimper

- Hydraulic presshead complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 10,000 psi max
- Weight: 49.28 lbs.

Cembre #	Description
RHU600	600 kN Force Developed



Cembre #	Description
RHU1000	1100 kN Force Developed

RHU1000 Hydraulic Presshead

- 123 Ton hydraulic presshead for full tension, transmission and substation connections, complete with quick automatic coupler for connection to hydraulic pumps with a working pressure of 10,000 psi max
- Will accept all semi-circular slotted dies common to most 100 ton heads
- Die cap is removable for an easy connector positioning; the upper part of the cap automatically rotates during the die changing process to present the correct positioning of the die
- Lifting eye included
- Weight: 111.32 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

60-Ton Compression Head

- Ram Stroke: 1.5” Travel
- Designed for ACSR & ACAR Transmission and Distribution Cable
- Ultra light titanium model available
- Extremely portable

Huskie #	Order Data	Oil Volume
EP-60WB	Steel, Single Acting Compression Head	312 cc
EP-60DT	Titanium Model	312 cc
EP-60D	Steel, Double Acting Compression Head	303 cc
EP-60DT	Titanium Model	303 cc



EP-60WB



EP-60DT



Huskie #	Weight
EP-100WD	78 lbs.

100-Ton Compression Head, Double-Acting

- 1.16” Ram stroke
- Designed for full tension transmission and substation connections
- Double acting hydraulic cylinder for quicker return times
- Removable die caps for easy cable insertion
- Oil required: 25 cu/in

RK6040 Single Acting 60-Ton Crimper

- Ideal tool for use in substation and transmission construction
- Accepts Burndy L dies and Alcoa 6000 series crimping dies
- After completing a connection, the top of the head easily swivels 90° and can be lifted from the tool to remove the connector
- Removing the tool from the stand exposes a lifting eye for when the tool must be used above ground level
- Requires 10,000 psi single-acting hydraulic power source
- Includes steel carrying case with storage space for dies
- Crimping force: 120,000 lbs @ 10,000 psi
- Capacity:
 - Copper stranded code cable: 300-2000 kcmil
 - Aluminum stranded code cable: 250-2000 kcmil
 - Copper tension sleeves: 1/0 AWG-1000 kcmil
 - Aluminum tension sleeves: 1/0 AWG-2300 kcmil
 - ACSR Tension Sleeves: 1/0 AWG-2156 kcmil
 - Copper aerial connectors: 4/0 AWG-2500 kcmil
 - Aluminum aerial connectors: 3/0 AWG-2500 kcmil
- Equipped with 3/8” screw type hydraulic couplers
- Weight: 45 lbs.

Greenlee #	Description
RK6040	60-Ton Crimping Tool, Single Acting



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

12-Ton Remote Compression C-Head

- 1.65" Jaw opening
- Protective rubber boot on "C" Head
- Accepts all "U" type dies
- Connector Range:
 - ☐ Lugs & Splices: Up to 750

Huskie #	Weight
EP-510HC	11 lbs.



12-Ton Remote Compression C-Head

- 1.5" Jaw opening
- Protective rubber boot on "C" head
- Accepts PH-2, WH-2 and WH-3 style dies
- Connector Range
 - ☐ Lugs & Splices: Up to 1033 MCM Stranded, 477 ACSR

Huskie #	Weight
EP-510HK	13.5 lbs.



15-Ton Remote Compression C-Head

- 2" Jaw opening (1.5" with "U" Die Adapter)
- Protective rubber boot on "C" head
- 3/8" male screw type coupler provided
- Connector Range:
 - ☐ Aluminum: #8 AWG-1250 MCM
 - ☐ Copper: #8 AWG-1500 MCM

Huskie #	Weight
EP-610H	14.5 lbs.



Greenlee #	Length	Weight
43178	62.5"	8.5 lbs.
38568	75.0"	9.25 lbs.
43177	88.5"	9.75 lbs.

Long Reach Chainsaws

- Cuts hard-to-reach branches from aerial basket or from the ground
- Super spool selector control for use on open and closed center hydraulic systems
- Insulated fiberglass extension tubes, tested to meet OSHA regulation 1910.269
- Safety features include two-step trigger, trigger guard and fully covered sprocket guard
- Anti-kickback chain and automatic chain oiler
- Rugged high torque gear motor
- Unfilled and foam filled extension tube versions offered
- Cutting capacity: 13"
- Operating pressure: 1,000-2,000 psi

Greenlee #	Length	Cutting Capacity	Weight
HCS816	31.5"	16"	9.5 lbs.
HCS820	35.5"	20"	10.2 lbs.
HCS8160CB (w/chain brake)	31.5"	16"	9.5 lbs.
HPS513	26.5"	13"	8.5 lbs.
HPS513CB (w/chain brake)	26.5"	13"	8.5 lbs.



Hydraulic Chainsaws

- Ideal for large trimming applications and cut-up removal jobs
- Chain and bar can be adjusted without removing sprocket cover
- Sprocket cover can be removed without tools for easy saw cleaning
- Handle position can be oriented to horizontal or to 60° or 30° relative to bar and chain to user preference
- Rugged gear motor and expanded chip exit area
- Automatic chain oiler can be adjusted without tools
- Safety features include two-step safety trigger, high impact polymer front handle/shroud, wide lower handle protects hands/knuckles and chain catcher stops chain rotation
- Reduced kickback bar and chain
- Supplied with 12" steel braided whip hoses
- Chain size: 3/8" pitch
- Operating pressure: 1,000-2,000 psi
- Open and close center system
- HCS Standard grip, HPS pistol grip
- HTMA Couplers shown additional



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Jaw Opening	Length	Weight
HRD-58	5/8"	25-1/2"	45 lbs.
HRD-1	1"	25-1/2"	45 lbs.

HRD Ground Rod Driver with Valve

- Deep rod opening and smooth operation ensures that the driver will not jump off of rods
- Lightweight allows easy mounting on top of rods
- Can be used with open and closed center hydraulic systems
- Dual guide rods provide excellent control for driving rods straight and the remote on/off valve makes it easy to control the depth of the rod
- Maximum input pressure: 2,000 psi

Tamper Assembly

- Makes quick work of setting poles, asphalt patch and general construction backfill compacting
- Only three moving parts for low maintenance
- Kidney-shaped foot included
- Hose end valve-reversible on/off valve for open and closed center hydraulic systems
- Valve on tube-rotate trigger spool for open and closed center hydraulic systems
- H4802-6 unit does not include on/off valve
- Operating pressure: 1,000-2,000 psi
- System: open & closed center
- These items can be ordered with whip hoses and couplers, please contact us for additional info and pricing

Greenlee #	Length	Valve Location	Weight
H4802	60"	Hose End	23 lbs.
H4802-1	85"	Hose End	28 lbs.
H4802-3	72"	On Tube	23 lbs.
H4802-5	60"	On Tube	22 lbs.
H4802-6	60"	Hose End	23 lbs.



Greenlee #	Overall Length	Cutting Capacity
43180	82"	3.5"

Circular Saw Assembly

- Use for high production utility line clearing and general tree clearing applications
- Super spool selector control for open and closed center hydraulic systems
- Safety features include hand stop collar, trigger guard, two-step trigger and branch stop
- Insulated fiberglass extension tube, tested to meet OSHA regulation 1910.269
- Rugged gear motor
- Angular head design makes flush cuts easier and directs chips away from the operator
- 9" diameter blade standard
- Operating pressure: 1,000-2,000 psi
- Open and closed center system
- Weight: 9 lbs.

Hydraulic Booster Assembly

- Small and compact
- Operates 10,000 psi remote head tools
- Able to operate on either open or closed center hydraulic systems without making any changes to the tool
- Uses the Dynapress remote control valves and hose sets
- Supplied with pressure and return high pressure screw-type couplers
- Supplied with convenient foldable carrying handle and can be permanently mounted
- Input pressure: 1,000-2,200 psi
- Maximum back pressure: 200 psi
- Output pressure: 10,000 psi
- Port sizes: 1/4-18 NPSM
- Relief valve setting: 10,000 psi
- Return port: 3/4-16 SAE O-ring
- System: open and closed center

Greenlee #	Description
HB10	Hydraulic Intensifier



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Description	Weight
H4910A	Pole Puller Assembly	175 lbs.

Pole Puller Assembly

- Heavy-duty construction
- Works in confined areas, next to buildings or out in the open
- Includes proof-certified 6' alloy chains
- Capacity: 56,000 lbs. @ 2,000 psi lift
- Operating pressure: 300-2,800 psi
- Open and closed center system

Breaker Assembly

- Great for breaking sidewalks and curbs or driving ground rod and for other small demolition jobs
- Clean modular design with few protrusions to irritate operators legs
- High blow energy provides maximum breaking power
- Integral rubber damper reduces chisel noise
- Low noise and vibration levels
- AVS Tools have patented spring-dampened handles
- Two-step trigger
- Supplied with 12" steel braided whip hoses
- Open center system

Greenlee #	Length	Weight
HPB55-1AVS	30"	56 lbs.



Greenlee #	Length	Weight
HPB45-1AVS	28.5"	54 lbs.

Breaker Assy, 45 lb. 1-1/8x6 DMP HDL

- Low noise and vibration levels
- Integral rubber damper reduces chisel noise
- Clean modular design with few protrusions to irritate operator's legs
- Two-step trigger
- Supplied with 12" steel braided whip hoses
- Great for breaking sidewalks and curbs or driving ground rod and for other small demolition jobs
- AVS tools have patented spring-dampened handles that reduce vibration transmitted to the operator by 80-90%

Submersible Pump, 275 gpm

- Self-priming, compact, lightweight design with carrying handle
- High impact strainer housing
- Capacity: up to 275 gpm
- Can draw water down to depth of 1-3/4"
- Can run dry without damage
- Operating pressure: 0-2,000 psi
- Pressure port: 9/16-18 SAE O-ring
- Return port: 3/4-16 SAE O-ring
- Open and closed center system

Greenlee #	Discharge Size	Suction Size	Weight
H4665A	2" NPT Female	1-15/16"	9 lbs.
156340	2" Diameter by 25' Assembly	Discharge Hose	



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Discharge Size	Suction Size	Weight
H4660B	2-1/2" NPT Female	1-1/2"	23.5 lbs.
156339	2-1/2" Diameter x 25' Hose Assembly	Discharge	

Submersible Pump, 400 gpm

- Self-priming, high impact strainer housing with carrying handle
- Capacity: up to 400 gpm
- Can be run dry without damage
- Can draw water down to depth of 2"
- Operating pressure: 0-2,000 psi
- Pressure and return ports: 1/2" male NPTF

Trash Pump

- Compact, under 12" diameter to easily fit into small areas
- Self-priming submersible pump can be placed and operated quickly
- Passes up to 3" solids minimizing pump blockage from debris
- Can be run dry without damage for longer working life
- Carry handle with lifting eye
- Includes locking coupler for discharge hose
- Can draw water down to depth of 2-3/4"
- Capacity: up to 500 gpm
- Operating pressure: 0-2,000 psi
- Pressure and return ports: 1/2" male NPTF

Greenlee #	Discharge Size	Suction Size	Weight
H4635	3" NPT Female	3.125"	28.0 lbs.
49499	3" Dia x 25'	Discharge Hose Assembly	
H4670	4" NPT Female	4.0"	59.0 lbs.
154955	4" Dia x 25'	Discharge Hose Assembly	



Huskie #	Weight
R-14EH	75 lbs. With Oil

Single Acting Hydraulic Pump

- 1/2 HP, 10,000 psi
- Remote operation allows full operator control
- Advance and hold feature comes standard
- Manual control directly on pump motor
- Pressure adjustment from 4,000-10,000
- Oil capacity: 2 quarts

EPP10 Electric/Hydraulic Pump

- Small and lightweight
- Factory set relief valve
- Audible recycling of pump to signal completion of crimp cycle
- Sealed electric pendant switch and manual switch
- Quick disconnect hydraulic fitting
- Long, durable life expectancy (100,000+ life cycles)
- Lightweight cast aluminum reservoir body
- Motor: 115V AC/60Hz, 1/2hp @ 3450 rpm
- Weight: 30 lbs.

Burndy #	Description
EPP10	Electric/Hydraulic Pump



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Description
EHP700LU11	Battery-Powered Pump w/120V Charger & Two 18V 3.0Ah Li-Ion Batteries
EHP700LU12	Battery-Powered Pump w/12V Charger & Two 18V 3.0Ah Li-Ion Batteries
EHP700LU22	Battery-Powered Pump w/230V Charger & Two 18V 3.0Ah Li-Ion Batteries
EHP700LU120	Power Pump w/120V Adapter
EHP700LU230	Power Pump w/230V Adapter
EHP700LUB	Bare Tool Only
HTA4GL	Remote Control

EHP700LU Hydraulic Power Pump

- Operates with any 10,000 psi single acting remote heads
- 3-in-1 pressure specific program settings for crimping, cutting and punching
- Dashboard display provides real time monitoring of operation
- On-board and remote rocker switches for pump activation
- Includes shoulder strap and 6' corded magnetic remote
- 2-stage motor
- Weight: 14 lbs.

High Pressure Couplers

- 10,000 psi



Greenlee #	Description
130868	Male Coupler, Nose Half 1/4-18 NPSM
130878	Female Coupler, 1/4-18 NPSM
54169	Female Coupler, Nose Half 1/4-18 NPSM
F024631	Female Coupler, 1/4-18 NPTM
F022061	Male Coupler, Nose Half 3/8-18 NPTF
F021627	Female Coupler. 3/8-18 NPTM

Female Couplers

Greenlee #	Description
3HTM3	3/8" HTMA, External O-Ring Thread
3HTM4	1/2" HTMA, External O-Ring Thread
EC3-21	3/8" NPTF
EC3-26	1/2" NPTF

Male Couplers

Greenlee #	Description
HT3M3	3/8" HTMA, External O-Ring Thread
HT3M4	1/2" HTMA, External O-Ring Thread
EP3-21	3/8" NPTF
EP3-26	1/2" NPTF



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

HID6506 Rotary Impact Hammer Drill

- Adjustable flow control prevents over speeding and allows precise control of drilling speed
- Hammer drill in concrete, brick, rock and other difficult to drill materials
- Drill in wood or steel with auxiliary chuck
- Super spool selector control for use on open and closed center hydraulic systems
- Selector for drill or hammer/drill modes
- Rugged gear motor, reversible
- Built-in slip clutch to guard against over torque
- Depth gauge and auxiliary handle are removable for tight areas
- Length: 12"
- Operating pressure: 1,000-2,000 psi
- Speed: 775-1,100 rpm at 6.5 gpm
- Chuck: SDS plus bit shanks
- Capacity:
 - ❑ Steel, 1/2" hole
 - ❑ Wood, 1-1/16" hole
 - ❑ Concrete, 3/4" hole
 - ❑ Core bits, 3"
- Weight: 9 lbs.



Greenlee #	Description
HID6506	SDS Plus Rotary Impact Drill



35-Ton Hydraulic Steel Punch

- Punches up to 1/2" mild steel
- 13/16" Max hold diameter
- Will punch: oval, round, square and slotted holes
- Custom sizes available
- Operates from a 10,000 psi pump source
- Round, Square, Oblong and Hex Dies available

Huskie #	Weight
SH-370M	28 lbs.



Greenlee #	Description
NR1	Nut Sizes 5/8", 3/4", 13/16", 1"
NR2	Nut Sizes 1-1/8", 1-5/16", 1-1/2"
49782	Adapter for NR1
21111	Adapter for NR2
49314	Adapter 7/16" Hex 1/2" Square Drive Shank



Nut Runners

- Deep well accepts up to 6" excess bolt length
- Includes 7/16" hex quick change adapter
- Slim profile for easy use and storage
- NR1 Diameter: 1-3/4", length with adapter: 9-1/2", length without adapter: 7-3/4"
- NR2 Diameter: 2-3/8", length with adapter: 11", length without adapter: 8-5/8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Description
750	Hydraulic Cutter Only
750H767	Hydraulic Cutter Kit

Hydraulic Cable Cutter & Ram in Storage Box

- Cuts in 7 seconds
- Jaws slide open quickly to save time between cuts
- 11 Ton ram powers cutting jaws
- Jaws are specially hardened and precision-ground to hold sharpness
- Lightweight
- Capacity: 100 kcmil copper or aluminum cable
- Jaw opening 1-15/16"

Hydraulic Control Valves, High Pressure, For Cutters and Crimping Tools

- May be directly connected to the tool or used remotely with hoses
- Compact 4-way, 3-position valve
- 3,000-4,000 psi return line ground dump safety valve
- Controlled advance and built-in hold feature
- Single-acting valve available to use with existing single-acting tools
- High pressure quick-disconnects included, 10,000 psi

Greenlee #	Description
PVA0021	Control Valve for Single-Acting Tool
PVA0022	Control Valve for Double-Acting Tool



Greenlee #	Hose Diameter	Length
138573	3/16" ID	6' Pair
138574	3/16" ID	10' Pair
F020721	3/16" ID	6' Single Hose
F020723	3/16" ID	10' Single Hose

Hose Assembly, High Pressure Set

- Certified non-conductive orange rubber
- For use between Dynapress Intensifier or electric pump and control valve (138573, 138574)
- For use between control valve and tool (F020721, F020723)
- 1/4" NPT Male fitting on one end of high-pressure quick-disconnect on the other end (138573, 138574)
- 1/4" NPT Male fitting on both ends (F020721, F020723)
- Working pressure: 10,000 psi



Hose Assembly, Low Pressure Set

- Certified non-conductive orange rubber
- Double rayon braid
- 3/8" NPTF Male fitting connection
- Working pressure: 2,250 psi

Greenlee #	Hose Diameter	Length
135245	3/8" ID	8'
135247	3/8" ID	10'



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Ratchet Cable Cutter

- Simple, one handed operation
- 2-Speed ratcheting mechanism adjusts for light/heavy cutting
- Well-suited for tight working spaces
- Blades can be opened mid-cycle
- Cushioned grip handle type

Greenlee #	Length	Jaw Size	Cutting
45206	10"	1-7/16"	750 kcmil (AL), 500 (CU)
45207	11"	2"	1000 kcmil (AL), 750 (CU)



ACSR Cable Cutter

- High leverage ratchet mechanism for single-handed cutting of copper and aluminum cables
- Patented two-step ratchet mechanism requires fewer strokes per cut
- Quick release lever opens blades easily in every cutting position
- Precision ratcheting mechanism holds cable tight and allows rapid, straight cuts with minimum effort
- Hardened steel cutting blades for lasting strength and sharpness
- Plastic covered handles with hand guards
- Capacity:
 - 336 MCM ACSR
 - 600 MCM Stranded aluminum and copper
 - 400 MCM Solid copper

Klein Tools #	Description
63607	10-1/4" Ratcheting Cable Cutter



Ratcheting Cable Cutter

- High leverage ratchet mechanism for single-handed cutting of copper and aluminum cables
- Patented two-step ratchet requires fewer strokes per cut
- Quick release lever opens blades easily in every cutting position
- Precision ratcheting mechanism holds cable tight and allows rapid, straight cuts with minimum effort
- Hardened steel cutting blades with hand guards
- Copper maximum cable capacity:
 - 400 MCM (63060)
 - 1000 MCM (63750)
- Aluminum maximum cable capacity:
 - 600 MCM (63060)
 - 1000 MCM (63750)
- Communications cable maximum cable capacity:
 - 1-1/8" (63060)
 - 2-1/16" (63750)



Klein Tools #	Description
63060	10-1/4" Ratcheting Cable Cutter
63750	12-1/8" Ratcheting Cable Cutter

ACSR Ratcheting Cable Cutter

- Cutting inserts are easily replaced by simply removing three screws per blade
- Capacity:
 - 477 MCM ACSR (26/7)
 - 1-1/4" Stranded aluminum and copper
 - 1" Solid copper
 - 1/2" Guy strand
- Tool can be locked when not in use
- High leverage ratcheting mechanism for easier cutting
- Plastic covered handles with hand guards



Klein Tools #	Description
63800ACSR	13-3/4" Ratcheting Cable Cutter



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

CHANCE



Chance #	Description
C4032861	6' Hydraulic Cable Cutter
C4032862	8' Hydraulic Cable Cutter

Insulated Hydraulic Cable Cutters

- For #6 solid copper (0.162" diameter) to 954 kcmil ACSR (1.16" diameter)
- Guillotine-type jaw head
- Operates like a hydraulic jack by simply pumping the handle
- Epoxiglas pole, handle and hydraulic hose
- Hose has minimum burst strength of 12,000 psi
- Pump provides 9,000 psi maximum pressure
- Single control knob selects direction
- Maintenance and operating instructions are included with each tool

HT-TC, Hydraulic Cable Cutters

- Double speed action
- Automatic safety valve to bypass oil
- Pressure release device
- Steel cutting blade
- Cuts:
 - Copper
 - Aldrey
 - Aluminum
 - Aluminum/steel cables and rope
 - Aluminum and steel rods
- HY-TC041 and HT-TC026Y: 180° Rotating head
- HT-TC055: 327° Rotating head

Cembre #	Description	Weight
HT-TC026Y	1" Diameter Max Cut	7.37 lbs.
HT-TC041	1-9/16" Diameter Max Cut	12.76 lbs.
HT-TC055	2-3/16" Diameter Max Cut	18.26 lbs.



Cembre



H.K.Porter®

H.K. Porter #	Length	Weight	Capacity
8690FSK	27-1/2"	3-1/2 lbs.	2"
8613FSK	Cutterhead for 8690FSK		

H.K. Porter Ratchet-Type Soft Cable Cutter

- Jaw keeper prevents jaws from spreading while under heavy load
- Cuts copper and aluminum
- Improved heavy duty jaw design-built for tough conditions
- Ratchet provides up to five times mechanical advantage over manual cutters

Heavy-Duty Ratchet Cable Cutter

- Extra thick blades, ground flat to reduce potential for breakage
- Ratchet action for heavy-duty cutting
- Two cutting actions-fast scissor cutting for small cable and insulation; converts automatically to ratchet mode
- Anti-slip mechanism for positive ratchet action
- Rubber boot protects ratchet mechanism
- Cutting capacity (756):
 - AL & CU: 1500 kcmil
- Cutting capacity (757):
 - ACSR: 954 kcmil
 - Soft steel rod: 1/2"

Greenlee #	Length	Jaw Size	Weight
756	27-1/2"	2"	11.41 lbs.
757	29-1/4"	1.180"	12.22 lbs.
34188	Replacement Cutter Head for 756 (2 blades included)		
34187	Replacement Cutter Head for 757 (2 blades included)		



GREENLEE
A Terson Company



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



H.K. Porter #	Length	Weight	Capacity
8690FH	29-1/4"	10-1/2 lbs.	13/16"
8613FH	Cutterhead for 8690FH		

H.K. Porter Ratchet-Type Hard Cable Cutter

- Jaw keeper prevents jaws from spreading while under heavy load
- Ratchet and chain increase cutting pressure as handles open and close
- Cuts hard cable, ACSR, ACAR, ZEBRA, and self-supporting telephone cable
- Moderate pressure needed to open and close handles

H.K. Porter Compact Ratcheting Cable Cutter

- For cutting soft cable
- Lightweight cutter for confined spaces
- Ratchet-type jaws with shear-cut blades
- Fiberglass handles with non-slip, plastic grips
- Cutter has self-lubricating ratchet and only six moving parts
- Leaves no burrs or sharp edges

H.K. Porter #	Length	Weight	Capacity
6990FS	14"	3-1/2 lbs.	500 MCM CU, 795 AL
6990FSL	19"	3-1/2 lbs.	500 MCM CU, 895 AL
6912FS	Replacement Baldes for 6990FS, FSL		



H.K.Porter®

JennyTOOLS



Jenny Tools #	Length	Description
7116	20"	Ratchet Action Cutters

Ratchet Drive Cutter for Cu/Al

- Patented blade design
- Two handed operation
- Maximum cutting capacity: 2000 MCM Cu
- Maximum insulation diameter: 2.375"
- Cutter blades are field replaceable
- Compact and lightweight
- Weight: 4.5 lbs.

Ratchet Drive Cutters for ACSR

- Heavy duty blade design
- Fiberglass handles with PVC covers and vinyl hand grips
- Smaller and lighter than competitors
- Maximum cutting capacity: 556 MCM ACSR-600 MCM Cu
- Weight: 4.5 lbs.

Jenny Tools #	Length	Description
7118	20"	Ratchet Action Cutters



JennyTOOLS



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Bolt Cutter

- Suitable for cutting hard material
- Short cutting edge for high tensile steel, bolts, wire, rods, chain links, and case hardened chains
- Handles are filled with unicellular foam core

Hastings #	Description	Head Only
10-666	20" Center Cut, 12" Handle	A11012
10-667	24" Center Cut, 16" Handle	A11012
10-767	30" Center Cut, 21" Handle	A11013

Bolt Cutter

- Fiberglass handles have heavy vinyl grips with flat grips ends for 90° cuts
- All-purpose, center-cut jaws for soft, medium and hard metals
- Forged, alloy tool steel jaws are precision ground for sure, efficient cutting and long life
- Lockplate reinforcement prevents jaw bolts from loosening or turning, keeps jaws in correct alignment
- One adjustment realigns cutting edges
- 3-Point toggle joint multiplies 50 lbs. of hard pressure on handles to 4,000 pounds of cutting jaws
- Cutting capacities for hard materials is up to Brinell 400, Rockwell C42
- Cutting capacities for soft and medium materials is up to Brinell 300, Rockwell C31



Klein Tools #	Overall Length	Soft/Med Cap	Hard Cap
63124	24-1/2"	7/16"	5/16"

Heavy-Duty Bolt Cutter with Fiberglass Handles

- Unique cam bolt blade adjustment for easy cutter alignment
- Forged steel blades for a long life
- Clevis-mounted blades for greater strength
- Custom rubber grips for maximum power
- Fiberglass handles are tough and lightweight

Greenlee #	Length	Description/Capacity		
		RB85	RC40	Weight
HDFBC18	18"	5/16"	7/32"	3.4 lbs.
HDFBC24	24"	3/8"	9/32"	10.3 lbs.
11367	Replacement Blade Unit for HDFBC18			
11342	Replacement Blade Unit for HDFBC24			



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



H.K.Porter®

H.K. Porter #	Length	Weight	Capacity
0090MC	18"	3-1/2 lbs.	3/8"
0190MC	24"	5-1/4 lbs.	7/16"
0290MC	30"	8-1/2 lbs.	1/2"
0390MC	36"	12-7/8 lbs.	9/16"

H.K. Porter Center Cut Bolt Cutter, Steel Handles

- Recommended for the most demanding hand cutting applications
- Drop-forged, precision ground, alloy tool steel jaws, center-cut blades
- Cuts soft, medium, or hard materials
- Heavy-duty straps support the jaws
- Lockplate keeps jaws from loosening
- Screw-type adjustment realigns edges
- Tubular steel handles
- Toggle joints turn 50 lb. hand pressure to 4,000 lb. cutting force

H.K. Porter Center Cut Bolt Cutter, Fiberglass Handles

- All-purpose jaws with center-cut blades
- Cuts soft, medium, and hard metals
- Lockplate keeps jaws from loosening
- Screw-type adjustment realigns edges
- Strong, lightweight, fiberglass handles
- Toggle joints turn 50 lb. hand pressure to 4,000 lb. cutting force



H.K. Porter #	Length	Weight	Capacity
0090FC	18-1/4"	3.5 lbs.	3/8"
0190FC	24-1/2"	4.5 lbs.	7/16"
0290FC	30"	7.5 lbs.	3/8"
0390FC	36"	11.5 lbs.	7/16"
0013C	Cutterhead for 0090FC & MC		
0113C	Cutterhead for 0190FC & MC		
0213C	Cutterhead for 0290FC & MC		
0313C	Cutterhead for 0390FC & MC		



H.K.Porter®



H.K.Porter®

H.K. Porter #	Length	Weight	Capacity
8690TN	36"	13 lbs.	3/4"
8613TN	Cutterhead for 8690TN		

H.K. Porter Ratchet-Type Wire Rope Cutter

- Ratchet-type jaws with notched shear-cut blades
- Blades hold and lock material in place
- Cuts aircraft cable, EHS guy strand, wire rope and stainless steel cable
- Cuts all strands with minimal crushing or distortion



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

H.K. Porter Shear-Type Hand Operated Cutter

- Drop-forged, alloy tool steel jaws with shear cut blades
- Cuts copper or aluminum
- Cuts power and communications cable
- Lightweight fiberglass handles for 2-handed control

H.K. Porter #	Length	Weight	Capacity
0290FCS	25"	4-1/2 lbs.	500 MCM CU, 750 AL
0213CSS	Replacement Blades for 0290FCS		
0390FCS	32"	6 lbs.	750 MCM CU, 1200 AL
0313FSS	Replacement Blades for 0390FCS		



H.K.Porter®

Shear Action Cutters with Replaceable Fiberglass Handles

- For use on copper and aluminum
- Blades are heat treated and tempered
- Two handed operation
- Replaceable blades and handles



JennyTools

Jenny Tools #	Length	Cutting Capabilities	Weight
1124	21"	600 MCM Cu/ 600 MCM Al	3.5 lbs.
1132	32"	1000 MCM Cu/ 1200 MCM Al	9 lbs.

Standard Cable Cutter

- Lightweight with strong fiberglass handles with vinyl grips for slip resistance and comfort
- Replaceable hook-jaw blades
- Heavy-duty pins in head serve as blade-stops
- Jaws made from forged tool steel with black-oxide finish which increases life
- Not designed for cutting steel or ACSR
- MCM Cable-Cutting Maximum Capacity: 500 Copper, 750 Aluminum
- Weight: 5.25 lbs.



Klein Tools #	Description
63041	25" Cable Cutter

KLEIN TOOLS

Hastings #	Description
10-072	28-3/4" Cable Slicer
10-070	20-1/2" Cable Slicer
A-11058	Blade Assembly for 10-070
A-11006	Cutter Blade for 10-070 Prior to 2006



HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

H.K.Porter®



H.K. Porter #	Length	Weight	Capacity
8690CK	28"	8-3/4 lbs.	1/2"
8613CK	Cutterhead for 8690CK		

H.K. Porter Ratchet-Type Guy Strand Cutter

- Notched shear-cut blades hold material firmly in place
- Makes clean, square cuts with minimal distortion
- Cuts EHS guy strand, mold steel rods, bolts and similar materials

Insulated Ratchet Cutter

- For cutting ACSR and soft wire conductors
- Overhead or underground
- Interchangeable cutting heads
- Upper roller guide minimizes shaft deflection
- Handle folds to store in 6' canister

Hastings #	Description
11-006	6', with A 11055 ACSR Head
11-008	8', with A 11055 ACSR Head
11-018	8', with A 11056 Soft Wire Cutter Head



BURNDY®



Burndy #	Description
OH25	Dieless Ratchet Tool

OH25 Hytool Dieless Ratchet Tool

- Installs service entrance splice connectors
- Conductor range: #10 through 1/0
- Forged steel jaws and stainless steel indenter
- Ratchet mechanism provides proper uniform crimp
- Spring loaded comfort grip handles
- Maximum handle force: 50 lbs.
- Maximum force developed: 6,000 lbs.

MRC840 Hytool Rotating Die Crimper

- Multiple grip selections on rotatable die wheels
- High strength fasteners
- Plated, heat treated, steel jaws
- Engraved crimp groove (Die index number)
- Comfort grip handles
- Crimping capacity: #8-4/0 AWG Non-insulated copper terminals and splices
- Weight: 8.25 lbs.

Burndy #	Description
MRC840	Mechanical Rotating Crimp Tool

BURNDY®



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Burndy #	Description
MY29-3	Dieless Lever-Type Crimper

MY29 Dieless Lever-Type Hytool Crimper

- Heavy-duty forged steel construction
- Reinforced back and comfort grip handles
- Adjustable nest die with knurled steel knob and machine threads
- Crimping capacity: #8 str-250 kcmil copper commercial (code) cable, 30 navy-250 navy copper navy cable, #8 str-4/0 str aluminum commercial (code) cable
- Weight: 8 lbs.

Hydraulic Dieless Crimper

- Dieless indent style crimping head does not require interchangeable crimping dies
- Flip-open crimping head rotates 350° to get into tight locations
- 2-Speed pump provides rapid crimping cycle time
- Lightweight and strong fiberglass handles
- Includes a molded carrying case
- Capacity:
 - ☐ Copper: 4 AWG-1000 kcmil
 - ☐ Aluminum: 6 AWG-1000 kcmil
- Length: 26"
- Weight: 15 lbs.

Greenlee #	Description
HK12ID	Hydraulic Crimping Tool



Greenlee #	Description
K425K58	Crimping Tool with Kearney O and 5/8" Die Grooves
K425KO	Crimping Tool with Kearney D and O Die Grooves

Manual Crimper

- Designed for crimping a wide range of overhead service entrance connections, overhead splices and overhead taps
- Easy-to-use MD-6 type "pop" tool
- Bent fiberglass handles
- Teflon-impregnated bushings at pivot joints
- Complete crimps are assured with an over-center cam mechanism
- Tool can easily be checked visually for proper adjustment and can be adjusted with Allen wrenches
- Length: 25-3/8"
- Weight: 7.1 lbs.

MD7 Posi-Press Hytool Crimper

- Crimp force: 9,000 lbs.
- Designed for compression of sleeves, lugs and H-frame parallel groove connectors
- Allows use of the complete line of BURNDY "W" and "X" die inserts
- Permanent "D3" die groove
- Ergonomically designed, 1-piece, comfort-grip composite polymer handles
- Butting steel jaws for proper crimps
- Positive lock, spring loaded die retainer buttons
- PTFE Impregnated steel/bronze bushings and stainless steel pins
- Electroless nickel plated jaws and jaw links
- Weight: 6 lbs.

Burndy #	Description
MD7	Permanent "BG" (5/8") and "D3" Grooves; Bent Composite Polymer Handles
MD7-8	Permanent "O" and "D3" Grooves; Bent Composite Polymer Handles



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Burndy #	Description
MD6	Std. MD6 with Permanent "BG" (5/8") and D3 Grooves-Bent Wooden Handles
MD6-4	Std. MD6 Head with "BG" (5/8") and D3 Grooves-24" Straight Fiberglass Handles, Rated at 100KU per Foot for Five Minutes
MD6-6	Snub Nose Head with D3 Groove Only, To Accept "W" Style Dies
MD6-8	Std. MD6-8 Head with Permanent "O" Die and D3 Grooves-Bent Wooden Handles

MD6 Hytool Hand-Operated Crimping Tool

- Crimp force: 9,000 lbs.
- Installs full range of connectors (taps, splices, terminals): #14 through 4/0, in full tension and non-tension applications
- Butting steel jaws for proper crimps
- No additional dies required for "O" and "D3" size tap connectors
- Increased strength and greater bearing area provided with larger steel bolts
- Spring loaded positive lock die retainer buttons
- Over center cam action for full crimp force
- Lightweight high strength aluminum alloy castings
- The "D3" groove accommodates the complete line of type-"W"- die inserts
- Weight: 6 lbs.



Y81KFT HYPRESS Dieless Hand Operated Hydraulic Crimping Tool, 4-POINT

- 6-Ton output force
- Dieless installation, 360° head rotation
- Flip top head design, handle trigger ram release
- Advanced high-speed pump design
- Audible pressure "pop-off" valve and die embossment
- UL Listed and CSA certified with range taking capabilities
- Includes: high-impact formed carrying case
- Crimping capacity:
 - 1000 kcmil Copper
 - 750 kcmil Flex wire
 - 750 kcmil Aluminum
- Weight: 12 lbs.

Burndy #	Description
Y81KFT	Dieless Hand Operated Hydraulic Crimping Tool



Huskie #	Length	Weight
EP-750A	23"	11.5 lbs.

EP-750A: 6.2 Ton Flip-Top Dieless Crimping Tool

- 1.5" Jaw opening
- Rapid advance
- Flip-top head design
- Eliminates need for dies
- Connector Range:
 - #10 AWG-750 MCM



Y750HSXT 750 HYPRESS Hand Operated Hydraulic Tool

- 12-Ton output force
- C-shaped head with 1.65" opening and 355° rotation
- Patented rapid advance pump
- Exposed positive die lock buttons
- Audible "pop-off" pressure relief valve
- Operating pressure: 10,000 psi
- High-impact plastic carrying case
- Uses all standard "U" Series dies
- Weight: 14.5 lbs.

Burndy #	Description
Y750H SXT	Hand Operated Hydraulic Tool



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Huskie #	Length	Weight
EP430	24"	13.5 lbs.

EP-430: 12 Ton Compression Tool with Rubber Boot

- Large 1-3/16" jaw openings
- Able to splice up to 600 MCM using 12-ton "U" type dies
- Output: 12 tons
- Lugs up to 750 MCM
- Two-stage pumping piston for rapid advance
- 180 degrees swivel crimping head permits installations in confined areas
- Accepts all "U" type dies
- Twist handle release mechanism

EP-510C: 12 Ton Compression Tool with Rubber Boot

- 1.65" Jaw opening
- Protective rubber boot on "C" head
- External pressure adjustment
- UL Classified
- Connector Range:
 - ☐ Lugs & Splices: Up to 750 MCM Al and Cu

Huskie #	Length	Weight
EP-510C	25"	16.5 lbs.



Huskie #	Length	Weight
EP-510K	26"	17 lbs.

EP-510K: 12 Ton Compression Tool with Rubber Boot

- 1.5" Jaw opening
- Protective rubber boot on "C" head
- External pressure adjustment
- Connector Range:
 - ☐ Lugs & Splices: Up to 1033 MCM Strand, 47 ACSR



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Ratcheting Cable Cutters

- For stranded and flexible copper and aluminum cable
- Hardened, precision cutting blade for long life
- Locking mechanism for safe transport
- Not for use on steel, aluminum alloy, or hard-drawn copper cables

Cementex #	Size	Capacity
RCC500	10"	Up To 500 MCM or 1.40" Diameter
RCC750	9"	Up To 750 MCM or 1.60" Diameter



Cementex



KLEIN TOOLS

Klein Tools #	Description
63050	9-1/2" Cable Cutter

High Leverage Cable Cutter

- High leverage design for exceptional cutting capability
- Precision, one-hand shearing action
- Cable gripping shear-type jaws
- Perfect for working in confined spaces
- Maximum cable cutting capacity: 4/0 aluminum, 2/0 soft copper, 100-pair 24 AWG communications cable

Phillips Tip Screwdrivers

- Double-insulated Phillips screwdriver
- Insulated shaft and cushion grip handle

Cementex #	Size
P1-3-CG	#1 x 3"
P2-4-CG	#2 x 4"
P2-6-CG	#2 x 6"
P2-8-CG	#2 x 8"



Cementex

Heavy-Duty Round Shank Screwdriver-Insulated Keystone Tip

- Individually tested to exceed standards, 1,000 V-rated
- Tips are precision ground to fit screw openings securely and resist slippage
- Cushion grip handles



KLEIN TOOLS

Klein Tools #	Shank Tip	Shank Length	Overall Length
602-4-INS	1/4"	4"	8-5/16"
602-6-INS	5/16"	6"	10-15/16"
602-10-INS	3/8"	10"	15-7/16"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Round Shank Screwdriver-Insulated Cabinet Tip

- Individually tested to exceed standards, 1,000 V-rated
- Cushion grip handles
- For electrical, telephone, and work in recessed holes and other tight spaces



Klein Tools #	Shank Tip	Shank Length	Overall Length
601-4-INS	3/16"	4"	7-3/4"
601-6-INS	3/16"	6"	9-3/4"

Round Shank Screwdriver-Insulated Phillips Tip

- Individually tested to exceed standards, 1,000 V-rated
- Cushion grip handles
- Tips are profilated to provide a more consistent geometric symmetry than conventional Phillips tip screwdrivers

Klein Tools #	Tip Size	Shank Length	Overall Length
603-3-INS	#1	3"	6-3/4"
603-4-INS	#2	4"	8-5/16"



Cementex #	Size
MC4P-CG	3/16" x 4"
MC6P-CG	3/16" x 6"
M4-CG	1/4" x 4"
M6-CG	1/4" x 6"
M8-CG	1/4" x 8"



Cabinet Tip Screwdrivers

- Double-insulated cabinet tip slotted screwdriver with insulated shaft and cushion grip handle



Cementex #	Description
TR-6SD	6-Piece Cushion Grip Screwdriver Set

6-Piece Screwdriver Roll

- Double-insulated screwdriver set with black tool pouch
- Each insulated screwdriver features a cushion grip handle
- Includes:
 - #1 x 3" Phillips tip screwdriver
 - #2 x 4" Phillips tip screwdriver
 - 3/16" x 4" Cabinet tip screwdriver
 - 3/16" and 1/4" x 6" Cabinet tip screwdriver
 - 5/16" x 6" Mechanic's tip screwdriver



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

7-Piece Cushion Grip Nut Driver Set-3" Shaft

- Full hollow shaft for long bolts or studs, with magnetic tip
- 631 Includes:
 - 3/16" Non-hollow shaft (630-3/16)
 - 1/4" Hollow shaft (630-1/4)
 - 5/16" Hollow shaft (630-5/16)
 - 11/32" Hollow shaft (630-11/32)
 - 3/8" Hollow shaft (630-3/8)
 - 7/16" Hollow shaft (630-7/16)
 - 1/2" Hollow shaft (630-1/2)
- 631M Includes:
 - 3/16" Non-hollow shaft (630-3/16M)
 - 1/4" Hollow shaft (630-1/4M)
 - 5/16" Hollow shaft (630-5/16M)
 - 11/32" Hollow shaft (630-11/32M)
 - 3/8" Hollow shaft (630-3/8M)
 - 7/16" Hollow shaft (630-7/16M)
 - 1/2" Hollow shaft (630-1/2M)
- All items also available individually

Klein Tools #	Description
631	7-Piece Cushion Grip Nut Driver Set
631M	7-Piece Magnetic Tip Cushion Grip Nut Driver Set



Klein Tools #	Description
85076	7-Piece Set

7-Piece Cushion Grip Screwdriver Set

- Includes:
 - 1/4" Square shank, keystone tip (600-4)
 - 5/16" Round shank, keystone tip (602-6)
 - 3/16" Round shank, cabinet tip (601-3)
 - 3/16" Round shank, cabinet tip (601-6)
 - 1/4" Round shank, cabinet tip (605-4)
 - 3" Round shank, No. 1 Phillips tip (603-3)
 - 4" Round shank, No. 2 Phillip tip (603-4)
- All items also available individually



5-Piece Cushion Grip Screwdriver Set

- Includes:
 - 1/4" Square shank, keystone tip (600-4)
 - 3/16" Round shank, cabinet tip (601-6)
 - 5/16" Round shank, keystone tip (602-6)
 - 4" Round shank No. 2 Phillips tip (603-4)
 - 1/4" Round shank, cabinet tip (605-6)
- All items also available individually

Klein Tools #	Description
85075	5-Piece Set



Klein Tools #	Tip Size	Blade Length	Overall Length
602-4DD	1/4"	4"	9"
602-7DD	5/16"	7"	12-3/8"

Demolition Driver-Keystone Tip Screwdriver

- Plated metal strike cap to protect handle from hammer blows
- Heat treated metal shaft runs complete length of handle to metal strike cap to transfer metal strike force



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Heavy-Duty Round Shank Screwdriver-Keystone Tip

- Built to handle the tough jobs with ease
- Hex bolster reinforces shank for hard use and allows wrench assisted turning

Klein Tools #	Tip Size	Shank Length	Overall Length
602-4	1/4"	4"	8-11/32"
602-6	5/16"	6"	10-15/16"
602-8	3/8"	8"	13-7/16"



Klein Tools #	Tip Size	Shank Length	Overall Length
600-4	1/4"	4"	8-11/32"
600-6	5/16"	6"	10-15/16"
600-8	3/8"	8"	13-7/16"

Heavy-Duty Square Shank Screwdriver-Keystone Tip

- Heavy-duty square shank for wrench assisted turning
- Bolster reinforces shank for hard use
- Designed for the most demanding uses

Heavy-Duty Round Shank Screwdriver-Cabinet Tip

- Narrow cabinet tip permits blade access where space is limited

Klein Tools #	Tip Size	Shank Length	Overall Length
605-4	1/4"	4"	8-11/32"
605-6	1/4"	6"	10-11/32"



Klein Tools #	Tip Size	Shank Length	Overall Length
603-3	#1	3"	6-3/4"
603-4	#2	4"	8-5/16"
603-6	#3	6"	11"
603-7	#2	7"	11-5/16"

Round Shank Screwdriver-Profiled Phillips Tip

- Tips are precision-machined to provide a more consistent geometric symmetry than conventional Phillips tip screwdrivers
- Provides accurate fit and torque without slippage

Round Shank Screwdriver-Cabinet Tip

- Narrow cabinet tip permits blade access where space is limited

Klein Tools #	Tip Size	Shank Length	Overall Length
601-4	3/16"	4"	7-3/4"
601-6	3/16"	6"	9-3/4"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Cementex #	Description
TR-8NDXL	8-Piece Cushion Grip Extra Long Nut Driver Kit, 6" Long
TR-8ND	8-Piece Cushion Grip Nut Driver Kit, 3" Long

8-Piece Nut Driver Roll Kit

- Double insulated, cushion grip
- Includes:
 - Black tool pouch
 - 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2" and 9/16"



7-Piece Cushion Grip Nut Driver Set-6" Shaft

- Full hollow shaft for long bolts or studs, with magnetic tip
- 647 Includes:
 - 3/16" Non-hollow shaft (646-3/16)
 - 1/4" Hollow shaft (646-1/4)
 - 5/16" Hollow shaft (646-5/16)
 - 11/32" Hollow shaft (646-11/32)
 - 3/8" Hollow shaft (646-3/8)
 - 7/16" Hollow shaft (646-7/16)
 - 1/2" Hollow shaft (646-1/2)
- 647M Includes:
 - 3/16" Non-hollow shaft (646-3/16M)
 - 1/4" Hollow shaft (646-1/4M)
 - 5/16" Hollow shaft (646-5/16M)
 - 11/32" Hollow shaft (646-11/32M)
 - 3/8" Hollow shaft (646-3/8M)
 - 7/16" Hollow shaft (646-7/16M)
 - 1/2" Hollow Shaft (646-1/2M)
- All items also available individually

Klein Tools #	Description
647	7-Piece Cushion Grip Nut Driver Set
647M	7-Piece Magnetic Tip Cushion Grip Nut Driver Set



Salisbury #	Description
TK9	Basic Electricians Roll, 9 Pieces in Tool Roll
TK30	Deluxe Maintenance Tool Kit, 30 Pieces in Plastic Tool Box
TK30ETK	Electrician's Tool Kit, 30 Pieces in Plastic Tool Box
TK60	Hot Box Tool Kit, 60 Pieces in Plastic Tool Box w/Tool Rolls



TK9



TK30



TK30ETK



TK60

Insulated Hand Tool Kits

- Impact resistant two-color insulating material
- All items also available individually
- Custom kits built to your requirements



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein Tools #	Description
33525	13-Piece Tool Kit



Utility Insulated 13-Piece Tool Kit

- Individually tested to exceed standards, 1,000 V-rated
- Two layers of insulation provide protection against electric shock
- Custom case includes two pallets with custom-fitted pockets for each tool, piano-hinged case cover has both a combination lock and two key-locked latches for security, storage space behind the pallets
- Kit Includes:
 - Side-cutting pliers (D2000-9NE-INS)
 - Diagonal-cutting pliers (D2000-28-INS)
 - Diagonal-cutting pliers, angle head (D2000-48-INS)
 - Heavy-duty long-nose pliers, side-cutting (D203-8-INS)
 - Keystone heavy-duty round shank screwdriver, 1/4" x 4" (602-4-INS)
 - Keystone heavy-duty round shank screwdriver, 5/16" x 6" (602-6-INS)
 - Keystone heavy-duty round shank screwdriver, 3/8" x 10" (602-10-INS)
 - Phillips round shank screwdriver, No. 1 (603-3-INS)
 - Phillips round shank screwdriver, No. 2 (603-4-INS)
 - Phillips round shank screwdriver, No. 3 (603-6-INS)
 - High-leverage cable cutter (63050-INS)
 - Pump pliers (D502-10-INS)
 - Cable/lineman's skinning knife (1570-3LR-INS)
- All items also available individually

Basic Insulated Tool Set, 24 Piece

- Double-insulated
- Includes:
 - 9" Linesman's plier
 - 6" Diagonal cutting plier
 - 6" Needle nose plier
 - 8" Slip join plier
 - 10" Crimping plier
 - 10" Water pump plier
 - 3/16" x 4" Cabinet tip screwdriver
 - 1/4" x 6" Cabinet tip screwdriver
 - 1/4" x 4" Mechanic's tip screwdriver
 - 5/16" x 6" Mechanic's tip screwdriver
 - #1 x 3" Phillips tip screwdriver
 - #2 x 4" Phillips tip screwdriver
 - 3/16", 1/4", 5/16", 3/8", 7/16" and 1/2" Long arm hex wrenches
 - 1/4", 5/16", 3/8", 7/16" and 1/2" 3" Nut driver
 - Carrying case

Cementex #	Description
ITS-24B	Insulated Tool Set



Cementex #	Description
TR-9ELK	Basic Electricians Tool Roll Kit



Basic Electrician's Roll Tool Kit, 9 Piece

- Includes:
 - 9" Linesman's plier (P9SCNE)
 - 7" Needle nose pliers (P7CN)
 - 7" Diagonal pliers (P7D)
 - 9" Wire stripper (WS19)
 - 3/16" x 4" Cabinet tip screwdriver, cushion grip (MC4P-CG)
 - 3/16" x 6" Cabinet tip screwdriver, cushion grip (MC6P-CG)
 - 1/4" x 6" Cabinet tip screwdriver, cushion grip (M6-CG)
 - #1 x 3" Phillips tip screwdriver, cushion grip (P1-3-CG)
 - #2 x 4" Phillips tip screwdriver, cushion grip (P2-4-CG)
 - Black tool pouch



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Combination Knife & Scissors Sharpener

- High grade, tungsten-carbide inserts sharpen both sides of the blade at the same time
- Restores knife edge in three or four strokes
- Built-in finger guard
- Lightweight, compact size
- Sharpens electrician’s scissors, pocket knives, retractable blade utility knives, razor blade knives and serrated knives

Klein Tools #	Description
48036	Knife Sharpener



44004

Klein Tools #	Blade Length	Blade Color
44004	2-3/8"	Silver
44005	2-5/8"	Silver

Lightweight Lockback Pocket Knife-Sheepfoot Blade

- Blades are AUS 8 stainless steel hardened to 58-59 Rc
- Premium quality blade offers superior edge holding
- Impact-resistant nylon resin handle with rubber insert
- Reversible thumb stud provides easy one-handed opening

Lightweight Lockback Pocket Knife-Drop-Point Blade

- Blades are AUS 8 stainless steel hardened to 58-59 Rc
- Premium quality blade offers superior edge holding
- Slim and comfortable silver anodized-aluminum handle for corrosion-resistance (44000)
- Black chrome blade and black anodized-aluminum handle for corrosion-resistance (44000-BLK)
- Impact-resistant nylon resin handle with rubber insert (44002 & 44003)
- Reversible thumb stud provides easy one-handed opening



44000

44001

44000-BLK

44002

Klein Tools #	Blade Length	Blade Color
44000	2-1/4"	Silver
44000-BLK	2-1/4"	Black
44002	2-3/8"	Silver
44003	2-3/4"	Silver
44001	2-1/2"	Silver w/Pocket Clip
44001-BLK	2-1/2"	Black w/Pocket Clip



4001-BLK



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein Tools #	Blade Length	Description
1550-4	2-5/8"	Carbon Steel

1-Blade Pocket Knife-Sheepfoot Slitting Blade

- Extra-large curved sheepfoot slitting blade
- Ideal for heavy-duty line work
- Wood grain plastic handle
- Blade locks open

Folding Utility Knife

- Push button to open and close
- Triple ground blades
- Rubber grips on handle
- Heavy-duty durable construction

Klein Tools #	Closed Length	Overall Length
44131	4-1/8"	4-1/2"



Klein Tools #	Overall Length	Blade Length
44200	6-1/4"	1-3/4"

Cable Splicer's Knife

- Special purpose short blade with comfortable, full-sized, heavy-duty handle
- Coping-type blade made of the finest cutlery steel, tough and carefully tempered to hold its edge
- Handle is textured for comfort and firm grip
- Hang hole for easy storage and portability

Cable/Lineman's Skinning Knife

- Blade withstands frequent scoring and slitting of cable jacket
- Blade and ring are securely molded in handle
- Notch on blade back for scraping or removing wire insulation
- Comfortable textured handle with finger grooves and guard
- No contact between stainless steel ring and hardened steel blade
- Rectangle-shaped handle design for attachment to some utility hot stick equipment
- 8" Overall length less ring

Klein Tools #	Blade Length
1570-3	3"



Klein Tools #	Blade Length
1580-3	2"

Klein Kurve Skinning Knife

- 2" Blade for increased control when scoring and slitting cable jacket
- Ergonomic handle
- Oversized ring for strength and easy storage
- Notch on blade back for scraping or removing wire insulation
- 8-3/4" Overall length

Insulated Lineman's Skinning Knife

- Clearly marked with 1,000 V-rating symbol
- Two-layer insulation
- Molded measuring marks on back of handle
- Large molded handle
- Tough, tempered steel blade provides maximum sharpness and durability to withstand frequent cable scoring
- 8-3/4" Overall length

Klein Tools #	Blade Length
1571INS	2-3/8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Madi #	Description
BB-1	BrushBlade Lineman's Knife
WB-1	Wire Brush Replacement

BrushBlade The Lineman's Knife

- Maximum versatility and safety
- Integrated replaceable wire brush for cleaning conductors to make better connections
- Brushes up to 1,000 MCM conductor
- Blade locks in open position and can be closed when not in use
- Blunt tip blade
- Reversible thumb stud for quick one handed opening from left or the right
- Built-in snap ring

Drop Point Pocket Knife

- Stainless steel blade for extra durability and corrosion resistance
- Premium finish desert ironwood handle contoured for comfortable hand fit
- Belt clip for added convenience
- Lock-back for increased safety
- Blade 2.25", handle 3.5"

Greenlee #	Description
UT652-24	Drop Point Folding Knife



Greenlee #	Description
UT652-25	Drop Point Folding Knife

Titanium Coated Drop Point Pocket Knife

- Titanium coated stainless steel blade for premium durability and corrosion resistance
- 40 PCT Serrated edge for tough cutting jobs
- Aircraft grade aluminum handle to endure extra rough handling
- Ambidextrous thumb-stud and reversible belt clip for added convenience
- Lock-back for increased safety
- Blade 2.25", handle 3.5"

Hawkbill Pocket Knife

- Stainless steel blade for extra durability and corrosion resistance
- Premium finish rosewood handle contoured for comfortable hand fit
- Belt clip for added convenience
- Lock-back for increased safety
- Blade 2.83", handle 4"

Greenlee #	Description
UT652-28	Hawkbill Folding Knife



Buckingham #	Description
70902	With Blunt Point and Accessory Ring
7090	With Standard Blade and Accessory Ring

Skinning Knife with Ergonomic Handle

- Popular choice
- Durable blade stays sharp



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Splicer Skinning Knife

- Straight style blade is molded into and easy-grip polymer handle that remains pliable in subzero temperatures
- Blade is heat treated then ice tempered for a long-lasting edge and is 20-25% thicker than comparable models

Jameson #	Description
32-24P	Skinning Knife & Leather Pouch Combo
32-24J	Skinning Knife
32-25	Leather Pouch



Klein Tools #	Blade Length	Overall Length
702-12	12"	16-1/4"

High-Tension Hacksaw

- Adjustable blade tension up to 30,000 psi for fast, precise cuts
- Soft-touch grips
- Alternative 45° degree mounting for flush cutting
- Front-mount for reciprocating saw blades
- Blade storage in handle
- Includes 12" x 24 TPI bi-metal hacksaw blade and 6" x 24 TPI bi-metal reciprocating saw blade

Golden Tri-Cut Blade

- High-speed steel teeth fused to carbon-steel body
- Withstands greater saw tension for less blade flexing
- Fits 12" hacksaw blades
- Golden finish

Klein Tools #	Blade Length	TPI	PKG
1200B1-P	12"	32, 24, 18	10
1232BI	12"	32	1



Chance #	Description
C4032213	Pruning Saw

Pruning Saw

- Black Teflon coating on file-toothed blade for smooth, non-stick action
- Can be used with Chance pistol-grip handle, tree trimmers, universal or telescoping tools

Pole Saw Kit

- Center blade mount (PS-3FP)
- Mounting pin allows easy blade replacement without tools
- Includes pole adapter
- Blade is hard-chrome plated with impulse hardened teeth (Barracuda, SB-16TE)

Jameson #	Description
PS-3FPS2	Pole Saw Head, Adapter & 16" Tri-Cut Blade



Jameson #	Description
SB-5U	16" Saw Blade, Teflon Coated w/Universal Adapter

Conventional Saw Blade

- Teflon coated
- Fits PS-3 and PH-11 pruner




Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Jameson #	Description
SB-13TE	13" Tri-Cut Saw Blade
SB-16TE	16" Tri-Cut Saw Blade
SB-13TEU	13" Tri-Cut Saw Blade with SB-UC Adapter
SB-16TEU	16" Tri-Cut Saw Blade with SB-UC Adapter
SBL-2	Leather Pole Saw Scabbard for 13" & 16" Saw Blades
24-03F	Long Reach Chainsaw Holder w/Locking Straps & Handle (Fits Greenlee Long Reach Chain Saw 32" x 5")
SB-UC	Saw Blade Adapter (Adapts Blade to Any Universal Hot-Stick)

Barracuda Tri-Cut Saw Blade and Accessories

- Hard-chrome plated with impulse hardened teeth
- Tri-cut blades provide a quicker, cleaner cut with less wear on the blade than traditional blades

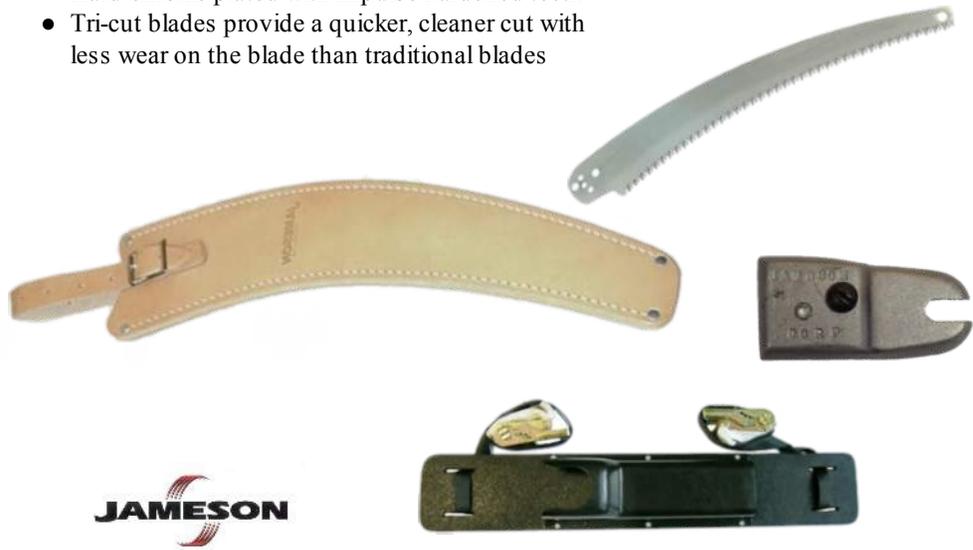

Jameson #	Description
FG-6	6' Extension Pole, M/F End Fittings
FG-6F	6' Base Pole, F/F End Fittings & Base Cap
FG-6M	6' Head Pole, M Fitting and Eye Bolt for Pruner Rope
FG-6BM	6' Top Pole, M Fitting and Blank End

FG Series Hollow Core Pole

- 1.25" Pole diameter
- .125" Wall thickness, hollow core
- Aluminum heavy duty ferrules with external leaf spring locking button
- Batch tested to 1,000KV per foot for five minutes



Five Key Hex Set


- Two key positions (straight-out or right angle) for extra leverage
- Hex ends are square-cut for a secure full depth fit and maximum contact with the hex socket to prevent slippage and stripping of the socket

Klein Tools #	Description
70579	5-1/4" Handle Length, Sizes: 3/16", 7/32", 1/4", 5/16", 3/8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

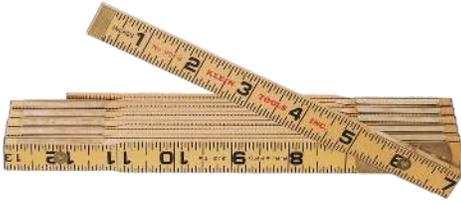

Klein Tools #	Reading	Length
901-6	Outside	6'


Wood Folding Ruler

- Strong, 6' long hardwood rules with clear abrasion resistant coating
- Black markings on yellow, with red stud center markings every 16"
- Measurements are marked on both sides and both edges, graduated to 1/16"
- Riveted lock joints are designed for long wear and maintained accuracy
- Engraved graduations on both sides

Fiberglass Folding Ruler

- Constructed of tough nylon, reinforced with glass fibers for added durability, and resistance to weather, abrasion and most chemicals
- Positive locking joints and stainless steel spring hinges for added strength
- Measurements are marked on both sides and both edges, graduated to 1/16"
- Black markings on yellow, with red stud center markings every 16"
- Engraved graduations on both sides

Klein Tools #	Reading	Length
910-6	Inside	6'
911-6	Outside	6'

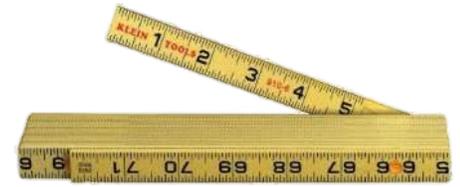

93125



Klein Tools #	Length	Hook
93125	25'	Single
93225	25'	Double
93430	30'	Double

Magnetic Tape Measure

- Nylon-coated hardened steel blade resists abrasion and wear for long life
- Built-in shock absorber to protect blade tip
- True zero feature for accurate inside and outside measuring
- Durable steel belt clip
- Multi-riveted end hook with bottom blade protector reinforces the blade tip and provides maximum pull out strength
- Rare earth magnetic single end hook
- First 11" has oversized, bold numbers
- Easy read fractional scale
- Horizontal and vertical standout for easy one person measurements
- Double sided rule for measurement while using against wall, ceiling or conduit
- Shock and impact resistant case



93225

93430

Pole Punch

- Ergonomic handle with overstrike protection
- Thermoplastic handle withstands harsh conditions and is resistant to oil and grease
- Large strike plate transfers force directly into the hardware, reducing vibration
- Chamfered tip assists centering and reduces drag
- 18" overall length, 12" punch length

Klein Tools #	Description
66326	3/8" Pole Punch



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein Tools #	Head Weight	Length
809-36MF	36 oz.	14"

Lineman's Milled-Face Hammer

- One milled-faced for driving staples used in pole-line work and common, unhardened nails
- Other face is smooth for driving heavier duty hardware
- Rugged and well-balanced, with the weight to drive lag bolts
- Forged, tempered-steel head is only 3-3/4" long for use in tight areas

Lineman's Straight-Claw Hammer

- Heavy-duty, double-duty hammer drives lags and pulls big nails
- Special high-carbon steel head with solid, octagon-shaped driving end and thick, strong claw
- Straight grain hickory handle, lacquered

Klein Tools #	Head Weight	Length
832-32	32 oz.	15"



Klein Tools #	Head Weight	Length
809-36	36 oz.	14"

Lineman's Double-Face Hammer

- Designed for pole line work
- Rugged and well balanced, with the weight to drive lag bolts
- Forged, tempered-steel head is only 3-3/4" long for use in tight areas
- Identical faces with 1-3/4" round crown driving surface and beveled edges

Straight-Claw Hammer-Heavy-Duty

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or over-struck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Perforated neoprene grip bonded to handle
- Straight-claw design for easy nail pulling in tight quarters

Klein Tools #	Head Weight	Length
808-16	16 oz.	13"



Cementex #	Size
P9SCNE	9"

New England Style Linesman's Pliers

- Double-insulated lineman's pliers
- Features New England styled head for easier access to tight areas
- Cutting edges are induction hardened for extended life and high visibility
- Ergonomic comfort grip handles have slip guards

Cementex



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Diagonal Pliers

- Double-insulated diagonal cutting pliers
- Heavy-duty insulated pliers is designed for gripping and cutting thicker gauge wire
- Induction hardened cutting edges for long life and high visibility ergonomic comfort grip handles with slip grip

Cementex #	Size
P7D	7"



Cementex



Klein Tools #	Overall Length	Jaw Length	Jaw Width
D213-9NE-CR-INS	9-5/8"	1-19/32"	1-5/16"

NE-Type Insulated Side-Cutting Pliers-Connector Crimping

- Individually tested to exceed standards, 1,000 V-rated
- Crimping die behind hinge for superior leverage



NE-Type Insulated Side-Cutting Pliers

- Individually tested to exceed standards, 1,000 V-rated
- High leverage design provides 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws

Klein Tools #	Overall Length	Jaw Length	Jaw Width
D213-9NE-INS	9-5/8"	1-19/32"	1-5/16"



Klein Tools #	Overall Length	Jaw Length	Jaw Width
D2000-9NE-INS	9-5/8"	1-19/32"	1-5/16"

NE-Type 2000 Series Insulated Side-Cutting Pliers

- Individually tested to exceed standards, 1,000 V-rated
- Provides 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws
- Heavy-duty cutting knives
- Cuts ACSR, screws, nails and most hardened wire



Insulated Crimping/Cutting Tool

- Individually tested to exceed standards, 1,000 V-rated
- Insulated crimping tool with tapered nose designed for working in confined spaces
- Crimping dies marked for insulated and non-insulated solderless terminals and connectors
- Accommodates wire from 10 to 22 AWG
- Wire cutter in nose

Klein Tools #	Description
1005-INS	9-3/4" Insulated Crimping/Cutting Tool



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein Tools #	Description
1010	8-1/4" Wire Stripper

Long-Nose Multi-Purpose Tool

- Easily cuts and strips wire
- Narrow, serrated pliers nose to pull, loop and bend wire
- Long, curved cutting blade
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals
- Cleanly shears bolts
- Plastic covered cushioned handles
- Bolt sizes: 4-40, 5-40, 6-32, 8-32, 10-32, 10-24
- Strips and cuts 10 to 22 AWG

Journeyman Crimping/Cutting Tool-Non-Insulated/Insulated Terminals

- Designed to crimp insulated and non-insulated 10 to 22 AWG solderless terminals and connectors
- Tapered nose design
- Contoured thumb area
- Specially hardened cutter
- Hot-riveted joint

Klein Tools #	Description
J1005	9-3/4" Crimping/Cutting Tool



Klein Tools #	Description
1005	9-3/4" Crimping/Cutting Tool

Crimping/Cutting Tool-Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors
- Tapered nose design
- Specially hardened wire cutter in nose
- Hot-riveted joint
- Crimps 10 to 22 AWG

Pump Pliers

- Secure tongue and groove design for non-slip grip
- Wide range of versatile jaw positions
- Plastic-dipped handles

Klein Tools #	Overall Length	Max Jaw Cap
D502-6	6-1/2"	7/8"
D502-10	10"	1-3/4"



Klein Tools #	Overall Length	Jaw Length	Jaw Width
J2000-9NETP	9-1/2"	1-19/32"	1-1/4"

NE-Type Journeyman 2000 Series Side-Cutting Pliers-Fish Tape Pulling

- Pulls 1/8" or 1/4" flat steel fish tape without damaging the tape
- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws
- Heavy-duty cutting knives
- Cuts ACSR, screws, nails and most hardened wire
- Dual material handles



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

NE-Type 2000 Series Side-Cutting

Pliers-Lineman's Bolt-Thread Holding

- Hinge opening holds and cleans 5/8" pole line and hardware bolts or threaded rods
- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with rounded nose and sure-gripping, cross-hatched knurled jaw
- Heavy-duty cutting knives
- Cuts ACSR, screws, nails and most hardened wire
- Plastic-dipped handles

Klein Tools #	Overall Length	Jaw Length	Jaw Width
D2000-9NETH	9-3/8"	1-19/32"	1-1/4"



D2000-9NE



HD2000-9NE



J2000-9NE

Klein Tools #	Overall Length	Jaw Length	Jaw Width
D2000-9NE	9-3/8"	1-19/32"	1-1/4"
HD2000-9NE	9-1/2"	1-19/32"	1-1/4"
J2000-9NE	9-1/2"	1-19/32"	1-1/4"



NE-Type 2000 Series Side-Cutting Pliers-Heavy-Duty Cutting

- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws
- Cuts ACSR, screws, nails and most hardened wire
- Plastic-dipped handles (D2000-9NE)
- Heavy-duty, oversized plastic-dipped handles (HD2000-9NE)
- Dual material handles (J2000-9NE)

NE-Type 2000 Series Side-Cutting

Pliers-Connector Crimping

- Crimping die behind hinge for superior leverage crimping
- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws
- Heavy-duty cutting knives
- Cuts ACSR, screws, nails and most hardened wire
- Plastic-dipped handles (D2000-9NECR)
- Dual material handles (J2000-9NECR)

Klein Tools #	Overall Length	Jaw Length	Jaw Width
D2000-9NECR	9-3/8"	1-19/32"	1-1/4"
J2000-9NECR	9-1/2"	1-19/32"	1-1/4"



Klein Tools #	Overall Length	Jaw Length	Jaw Width
D213-9NETH	9-3/8"	1-19/32"	1-1/4"

NE-Type Side-Cutting Pliers-Lineman's Bolt-Thread Holding

- Hinge opening holds and cleans 5/8" pole line and hardware bolts or threaded rods
- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with rounded nose and sure-gripping, cross-hatched knurled jaw
- Plastic-dipped handles



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

NE-Type Side-Cutting Pliers

- Rivet is closer to the cutting edge for 46% greater cutting and gripping power
- Streamlined design with sure-gripping, cross-hatched knurled jaws
- Plastic-dipped handles (D213-9NE)
- Heavy-duty, oversized plastic-dipped handles (HD213-9NE)

Klein Tools #	Overall Length	Jaw Length	Jaw Width
D213-9NE	9-3/8"	1-19/32"	1-1/4"
HD213-9NE	9-1/2"	1-19/32"	1-1/4"



D213-9NE HD213-9NE



Klein Tools #	Description
65508	20-Piece 3/8" Drive Socket Wrench Set

20-Piece 3/8" Drive Socket Wrench Set

- Includes:
 - ❑ Four 6-Point sockets: 3/8", 7/16", 1/2" and 9/16"
 - ❑ Five 12-Point sockets: 5/8", 11/16", 3/4", 13/16" and 7/8"
 - ❑ Eight 6-Point deep sockets: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" and 13/16"
 - ❑ Two extensions: 1-3/4" and 3" long
 - ❑ One ratchet
 - ❑ Hinged metal box

8-Piece Open End Wrench Set

- Double-insulated open end wrench set
- Ideal for use around energized bus bars, back-up batteries and in power systems
- Includes:
 - ❑ Black tool pouch
 - ❑ 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" and 13/16"

Cementex #	Description
IOEWS-8	8-Piece Open End Wrench Set



Cementex #	Description
IGRBWS-11	11-Piece, Ratcheting Box Wrench Set

11-Piece Ratcheting Box Wrench Set

- Double-insulated geared box wrench set
- Set contains eleven 5" long ratcheting geared box end wrenches ranging in size from 3/8" to 1"
- High-visibility orange handle with cushion grip
- Includes:
 - ❑ Black tool pouch
 - ❑ 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1"




Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

14-Piece Long Arm Hex Wrench Set

- Double-insulated hex wrenches
- Made of high-torque steel and feature an insulated high-visibility orange handle with cushion grip
- Includes:
 - ❑ Black tool pouch
 - ❑ 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8", 7/16", 1/2"

Cementex #	Description
HWS-14L	14-Piece Open End Wrench Set

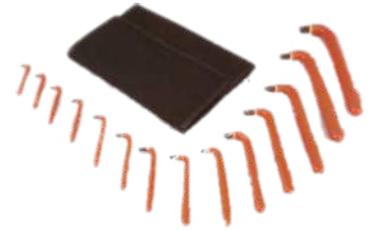

Cementex



Klein Tools #	Description
65514	8-Piece 1/2" Drive, Deep Socket Set Plus Metal Box

8-Piece 1/2" Drive Deep Socket Wrench Set

- Eight 12-Point deep sockets: 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" and 15/16"
- Hinged metal box



Individual items are also available for all CEMENTEX KITS shown. All tools feature two-coat orange over yellow double insulation for added safety verification and are 1,000V-Rated

T-Handle Hex Wrenches

- Double-insulated hex wrench
- Made of high-torque steel and features a six inch insulated high-visibility orange handle with cushion grip




Cementex

Cementex #	Size
IHK-316	3/16" X 6"
IHK-140	1/4" X 6"
IHK-516	5/16" X 6"
IHK-380	3/8" X 6"
IHK-120	1/2" X 6"
IHK-716	7/16" X 6"
IHK-916	9/16" X 6"

T-Handle Socket Wrench

- For fast and easy installation/extraction of bolted lugs and electrical connections
- Provides convenience of a nut driver with much higher torque capability

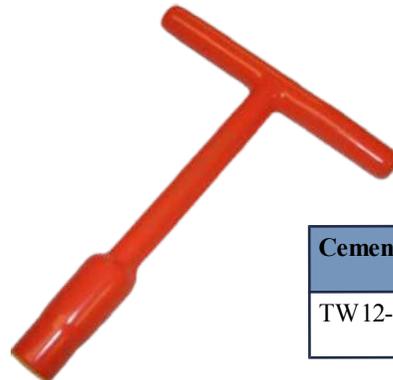

Cementex

Cementex #	Size
TW 12-16L	1/2" x 12"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

3/8" Square Drive Socket Sets

- Double-insulated
- 12-Point socket
- Individual IS38 standard and IS38L deep wall sockets also available
- Includes:
 - ❑ Black tool pouch
 - ❑ 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", and 13/16" 12-Point deep wall sockets
 - ❑ 3" and 6" Extension bars
 - ❑ 3/8" Square drive lever control reversible ratchet

Cementex #	Description
ISS38-11L	Deep Wall Socket Set
ISS38-11	Standard Socket Set



Cementex



KLEIN TOOLS

Klein Tools #	Description
NRHD	Distribution Impact Socket
NRHDA	Replacement Socket Adapter

Distribution Impact Socket

- Includes 3/4", 13/16", 1" and 1-1/8" square sizes (3/4" also works on 13/16")
- 7/16" Hex quick change adapter included
- Improved ball detent on socket adapter
- 13/16" Diameter, 6" long hollow shaft allows use on long threaded bolts

Adjustable Wrenches-Extra Capacity

- Extra capacity allows use of a similar size wrench to handle bigger jobs, especially in confined spaces
- Forged heat-treated alloy steel for maximum strength and lightweight
- High polish chrome finish

Klein Tools #	Length	Capacity	Handle
507-8	8-1/4"	1-1/8"	Plain
507-10	10-1/4"	1-5/16"	Plain
507-12	12-1/4"	1-1/2"	Plain
D507-8	8-3/8"	1-1/8"	Dipped
D507-10	10-3/8"	1-5/16"	Dipped
D507-12	12-3/8"	1-1/2"	Dipped



507-8



D507-8

KLEIN TOOLS



KLEIN TOOLS

Klein Tools #	Description
68222	7-Piece Set

7-Piece Ratcheting Box Wrench Set

- Set of the ratcheting box wrenches in vinyl roll-up pouch
- 12-Point
- Includes:
 - ❑ 1/4" x 5/16" (68200)
 - ❑ 3/8" x 7/16" (68201)
 - ❑ 1/2" x 9/16" (68202)
 - ❑ 5/8" x 11/16" (68203)
 - ❑ 5/8" x 3/4" (68204)
 - ❑ 11/16" x 3/4" (68205)
 - ❑ 13/16" x 7/8" (68206)
- All items also available individually



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Ratcheting Box Wrench

- Both ends are offset 25°
- Different size at each end
- Laminated construction
- Reverse ratcheting action by turning wrench over
- Chrome-plated finish
- 12-Point

Klein Tools #	Size	Length
68202	1/2" x 9/16"	6-7/8"
68203	5/8" x 11/16"	8-1/4"
68204	5/8" x 3/4"	8-1/4"



Klein Tools #	Description
KT223X4-INS	9" Lineman's Insulating 4-in-1 Box Wrench

Lineman's Insulating 4-in-1 Box Wrench

- "See-through" insulating handle confirms metal ends are not connected
- 12-Point sockets
- Reverse ratcheting action by reversing switches on each end of the wrench
- Textured grooves in handle prevent slipping
- Chrome-plated finish resists corrosion

Ratcheting Lineman's Wrench

- Reversible, ratcheting with bolt-through design that allows bolts to pass through the socket
- Combination square socket for most common utility hardware, 3/4" & 1" x 1-1/8" square nut size
- Bright yellow socket for easy visibility
- Works on most common utility pole hardware such as lag bolts, "C" clamps and suspension bolts, 1/2", 5/8", 3/4" bolt size

Klein Tools #	Description
KT151T	13" Ratcheting Lineman's Wrench



Klein Tools #	Description
KT155T	9" Lineman's Wrench
KT155HD	12" Heavy-Duty Design

5-in-1 Lineman's Wrench

- Reversible, ratcheting with bolt-through design that allows bolts to pass through the socket
- Combination square socket for most common utility hardware, 3/4" & 1" x 1-1/8" square nut size
- Bright yellow socket for easy visibility
- Works on most common utility pole hardware such as lag bolts, "C" clamps and suspension bolts, 1/2", 5/8", 3/4" bolt size
- Offers two popular wrench sizes: 9/16" and 3/4"



Lineman's Wrench

- Forged from special bar steel and heat-treated for long life
- Each end has two different size openings
- Hole is provided at larger end for turning-in standard pole steps
- For use on heavy three-bolt guy clamps on which clearance is limited
- For 5/8" hardware, large end has 29/32" and 1-3/32" openings, small end has 5/8" and 13/16" openings

Klein Tools #	Description
3146	13" Lineman's Wrench



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Lowell #	Description
53	20" Handle, for 1-5/16", 1-1/2" Sq Sockets and 1-1/2" Hex

Lineman's Double Square Transmission Wrench

- Cast iron
- Two square sizes in one permanent socket; 1-5/16" and 1-1/2"
- Combination socket also turns 1-1/2" hex nuts
- Reversing control in head
- Enclosed ratchet mechanism
- Bolt-Thru design

Lineman's Triple Square Double End Wrench

- Combine flexibility and reliability
- Ratcheting socket at one end and a ratcheting box at the other
- Socket is made of cast-iron
- Rugged, fabricated steel handles
- Bolt-thru design
- Control lever in head

Lowell #	Description
103TDE	12" Handle, for 3/4", 1" and 1-1/8" Triple Square with 9/16" & 3/4" Hex on Opposite End
101TDE	9" Handle, for 3/4", 1" and 1-1/8" Triple Square with 9/16" & 3/4" Hex on Opposite End



Lowell #	Description
150T	10" Handle, for 3/4", 1" and 1-1/8" Sq
151T	12" Handle, for 3/4", 1" and 1-1/8" Sq.

Lineman's Triple Square Wrench

- Fabricated steel handle
- Lineman's socket wrench
- Fluorescent orange, cast iron sockets
- Three square sizes in one permanent socket: 3/4", 1", 1-1/8"
- Reversing control on side of head
- Semi-Enclosed ratchet mechanism
- Bolt-thru design
- Fits in most common holsters

Overhead Lineman's Wrench

- 3/4", 1" and 1-1/8" Square sockets on one end with two-sided 12-point 3/4" and 9/16" ratcheting box wrench on the other end
- Open center for bolt to pass through
- Large reversing lever

Speed Systems #	Description
OHW	Ratcheting Box Wrench for Overhead Hardware Applications



Speed Systems #	Description
RBW-12916	1/2" x 9/16"
RBW-91634	9/16" x 3/4"
RBW-5834	5/8" x 3/4"
RBW-3478	3/4" x 7/8"

Quad "Dogbone" Ratcheting Box Wrench

- 12-Point ratcheting box wrench
- Thick-walled plastic ergonomic handle with center isolation hole
- Rated 1,000V
- Other sizes and configurations not shown available



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

RAUCKMAN™
Utility Products

The BugWrench handle is formulated of high strength and high dielectric polymer. All BugWrench tools equipped with the high dielectric handle include the following features: A see-through port in the center of the handle to confirm that the two ends are not electrically connected tool metal-to-metal electrical isolation superior to others pull-apart strength greater than others indicator ribs for improved safety (1,000V-Rated) high visibility yellow color. The unique patent-pending design and manufacturing process ensures maximum metal-to-metal separation, with unmatched mechanical strength. A complete line of BugWrenches are available. Call for options and sizes.



Rauckman #	Description
BW-251	3/8" Penta Socket Ratchet, 5/16" Allen Hex
BW-252	3/8" Penta Socket Ratchet, 3/8" Allen Hex

Penta Socket BugWrench

- For working on pad-mount transformers and secondary pedestals
- Penta sockets combined with hex (Allen) wrenches
- High-visibility yellow
- Heavy-duty forged steel head
- Ratchet penta fitting with built-in 3/8" hex socket for "Twist-Off" equipment locks
- 2" Working length of hex wrenches for transformer bars with covers



RAUCKMAN™
Utility Products

4-in-1 Bug Wrench

- High visibility yellow handle (insulated versions)
- Heavy-duty forged head construction
- 1/2" and 9/16" on one end and 5/8" and 3/4" on the other
- Most common sizes on T&D apparatus and connectors

Rauckman #	Description
BW-244	Insulated 4-in-1 HD Ratchet
BW-044	All Metal 4-in-1 HD Ratchet



RAUCKMAN™
Utility Products



RAUCKMAN™
Utility Products

Rauckman #	Description
BW-223HD	3/4" x 9/16" Heavy Duty BugWrench

BugWrench

- For installing or performing maintenance on overhead transformers
- 3/4" and 9/16" Combination ratchet wrench
- Heavy-duty forged fittings

Ratcheting Box Wrench with Hex Shaft

- For use on secondary set screw bar connectors
- Thick-walled plastic ergonomic handle
- Rated 1,000V

Speed Systems #	Description
RBW-1	5/16" Hex Shaft Extended 1-1/2" One Side
RBW-2	5/16" Hex Shaft Extended 1-1/2" Each Side
RBW-38H	3/8" Hex Shaft Extended 1-1/2" One Side



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Madi #	Description
PSD-1	Penta Driver Penta Socket Driver

Penta Driver Penta Socket Driver

- Includes removable drill adapter
- Speed Sleeve spins freely to open transformers and switch gears two times faster



Tri-Penta Wrench

- 3/8" Screwdriver for opening the primary door on 3-phase transformers
- Speed Sleeve spins freely to open transformers and switch gears two times faster
- Built-in design for lifting hand hole lids
- Heat-treated alloy steel
- Penta wrench designed for opening all transformers and switch gears
- Now with removable socket for use with different sizes

Madi #	Description
TP-1	Tri-Penta Wrench

Cementex #	Drive
IR38-LC	3/8" Drive
IR12-LC	1/2" Drive
IB38-3	3" Extension for 3/8" Drive
IB38-6	6" Extension for 3/8" Drive
IB38-12	12" Extension for 3/8" Drive

Square Drive Lever Control Ratchet

- Double-insulated ratchet wrench is reversible
- Has lever control and features an audible click and feel impulse
- Measures 7-1/4" in length and is high-visibility orange in color



Residential



Commercial/Industrial



Rauckman #	Description
M-001	Amber, Residential for Single-Phase Meter
M-002A	Orange, Commercial/Industrial for Ply-Phase Meters
M-009	Meter Puller Storage Bag

MeterPuller

- Works with all known meters and sockets
- Release levers
- Solid hand barrier
- High strength handle
- Chrome plated steel engagement clips
- Vent holes to divert gasses
- Optional storage bag available

Impulse Stapler

- Cordless, internal gas operated staple gun
- Paslode Frame Fuel
- Fully charged between trigger pulls in only seconds
- No set-up required

Paslode #	Description
ST315i	Cordless Impulse Stapler



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Buckingham #	Description
574	Holds 12 Staples

Staple Stick

- Slots are 3/4”L x 1/8”W
- Overall dimensions: 7/8” x 3/4” x 14-1/4”
- Diameter of the hole to hold the stick is 1/2”

RK194-2 Wiremike

- For measuring ACSR, stranded and solid conductors, IPS tubing, rigid and thinwall conduit, and inside and outside dimensions of tubing and pipe sizes
- Stainless steel construction
- Ruler included

Burndy #	Description
RK194-2	Wiremike with Ruler



DogBone and FlatRound Wire Brushes

- Integrated replaceable wire brushes for cleaning conductors to make better connections
- Brushes up to 1590 MCM conductor-FlatRound has a flat profile for hard to brush places
- Use one end for aluminum and the other one for copper
- Durable, lightweight and convenient to carry on climbing belts
- Non-conductive and brushes are not exposed
- Built-in snap ring
- Wire brushes are easily replaceable



Madi #	Description
DBWB-1	DogBone Wire Brush
FRWB-1	FlatRound Wire Brush
LWB-1	Large Wire Brush Replacement



Ratcheting Socket/Ratcheting Penta Wrench

- Thick walled plastic ergonomic handle with center isolation hole
- Rated 1,000V
- Other sizes and configurations not shown available

Speed Systems #	Description
RBW-34SRP	3/4” Socket with Penta Socket (Opposed)



Speed Systems	Description
PHS-2	1/2” Drive, 3/4” Hex Socket

Penta/Hex Security Wrench Socket

- Penta/Hex combination sockets
- Penta and hex socket combined into one socket with common drive
- Reversible when used with socket extension

Ratcheting Box Wrench with Hex Shaft, Fixed Penta

- For use on power transformers
- Thick-walled plastic ergonomic handle with center isolation hole
- Rated 1,000V
- Penta on handle

Speed Systems #	Description
RBW-1P	5/16” Hex Shaft Extended 1-1/2” One Side
RBW-2P	5/16” Hex Shaft Extended 1-1/2” Each Side
RBW-3P	5/16” Hex Shaft on One Side, 3/8” Hex Shaft on Other Side, Both 1-1/2” Long



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Hastings #	Description
3413	6", Std Safety Hook
3414-1	12", Hot Stick Operated Safety Latch

Strap Hoist Isolating Link

- Provides extra protection when used with strap hoists on primary voltages
- Fiberglass link helps to overcome the loss of dielectric properties when the web straps become contaminated through field use
- Load limit 4,000 lbs.

Conductor Tension Tool

- Can be used for temporarily isolating sections of lines, changing out dead end insulators and line splicing
- Load limit 4,000 lbs.
- Tension tool can be installed and operated using hot sticks
- Conductor hooks have hot stick eyes and hot stick operable safety latches; hooks are stationary
- Metal components are heat treated aluminum alloy or bronze alloy

Hastings #	Description	Weight
3464	5/35kV, 57"-69" Range	12 lbs.



Telescopic Shotgun Sticks

- Extended length spear offers easy method of locating the eye of hot taps that are otherwise difficult to locate
- Head is molded of non-conductive polycarbonate-durable, impact-resistant and unaffected by temperature extremes
- New operating rod guide eliminates trapped dirt and moisture
- Hook release trigger is shielded and requires deliberate action to open the hook
- Hanger hook is molded in the head, eliminating metal parts
- For universal fitting on base end- add suffix -U to the Mfg #

Hastings #	Operating Length	Retracted Length
8158	5'1", 6'6", 8'	5'1"
8158-U	5'1", 6'6", 8', Universal Fitting	5'1"
8158-80	6'6", 8'	5'1"
8158-98	8'2"	5'1"
81611	6'6", 8', 9'6", 11'	6-1/2'
81611-97	8', 9'6", 11'	6-1/2'
81-811	8', 9'6", 11', 12'6"	8'
81-814	8', 10', 12', 14'	8'
81-814U	8', 10', 12', 14', Universal Fitting	8'
81-1018	9'10", 11'9", 13'6", 15'6", 17'6"	9'10"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Hastings #	Description
13412	6'6" Folding Shotgun Stick
13413	8'6" Folding Shotgun Stick
13413-U	8'6" Folding Shotgun Stick with Universal Fitting
13414	10'6" Folding Shotgun Stick
13415	12'6" Folding Shotgun Stick

Folding Shotgun Stick with External Operating Rod



Hastings #	Description
8104	4'6", External Operating Rod
8106	6'6", External Operating Rod
8108	8'6", External Operating Rod
8110	10'6", External Operating Rod
8112	12'6", External Operating Rod
8110-U	10'6", External Operating Rod, Universal Fitting
8204	4'6", Internal Operating Rod
8206	6'6", Internal Operating Rod
8208	8', Internal Operating Rod
8210	10'6", Internal Operating Rod
8212	12'6", Internal Operating Rod
8208-U	8', Internal Operating Rod, Universal Fitting
8208-UX	8', Internal Operating Rod, Universal Fitting, Bottom Break Hook

Fixed Length Shotgun Stick

- Full open side hook offers unobstructed vision of the hook
- Operating rod guide eliminates trapped dirt and moisture
- Inside area of rod guide can be easily cleaned
- Hook release trigger is shielded
- Requires deliberate action to open hook
- All shotgun sticks are tested per OSHA and ASTM F-711
- For universal fitting on base end add suffix -U to the Mfg #, for bottom break hook add suffix -X



External



Internal



Hastings #	Operating Length	Retracted	Base Dia
EV-25	25'6"	64"	1.91"
EV-30	30'	66"	2.07"
EV-35	35'	68"	2.22"
EV-40	39'6"	69"	2.38"

Combination Tel-O-Pole Hot Stick and Measuring Stick

- Open and close switches, disconnects, line fuses, cut outs, as well as measure elevated heights
- Markings are printed in large easy to read numbers
- Eye-level reading, no calculations required



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Tel-O-Pole Measuring Stick

- Used to measure overhead lines, telephone, cable-TV, highway clearances and structures
- Eye-level reading, no calculations required
- Positive locking buttons, spring-loaded, easy to extend
- Standardized parts for quick and easy repair and replacement

Hastings #	Operating Length	Retracted Base Dia.
E-25	25'	65-3/4"
E-30	30'	65-3/4"
E-35	35'	65-3/4"
E-40	40'	65-3/4"
E-50	50'	69-3/16"



Tel-O-Pole Bucket Stick

- Ideal for quick access for linemen working from a bucket truck
- Stick collapses below lip of bucket
- Light-weight bucket storage canister available

Hastings #	Operating Length	Retracted	Base Dia
HV-208	8'	26"	1.75"
HV-312	12'	37"	1.61"
06-185	Bucket Storage Canister for HV-208		
06-186	Bucket Storage Canister for HV-312		



Tel-O-Pole II Hot Stick

- "No Twist" stick has a unique triangular design
- Fluorescent green tip section is highly visible and has a foam core
- Sections can be removed or added to make the stick the preferred length
- Ergonomic design gives the operator a better gripping surface for better control



Hastings #	Operating Length	Retracted	Base Dia
HV-212	12'7"	58"	1.45"
HV-216	16'9"	60"	1.61"
HV-220	21'	62"	1.75"
HV-225	25'6"	64"	1.91"
HV-230	30'	66"	2.07"
HV-235	35'	68"	2.22"
HV-240	39'6"	69"	2.38"



Tel-O-Pole Hot Stick with Tip Lock Feature

- Tip retracts and locks into next larger section
- Tip diameter is 7/8" (extended) or 1-3/32" (retracted)

Hastings #	Operating Length	Retracted	Base Dia
ST-225	17', 25.5'	60"	2-3/16"
ST-230	17', 21.5', 26', 30'	61-5/8"	2-3/8"
ST-235	17', 21.5', 26', 30', 35'	63-3/8"	2-11/16"
ST-240	22', 26', 30', 35', 40'	65-3/5"	2-7/8"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Hastings #	Operating Lengths	Retracted	Base Dia
S-212	12'	44"	1-5/8"
S-216	12'4", 16'	56"	1-5/8"
S-220	17', 20'	58"	1-7/8"
S-225	17', 21', 25.5'	60"	2-3/16"
S-230	17', 21.5', 26', 30'	61-5/8"	2-3/8"
S-235	17', 21.5', 26', 30', 35'	63-3/8"	2-11/16"
S-240	22', 26', 30', 35', 40'	65-3/8"	2-7/8"

Standard Tel-O-Pole Hot Stick

- Can be locked at each length listed
- Tip diameter is 7/8"
- Tip section will not interlock



Telescoping Disconnect Tool

- Perform routine jobs from ground level
- Universal end fitting on insulated top section
- Heavy-duty, spring-loaded plastic buttons keep extended tool sections locked in place
- Standard duty sticks retract to approximately 5' to 6', compact 2' to 3', and heavy-duty 5'



Chance #	Tip Diameter	Extended Length	Base Diameter	# of Sections
C4031017	1-1/16" Standard	8'-12'	1-1/2"	3
C4031022	1-1/16" Standard	22'-26'-30-1/2'-35'	2-1/2"	6
T4033349	1-1/16" Standard	22'-28'-34'-40'	2-1/2"	8
T4032205	1-1/16" Compact	7'	1-7/8"	5
T4033240	1-1/16" Compact	10'	1-11/16"	4
C4031601	1-1/4" Heavy-Duty	16-1/2'-20-1/2'-25'	2-1/4"	6
C4031602	1-1/4" Heavy-Duty	17-1/2'-21-1/2'-25-1/2'-30'	2-1/2"	7

Grip-All Clampstick, Hinged-Style

- Ideal for limited tool-storage space
- Puts an easy-to-control "finger" on an insulated pole
- For installing hot-line and grounding clamps
- "A" Suffix = metal universal fitting on handle end



Chance #	Overall Length
C4030297	1-1/4" x 8'8"
C4030297A	1-1/4" x 8'8"
C4030298	1-1/4" x 10'6"
C4030298A	1-1/4" x 10'6"

Chance #	Overall Length
C4030291	1-1/4" x 4'9"
C4030291A	1-1/4" x 4'9"
C4030292	1-1/4" x 6'8"
C4030292A	1-1/4" x 6'8"
C4030293	1-1/4" x 8'7"
C4030293A	1-1/4" x 8'7"
C4030294	1-1/4" x 10'7"
C4030295	1-1/4" x 12'7"

Grip-All Clampstick, Single-Piece Style

- Puts an easy-to-control "finger" on an insulated pole
- For installing hot-line and grounding clamps
- "A" Suffix = metal universal fitting on handle end



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Grip-All Clampstick, Telescoping

- Rotating coupler and engineered positive-lock button with safety stop
- Close fit keeps out dirt and moisture
- Foam-center Epoxiglas insulated pole top section
- All controls can be accessed while wearing gloves
- Locks at each length
- Retracted length: 8' 2-3/4"

Chance #	Extended Length
C4031036	8'6-3/4", 10'4-1/2", 12'-1/2", 14'



Chance #	Description
C4031822	6' Long IMPACT Elbow-Puller Tool
C4030704	15kV Plastic Coated Grippers
C4030613	25kV Plastic Coated Grippers

IMPACT Elbow-Puller Tools

- Uses slide-hammer mechanism to disengage and replace elbows
- Tool and grippers help operator control elbow and stiff underground cable lead
- 5 lb. Slide hammer is plastisol coated and flared at both ends
- Both front and rear handgrip areas are coated with Griptread

Chain Binder Type Transformer Gin

- Standard base unit is for mounting on clear pole sections
- Wheel tightened and 36" chain are part of each unit
- 2,000 lb. Maximum ratings, including hand pull force
- 26" Pole length

Chance #	Description
C4000315	5" Extended Base Chain Gin

CHANCE



Chance #	Description
T4001938	5" Extended-Base Strap Gin


Strap-Type Transformer Gin

- Strap-type-ratchet-action mounting mechanism
- Wide handle opening on rapid-action ratchet
- 2,000 lb. Maximum ratings, including load and fall-line pull

Strap-Style Temporary Conductor Support

- Epoxiglas pole 2-1/2" diameter

Chance #	Description
T4001939	48" Two Conductor Supports

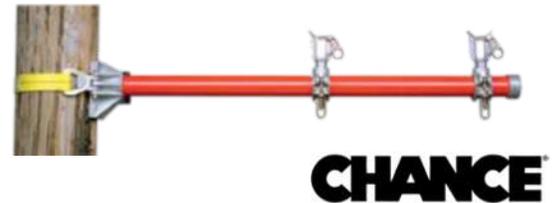

Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com




Hastings #	Description
9467	4' Roller Link Stick

Roller Link Stick

- Used to spread and hold conductors apart for mid-span clearances by attaching tag lines to the butt swivel ring
- Inside head dimensions are 2-1/4" x 2-1/4" allowing the link stick to roll easily over line splices
- 1-1/4" Diameter fiberglass pole
- Load limit, 1,000 lbs.

Fiberglass Extension Arms for Composite or Wood Cross Arms

- Can be used with both Hastings round and Super "U" Extension Arms
- Fits composite or wood cross arms up to 4-1/2" x 6-3/4"
- Rubber grippers won't damage composite cross arms
- Cross arm loop is powder coated to prevent damage to composite cross arm
- Casting trim on end fitting provides protection on bottom side of composite cross arm

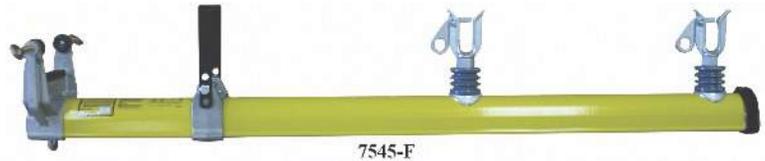

Hastings #	Description	Weight
7545	Standard Super "U" Arm with Two Conductor Holders	18.8 lbs.
7547	Standard Super "U" Arm with One Conductor Holder	15.4 lbs.



Hastings #	Description	Weight
5001	5', One Wire Holder & Insulator	11.5 lbs.
5007	6', Two Wire Holders & Insulators	15.5 lbs.

Fiberglass Extension Arms

- Designed for use as a temporary aid in replacing existing conductors and insulators, or as an aid for moving out conductors to obtain working clearance in congested areas
- Eye bolts are silicon bronze to prevent seizing
- Adjustable
- Load limit 150 lbs. per conductor holder
- Ratings 15kV without insulator and 34.5kV with insulator




Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Super “U” Arm Extensions

- Super “U” Arm is designed with a profile “U” shape for greater strength and durability
- All arms include insulated conductor holders to insure dielectric integrity
- Arms are rated for 34.5kV phase-to-phase work applications
- Standard Super “U” accepts 1-1/16” OD or up to 800 MCM conductor
- Large capacity Super “U” holder has an opening of 2-5/8”
- All Super “U” Arms and Super “U” Conductor Supports have a load limit of 200 lbs. per wire holder
- Interchangeable hanger loop kits are available for the different sizes of cross arms on your system

Hastings #	Description
7546	Super “U” Arm w/Large Hanger Loop, Two Wire Holders, 20.4 lbs.
7547	Standard Super “U” Arm, One Wire Holder, 15.4 lbs.



Hastings #	Description	Weight
5047	49-7/8”, Two Wire Holders	18 lbs.

Pole-Mounted Super “U” Conductor Support Arm with Ratchet and Nylon Strap

- Designed for replacing conductors and insulators and maintenance of line voltages up to and including 34.5kV phase to phase
- Rated with 200 lb. working load per conductor holder
- Includes insulated conductor holders for dielectric integrity

Epoxiglas Extension Arms

- Designed for use on voltages up to and including 15kV
- For use when redactor reconductoring or insulator replacement is necessary
- Two wireholders
- Maximum cross arm size: 3-3/4” x 4-3/4”
- Maximum vertical loading: 150 lb.

Chance #	Arm Dia x Length
H480072	2-1/2” x 6’



Hastings #	Description	Weight
5039	34” Overall Length, One Conductor Holder & Insulator	13 lbs.
5041	48-1/2”, Two Wire Holders & Insulators	16 lbs.

Pole-Mounted Support Arm with Ratchet and Nylon Strap

- Safety ratchet binder and nylon strap eliminates hazards of chains and chain tighteners when being used in primary voltage areas
- Installation and removal of arms is quick and easy
- Ratchet binder has extra wide handle for easy operation when wearing rubber gloves
- 2” wide nylon strap is 44” long to accommodate most structures



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Chance #	Description
C4060181	5' Conductor Cover with 4' Epoxiglas Handle, 25kV
P4060184	5' Conductor Cover w/o Adapter or Handle, 25kV
C4060181GA	5' Conductor Cover with Grip-All Adapter, 25kV
C4060514GA	5' Conductor Cover with Grip-All Adapter, 36kV
C4060182	21" Long, 8-1/2" Wide, 6" High Insulator Cover with Grip-All Adapter, 25kV
C4060182L	21" Long, 8-1/2" Wide, 9" High Insulator Cover with Grip-All Adapter, 25kV

Conductor and Insulator Covers

- Conductor and insulator units mate together to cover pin-type or post-type insulator construction
- Can also be used with deadened cover
- Covers will couple with major brands of rubber line hose and insulator covers of 25kV class
- High-density bright orange polyethylene
- For use with Grip-All adapter for hot stick application or without adapter for rubber glove application



CHANCE



CHANCE

Pole Covers

- Meets Class 4 requirements
- High-dielectric linear polyethylene covers will not flash flame
- Some softening without deformation at approximately 170°F, and will resist brittleness at -50°F
- Ribbed to reduce cover contact with pole
- Rope handles help spread covers and snap around pole

Chance #	Diameter	Length
M49376	9"	72"
C4060000	12"	72"

Arc Snuffer Removal Tool

- Specifically for use in Grip-All clampsticks
- Does not de-energize URD bushings
- Designed to ensure adequate electrical clearances
- Integral ring on each tool retracts into clampstick
- Works like bolt extractor

Chance #	Description
C4032037	Removal Tool
C4032036	Replacement Tool



CHANCE



SALISBURY
by Honeywell

Salisbury #	Description
24401	6' Rescue Hook
24403	8' Rescue Hook

Insulated Rescue Stick

- Used to withdraw an injured worker out of a hazardous area
- Foam filled, fiberglass reinforced handle
- Coated heat treated body hook with an 18" opening



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Extension Arm Accessories

- Epoxy insulator can be added to existing auxiliary arm wireholder to upgrade for 34.5kV
- Wireholder has counterbalanced latch which closes automatically behind the conductor to hold in place
- Complete with 2.5" pole clamp

Chance #	Description
M48057	Epoxy Insulator, 7/16" Threads
M480517	1" Fork-Type Wireholder, No Insulator



CHANCE



HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment

Hastings #	Description	Weight
12666	Conductor Holder	11 lbs.

Super Duty Conductor Holder

- For attachment to mast or jib adapters
- Accepts 2" diameter conductors
- Load limit 500 lbs.

Hot Stick for Huskie and Greenlee In-Line Battery Tools

- Battery tool installs quickly and easily on stick
- 6' and 8' Lengths
- Simply push lever to activate tool, pull to release
- Weights shown below are for the stick only and do not include the battery tool
- Battery tools sold separately

Hastings #	Description	Weight
1256-H	6' Hot Stick for Huskie Tool	4.3 lbs.
1258-H	8' Hot Stick for Huskie Tool	5.0 lbs.
1256-G	6' Hot Stick for Greenlee Tool	4.3 lbs.
1258-G	8' Hot Stick for Greenlee Tool	5.0 lbs.

HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment



HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment

Hastings #	Description
10-178	"V" Brush
10-179	Ten Replacement Brushes

Conductor Cleaning "V" Brush

- Stainless steel bristles to allow the cleanest connection possible
- Can be used for all conductor cleaning requirements
- Can be used with shotgun sticks

Conductor Cleaning "U" Brush

- Stainless steel bristles to allow the cleanest connection possible
- "U" Type brushes for tight clearances and easy storage

Hastings #	Description
10-175	Standard "U" Brush, 500 MCM
10-184	Compact "U" Brush, 500 MCM



HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Hastings #	Description
10-019	Tree Trimmer

Universal Tree Pruner

- Drop forged steel double cutting action blades
- Two pulley rope strings triple the power for cutting limbs up to 1-1/2" diameter
- Complete unit mounted on 12" fiberglass shaft with universal adapter and 25' polypropylene rope



Universal Pruning Saw

- Fast cutting 16" curved steel blade with 7 teeth per inch
- Adapts to all tools with universal heads
- Can be used as a hand saw by attaching handle accessory
- Scabbard is made of leather for safe storage

Hastings #	Description
A 10016	Universal Handle
A 11000	Pruning Saw
A 30007	Saw Scabbard



Photo-Electric Control Tester

- For photo-electric switches and lamps
- Completely eliminates all direct and reflected light
- Designed for use on twist lock type controls up to 4" diameter
- Use with Tel-O-Pole Hot Sticks for test controls and lamps from ground
- Adaptable to all hot sticks equipped with universal type heads

Hastings #	Description
UH-016	4" x 4-1/4"

Universal Lamp Changer Head

Hastings #	Description
151-ACA	For 100-200W
152-AC	For 300-500W
161-AC	For 175W Mercury



Universal Extra Large Adjustable Fuse Puller

- Fits fuses 1-1/2" to 3-5/8" diameter
- Jaws are plastic coated

Hastings #	Description
5455-93	Universal XL Fuse Puller



Static Discharge Stick

- Designed to remove the static charge after de-energizing
- Includes copper "U" hook, 3'6" closed cell foam filled tubular fiberglass stick and 6' of copper grounding cable

Salisbury #	Description
20817	3'8" OAL Static Discharge Stick



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

SALISBURY

by Honeywell



Salisbury #	Length	Diameter	Class
2496	6'	9"	4
2466	6'	12"	4

Air Gap Pole Guard

- Installed before setting new poles to guard against accidental line contact
- Made from orange, Type I ABS, cold weather, high impact thermoplastic
- Drilled rope handles
- ASTM Class 4



SALISBURY

by Honeywell

Versa Guards

- Designed so that two guards can be coupled together to cover most 13kV single and double arm, pin and post constructions, 3.92'

Salisbury #	Description
2389	ABS/PVC 4' Stick Type III Class 4, Grade 1



Madi #	Description
DV-1	DeViner Vine Removal Utility Tool

DeViner The Vine Removal Utility Tool

- Two-prong angled tapered designed for quick vine removal in tight spaces
- Fiberglass reinforced nylon for lighter weight and less fatigue
- Made of fiberglass reinforced nylon for non-conductive material
- 300 pound hanging and compression proof load
- Works with all universal tools
- Aircraft aluminum (6063) base for strong, secure fit

Double-Header Universal Attachment

- Double-header allows you to attach two different universal tool accessories to one hot stick
- Double-Header is made of aircraft aluminum for maximum durability and minimal weight
- Includes two thumb screws

Madi #	Description
DH-1	Double-Header Universal Attachment



Utility Solutions #	Description
USJJ-001	15kV Standard
USJJ-002	27kV Standard
USJJ-004	15kV Loadbreak Cutout

Jack Jumper Cutout Bypass Tool

- Safe and quick method to bypass an overhead cutout without bulky jumper cables
- Tool is indispensable for fuse coordination tasks
- Installation and removal of tool is done with a shotgun stick
- Optional soft carrying case available



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

BLUESTRIPE Telescopic Measuring Hot Stick

- Round telescopic hot stick with large, clear print with BLUE STRIPE patented alignment feature
- Epoxy resin and unique non-woven fiberglass construction creates smoother surface that resists water absorption
- CNC Machined spline end and buttons will hold up to the right rigors of daily use
- Tip lock feature that allows operator to lock last two end sections for maximum strength and rigidity
- Exceeds ASTM F 711 & F1826

Utility Solutions #	Operating Lengths
USTS-008	8'
USTS-010	10'
USTS-016	16', 12'
USTS-025	26', 21', 17'
USTS-030	30', 26', 21', 17'
USTS-035	35', 30', 26', 21', 17'
USTS-040	40', 35', 30', 26', 21', 17'
USTS-045	45', 40', 35', 30', 26'
USTS-050	50', 45', 40', 35', 30'



Utility Solutions #	Volts/Amps	Head
USBS-15-1-PS	15kV/300A	Floating
USBS-15-2-PS	15kV/300A	Duckbill
USBS-27-1-PS	27kV/300A	Floating
USBS-27-2-PS	27kV/300A	Duckbill
USBS-46-1-PS	46kV/200A	Floating
USBS-46-2-PS	46kV/200A	Duckbill




Break-Safe 15kV-46kV Load Break & Pick-Up Tools

- Safety lockout pin provided
- Clear polycarbonate housing provides clear indication of tool position
- Duckbill option for shotgun stick installation
- Capacity: #6 Copper min up to 954 ACSR (1.1 dia) max
- Optional soft carrying case available

Break-Safe 7kV-27kV/600A Load Break & Pick-Up Tool

- Extra-large clamp capable of handling all wire sizes up to 2" in diameter
- Conductor bars allow the use of two mechanical jumper clamps
- Internal safety lock, manual locking pin also included
- Durable electrical grade fiberglass housing
- Glove friendly design

Utility Solutions #	Volts/Amps	Head
USBS600-1	7.2-27kV/600A	Float ing

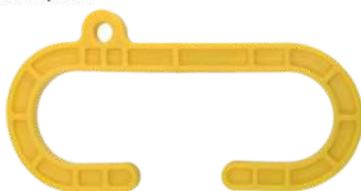

Utility Solutions #	Description
USJH-001	Jumper Hook

Jumper Hook

- Designed to eliminate jumper clamp sag and prevent potential cross-phasing situations
- Minimizes a jumper clamp swaying in high wind conditions
- Easily installed by a gloved hand or with a shotgun stick
- Will fit over any class 2 or 3 line hose and exhibits a flash-over resistance of over 50 kV
- Molded from tough weather resistant polymer
- Size: 11" x 4.5" x .5



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Loadbuster Tool with Case

- Lightweight and portable
- Interrupts with no external arc
- Simplified switching procedure
- Operation counter feature helps determine maintenance needs

S&C #	Description
5300R3/5381	14.4/25 kV nominal, 27 kV max.
5400R3/5381	25/34.5 kV nominal, 38 kV max.



S&C #	Description
4440	Talon Overhead Fuse Handling Tool

Talon Overhead Fuse Handling Tool

- Aluminum-bronze
- Two-pronged fitting and pole, one curled and one straight
- Designed for overhead distribution systems
- Used for installing and removing SMD-20 power fuses, Type XS fuse cutouts, Fault Tamer fuse limiters and TripSaver dropout reclosers



Pole Wrap

- Worker On Line warning printed
- Reflective striping for night time visibility
- Secured with hook and loop

Estex #	Description
1180-45	6" x 45", Reflective Pole Wrap w/Card Holder



Hot Stick Accessories

Hastings #	Description
C40	Vinyl Carrying Case, for HV-225 & 240
P10431	Universal Disconnect Hook
A 10020	Universal Tie Stick Head
A 10023	Universal Wire Tong Head
5455-35	Universal Insulator Controller
5455-46	Universal Socket Wrench, 1/2" Square Drive
5765-13	5/8" Square Magnetic Wrench Socket
A 10400	Fluorescent Universal Disconnect Hook



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Hot Stick Cleaners

- Helps all telescopic sticks slide freely
- Reduces friction caused by wear and contaminants
- Non-conductive, non-flammable



10-091



10-088



10-188



Hastings #	Description
10-088	Hot Stick Spray
10-091	Hot Stick Wax, 14 oz.
10-188	Hot Stick Wipes, Box/50
P31444	Spray Handles (Sold Separately)



Polywater #	Description
S-1	Saturated Towelette



S-1 Hot Stick Cleaner & Water Repellent Wipe

- Pre-saturated, lint-free wipe
- Dual action-cleans and applies water repellent
- Does not remove or adversely affect gloss coat
- Evaporates quickly, no build-up over time
- Removes grease, dirt and grime
- Designed for one time use and easy disposal

B-1 Boom Wipes

- Pre-saturated, lint-free wipe
- Does not remove or adversely affect gel coat
- Prevents build-up over time
- Cleans grease, tar, creosote, salt spray, hydraulic fluid, pine pitch and road debris off fiberglass boom arms
- Water soluble for easy water rinsing
- Designed for one time use and easy disposal

Polywater #	Description
B-1	24" x 24" Individual Saturated Wipe in Sealed Foil Pouch
B-D72	72-Count Canister of 10" x 12" Saturated Wipes
BWC-128	1 gal Boom Wash Concentrate



Chance #	Description
C4002365	Epoxiglas Cleaning Kit
M1904	Hot Stick Wiping Cloths
C4002364	Moisture Eater II Cleaner Solvent (1 gal)
C4001166	Abrasive Cleaning Pads (Box of 20)
C4001520	Gloss Restorer Kit

Epoxiglas Cleaning Kits

- Essential for care and maintenance of Epoxiglas tools
- Cleans insulated boom sections of aerial life trucks
- Do not use on gel-coat or painted boom surfaces
- Includes:
 - 1 gal Moisture Eater II Cleaner
 - Box of 20 abrasive cleaning pads
 - Gloss restorer kit
 - Hot stick wiping cloth



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

W-1 Wax & Buff Wipes for Live-Line Tool Maintenance

- Wax-Saturated, lint-free wipe
- Dual action tandem pack includes dry buffing towel
- Fast-hazing fiberglass wax
- Suitable for rubber and porcelain materials
- Does not remove or adversely affect gel coat
- Leaves non-conductive water-repellent coating
- Prevents continuous water film on stick
- Designed for one time use and easy disposal

Polywater #	Description
W-1	Wax-Saturated Wipe w/Dry Buffing Towel
W-16	16 oz. Fast-Hazing Fiberglass Wax



American
Polywater
Corporation



Chance #	Description
C4002538	Box of 50 Moisture Eater II Wipes

Moisture Eater II Wipes

- For cleaning of insulated hot-line tools, line hose and rubber blankets
- Pre-moistened with a half ounce of orange-scented Moisture Eater II solvent
- Lint-free

CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein #	Description
5144H	.3 lbs.

Hooks for Aerial-Baskets

- All weather nylon polymer
- Accommodates most manufacturer's aerial basket trucks
- Includes single replacement hook for Cat. No. 5144 and Cat. No. 5169



Polymer Hooks

- Injection molded for strength and resistance to cold weather
- Fits all standard buckets
- Also keeps liners from bouncing out

Klein #	Description
1831	Fits 2-3/4" Lip
1833-2	Fits 2" Lip
1833-3	Fits 3" Lip

1831



1250



1250-1



Estex #	Description
1250	8" x 15.5" Canvas
1250-1	6" x 17" Leather

Ditch Bank Blade Cover

- Sewn construction, rivet stress points
- Double cut bush hook guard
- Snap closure



Aerial Bucket Cover, Universal Fit and Collapsible

- Stretches to fit all buckets (2711, 2712)
- Rope lanyards with snap is attached to the cover to secure it to the truck
- Bungee cord sewn into hem for snug fit (2711, 2712, 2713BC)
- Web strap closure (2713WC)



Estex #	Description
2711	Fits 24" x 24" to 24" x 30", One Man
2712	Fits 24" x 48" to 26" x 52", Two Man
2713BC-24-24	Fits 24" x 24" One Man, Collapsible
2713BC-28-34	Fits 28" x 34" One Man, Collapsible
2713BC-24-48	Fits 24" x 48" Two Man, Collapsible
2713WC-24-24	Fits 24" x 24" One Man, Collapsible
2713WC-28-34	Fits 28" x 34", One Man, Collapsible
2713WC-24-48	Fits 24" x 48" Two Man, Collapsible



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Aerial Bucket Cover with Foam & Heat Sealed Seams

- 2" Foam block sandwiched between two layers of fabric in the top to repel water so the cover doesn't sag into the bucket
- Rope lanyard with snap is attached to the cover to secure it to the truck
- Heat-welded pocket allows the cover to be used inside-out if the outside cover is ripped
- Bungee cord sewn into hem for a snug fit

Estex #	Description
2715-24-24	24" x 24", One Man
2715-24-48	24" x 48", Two Man



Estex #	Description
2651	10" x 3" x 19", 2 Pockets
2651-2	10" x 3" x 19", 3 Pockets w/Strap & Snap

Compression Tool & Bolt Cutter Bag

- Heavy vinyl-coated nylon
- Two Grommets for bucket attachment
- Extended back so tool handle doesn't extend too high above the lip of the bucket



Hydraulic Tool Bag Holder

- Holds hydraulic tools up to 10 tons
- Yellow vinyl-coated nylon, will not absorb oil or water
- Heavy polyethylene back board, plastic bottom
- Hang inside or outside aerial basket

Estex #	Description
1863	8" Dia x 16"H (bag), 24"H (back)



Estex #	Description
1807-3	16" x 9" x 20"

Oval Compression Cutter Tool Bag

- Hard body plastic
- Dividers form five compartments
- Detachable strap sketches across the top of the bag to keep tools in place
- Shock absorbing rubber in the bottom protects tools
- Two grommets allow attachment to the aerial basket with hooks
- Rubber "bumper" is attached to the bottom side of the bag to protect the aerial basket from abrasion

Nut & Bolt Bag

- Heavy-duty canvas
- Two webbing straps with quick release snaps for belt attachment
- Top hem reinforced with stiffener

Estex #	Description
1045	9"W x 9"H x 4"D



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Warren Heim Corporation



Warren Heim #	Description
31-206	12" x 15"

Tool Bucket

- Canvas
- Rope and Snap
- One inside pocket

Aerial-Basket Oval Bucket

- Canvas
- Black molded polypropylene bottom
- Two nylon 66 polymer hooks included
- Temperature change resistant hooks
- 15 interior pockets
- 2.05 lbs.

Klein Tools #	Description
5144	10" x 14"



Buckingham #	Description
1217Q3	12" x 15" with Special Fleet logo

Canvas Tool Bag

- Solid, continuous PVC ring in top of polypropylene rope
- 8" x 8" inside pocket
- Molded rubber bottom

Diddy Bag, Nut & Bolt Pouch

- One interior pocket
- Top sides of pouch reinforced with leather to maintain shape of pouch opening
- Inside bottom is reinforced with leather and ventilating eyelet
- Mental snaps provided on loops for easy attachment to belts up to 3" wide
- Top edge reinforced with 1/4" rope

Klein Tools #	Size	Color
51A-I	9" x 10" x 3.5"	Black



Klein Tools #	Description
5109	Straight-Wall Bucket
5109PS-I	Straight-Wall Bucket with One 8" x 8" Inside Pocket & Swivel Snap (No. 2012)

Wide-Opening Straight-Wall Bucket

- Durable No. 6 canvas
- Black molded polypropylene bottom
- Rope handle
- 12" Diameter x 15" height



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Heavy-Duty Tapered-Wall Bucket with Swivel Snap Hook

- Tough No. 4 canvas
- Black molded polypropylene bottom
- Rope handle
- Riveted leather glove strap
- Equipped with No. 2012 swivel snap hook

Klein Tools #	Size
5103S	12" x 12" x 9"



Hard Body Oval Bucket

- Fabric constructed of rugged denier polyester to resist wear and tear on the jobsite
- Black molded polypropylene bottom with drain holes
- No. 5144H hooks sold separately
- Orange color
- Dimensions: 10"H x 7"W x 14"L

Klein Tools #	Description
5144BHB-I	14 Pockets

Tradesman Pro Organizer Backpack

- 34 Interior pockets, 5 exterior pockets
- Orange interior for easy tool visibility
- Wide opening
- Tough, durable molded bottom
- Large front pockets easily fits fish tapes



Klein Tools #	Size
55421-BP	18"H x 14"L x 7"W



Vinyl Equipment Bag

- One exterior pocket
- Wide bag opening easily accommodates helmets and other equipment
- Durable, double-stitched plastic bottom
- Webbing extends down side of bag from handles and shoulder strap for extra support and durability
- Right-sized rain flap with Velcro fastening
- Adjustable, padded shoulder strap included
- Orange color



Lineman's Backpack

- Wide opening easily accommodates helmets, belts and other equipment
- Large front pocket for separate storage of gaffs and rubber gloves
- Padded back area and adjustable padded shoulder straps with adjustable chest strap
- Durable; double-stitched plastic bottom with drain holes

Klein Tools #	Size
5185ORA	23"H x 18"W x 10"D



Klein Tools #	Size
5181ORA	20"H x 10"W x 24"L



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Aerial Tool Apron with Inosil and Hard Body

- Inosil corrosion shield
- Hard body stiffener gives the apron the rigidity of a traditional board
- Non-conductive rod in the top for support
- Two brass grommets for hanging

Estex #	Description
1829-HB-7	23.9" x 4" x 21.25"



Fiberglass Tool Apron

- 3 or 4 Pocket holster
- Wrench and hammer loops
- Canvas nut and bolt bag



Buckingham #	Size
4500	18"L x 20"W, w/3 Pocket Holster
45004	18"L x 20"W, w/4 Pocket Holster

Aerial Basket Tool Apron

- Sewn in stiffener
- 2-Pocket holster
- Hammer loop
- PVC cap bottom
- Two nut and bolt Bags
- Eleven socket pockets
- Two PVC pipe inserts for auger bit holders
- Magnetic strip that allows linemen to store loose hardware and easily access it when required

Buckingham #	Size
4500YM2	21-3/4"H x 4W" x 23-7/8"L



Aerial Apron

- Includes:
 - Ten hand tool pockets
 - Two pouches
 - Hammer loop
 - Two drill bit holders
- Two pouches reinforced with heavy-duty rivets
- Orange color
- Dimensions: 23"H x 24"L



Klein Tools #	Description
51829-I	18 Interior Pockets



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Canvas Tool Bag

- Steel frame keeps bag open and provides security when closed
- Two leather straps secure the opening
- 2" Web handles wrap around the entire bag for added strength
- Bottom is reinforced with heavy vinyl coated nylon and has a double tempered masonite board
- Six brass studs on bottom of the bag to protect against abrasion

Estex #	Description
2114-12	12" x 7.5" x 12"
2114-16	16" x 9" x 12"
2114-18	18" x 9" x 12"
2114-22	22" x 10" x 14"
2114-24	24" x 10" x 14"



Estex #	Description
2100	16" x 9" x 12"
2160	22" x 10" x 14", 7 Inside Pocket

Canvas Tool Bag with Outside Pockets

- Heavyweight #4 canvas duck
- Top opening has a steel frame
- Bottom is reinforced with heavy vinyl-coated nylon and has a masonite board
- Six brass studs on the bottom of the bag protect against abrasion

Equipment Tool Bag

- Hard rubber bottom equipment bag with 2" molded rubber lip to prevent water seeping into the bottom of the bag
- Heavy gauge rubber bottom is double stitched to the bag and is very durable, even in cold weather

Buckingham #	Description
41333R5SY	19"H x 11"W x 24"L



Estex #	Description
2180	22" x 11" x 11"

Heavy-Weight, Vinyl Coated Nylon Tool Bag

- Top zipper opening
- Web handles wrap completely around the bag
- Hard board in the bottom
- Six brass studs on the bottom to prevent abrasion to the bag



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Bucket Storage Bag

- Heavy duty yellow vinyl bag for storage of mechanical crimping tools and bolt/cable cutters
- Bottom is reinforced with thick wall vinyl material and is attached with rivets for strength
- Convenient two-pocket storage keeps tools within easy reach and expedites work
- Used with tool hanger hooks (not included)

Hastings #	Description
05-827	Bucket Storage Bag



Buckingham #	Color
42266	Tanned
42266-BL	Black
42266-BR	Dark Brown

Double Back Holster

- Leather
- Five pockets
- 2-Way knife snap
- 10-3/4" x 8"

Tool Tray

- Fiberglass storage tray
- May be hung on the inside or outside of an aerial basket
- Can be used to store cabling and other miscellaneous equipment
- Mounts using one pair of 5334 PVC hooks (included)

Buckingham #	Description
4510	18"L x 9"W x 11"D



Hastings #	Description
05-831	Holster
05-832	Holster w/Storage for Drill Bits

Hydraulic Impact Wrench and Drill Holster

- Attaches to buckets with or without liners
- Holder can be mounted inside or outside
- Top bracket can be moved to either side to enable holder to be used right or left handed
- Includes Velcro hold-down strap to keep wrench in place



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Chain Saw Scabbard

- Designed for gasoline or hydraulic powered chain saws
- Mounts on bucket for quick and easy access
- Provides safe and convenient storage on bucket
- Prevents accidental damage to chain
- Non-conductive fiberglass
- Will accommodate saws with blades up to 36"
- Fits buckets with or without liners

Hastings #	Description
05-909-1	Chain Saw Scabbard, 3" x 5-3/4" x 36"
05-910-1	Chain Saw Scabbard, 3" x 5-3/4" x 36"



Hastings #	Description
05-929-1	6" x 8" x 20"

Fiberglass Tool Tray

- Fits buckets with and without liners
- Attaches on outside of bucket
- Tray has five compartments with removable partitions



Fiberglass Bucket Step

- Anti-skid material to help prevent slippage
- 26"L x 8-1/2"W x 8"D

Hastings #	Description
05-961	For Buckets w/Liners
05-960	For Buckets w/o Liners



Hastings #	Description
01-3200	4-1/2" OD Aluminum Kit, Fits 30/40 PVC
01-3400	6-5/8" OD Aluminum Kit, Fits 30/40 PVC

Canister Kit

- Latch pin is a captive component and easily operated by a pull or push motion
- Latch pin hinge is stainless steel
- Water and dust proof seal
- Kit includes:
 - Lid assembly
 - End cap
 - Two mounting brackets
 - Adhesive kit
 - Required mounting hardware
 - Instructions



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Speed Systems #	Description
1542-2CL	Wedge Blade Installed, Spare Straight Blade
1542-2CL-1	Wedge Blade Installed, Spare Wedge Blade
1542-2CL-2	Straight Blade Installed, Spare Straight Blade

1542-2CL Series Insulation Stripper

- Cable OD range: 1/2"-1-3/4"
- Adjustable
- Designed to remove PE, XLR, EPR and other types of insulation from medium voltage power cable
- No bushings required

1542-2AS Series Insulation Stripper

- Cable OD range: 1/2"-1-3/4"
- Adjustable
- Designed to strip insulation from power cable and score the semi-conductive outer shield with precise accuracy
- Combines features of 1542-2CL stripper and 1700 scorer
- No bushings required

Speedy Systems #	Description
1542-2AS	Wedge Blade Installed, Spare Wedge Blade
1542-2AS-1	Wedge Blade Installed, Spare Wedge Blade
1542-2AS-2	Straight Blade Installed, Spare Straight Blade



Speed Systems #	Description
2750	End Stripper
2850	Mid-Span and End Stripper
2781	Replacement Blade 2750
2787	Replacement Blade 2850

2750/2850 600V Secondary Insulation Stripper

- Designed to end-strip 600V cable (45 mil to 110 mil thickness)
- Cable OD: .31"-1.375" (2750)
- Cable OD: .31"-1.188" (2850)
- No bushing required

Adjustable Primary URD End Stripper

- For 600V to 35kV cables
- Strips XLPE, polyethylene and EPR insulation
- Precise stripping of insulation only or insulation and semicon simultaneously
- New adjustable strip stop with rotary mechanism
- New adjustment window allows easy setting of stop
- Guarded cutting blade prevents injury
- Accepts SW 2 ratchet wrench for leverage
- Bushing insert fits over cable and presets cutting blade depth
- (See Bushing Selection Table for additional options)

Utility Tool #	Description
37415	WS-5A for .260" to 1.265" Cable OD



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Utility Tool #	Description
30713	For .500" to 2.25" Cable OD

Adjustable URD End Stripper

- For 1/10 AWG to 1,000 MCM URD cable
- Two handles permit safe, easy operation on XLPE, plastic, polyethylene and EPR insulation
- Adjustable trip stop bar gives exact stripped conductor length and can be rotated to allow unlimited stripping
- Safe, clean cuts prevent conductor damages
- CB 50 Blade included with tool

2900 Aerial Tree Wire and Spacer Cable Mid-Span Stripper

- Cable OD 0.40"-1.66"
- Model 2900 Aerial Tree Wire and Spacer Cable Stripper performs both end and mid-span strips on 5kV through 35kV aerial tree wire and spacer cables

Speed Systems #	Description
2900	Stripper with Standard Handles
2872	Replacement Blade



Utility Tool #	Description
12918	For .960" to 1.9" Cable OD

Cable End Stripper

- For 15kV to 46kV cables
- Strips XLPE, polyethylene and EPR insulation
- Precision stripping with no conductor damage
- Guarded cutting blade prevents injury
- Rotating stop bar permits accurate preset stripping lengths of up to 2-7/16"
- WA 3 Adapter included, allows strip lengths up to 5-1/2" and also use of the SW 2 ratchet wrench
- Bushing insert fits over cable and presets cutting blade depth

Mid-Span Stripper

- Operates on all tree wire and pacer cables
- Each tool built for a specific cable size
- Designed for HOT STICK operating
- Strips to any length in one continuous operation
- Strips at end or any point along cable length

Utility Tool #	Description
17500-319	For 1/0 7 Strand Aluminum, Plastic Handle
17500-166	For .7 Strand AAAC, Plastic Handle
18500-238	For .750 to 1.20" Cable OD, Plastic Handle
CB 1	Replacement Blade for Mid-Span Stripper



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com




Utility Tool #	Description
WS68SNAP	Power Driven End Stripper with 3/8" Drill Adapter

SNAP Power Driven End Stripper

- Bushing quick disconnect feature eliminating the need for a hex wrench
- Ergonomic end stripping tool for 600V secondary cable
- Designed to reduce working time and effort on repetitive stripping functions
- Adjustable strip stop with adjustment window allows easy setup for precise strip lengths 0.625" to 2.5"
- Uses standard 2 x 2 and 4 x 4 bushings, from #6 AWG to 500 MCM (concentric, compressed or compacted)
- Strips quickly, even in cold climates
- Precision stripping with no conductor damage
- Guarded cutting blades ensure safety

Universal Adjustable Cable Stripper

- End stripping and mid-span stripping with different blades (interchangeable)
- Dual position jaw is versatile for electric utility applications
- Removes outer jacket on primary power cable
- Adjusts to cable size with spring loaded trigger-action jaw
- Micro-adjustable blade allows accurate setup for a variety of insulation thickness
- Self-feeding tool design
- Compact design for tighter work spaces
- Rugged, all metal body

Utility Tool #	Description
WS64UE	End Stripping Only, Outer Jackets up to 2.5" OD & Insulations to 1.5" OD



Utility Tool #	Description
36001H	4x4 Body Only

4x4 Plus Cable End Stripper

- For 600V secondary cable
- Cutting heads for #6 AWG to 500 MCM conductors (concentric, compressed or compacted)
- Strips 45 mil to 110 mil secondary insulations
- Strips quickly, even in cold climates
- Guarded cutting blades ensure safety
- Precision stripping with no conductor damage
- Bushings change easily with hex wrench




Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Insulation Stripper Accessories

- Replacement blades and tool stops

Speed Systems #	Description
1562	Replacement Wedge Blade
1678	Replacement Scoring Blade
MARK II TOOL STOP	Tool Stop
MARK I TOOL STOP	Tool Stop
1650X	Tool Stop (1542 Series Tools)
1581	Replacement Straight Blade
2672	Replacement Chamfering Blade



1800 Series Semi-Con Scorer (Scriber)

- Cable OD: 1-3/4"-3"
- Adjustable blade length
- For scoring (scribing) the semi-conductive shield of medium voltage cable to remove without nicking or damaging the cable insulation
- Square and spiral cut
- Coil springs

Speed Systems #	Description
1800	Adj Blade Scorer
1800-SS	Adj Blade Scorer w/Dial Locking Set Screw
1800-LC	Adj Blade Scorer w/Saddle Relief



1700 Series Semi-Con Scorer (Scriber)

- Cable OD: 1/2"-2"
- Adjustable blade length
- For scoring (scribing) the semi-conductive shield of medium voltage cable to remove without nicking or damaging the cable insulation
- Square and spiral cut
- Leaf springs

Speed Systems #	Description
1700	Adj Blade Scorer
1700-SS	Adj Blade Scorer w/Dial Locking Set Screw
1700-LC	Adj Blade Scorer w/Saddle Relief
1700-SS-LC	Adj Blade Scorer w/Dial Locking Set Screw & Saddle Relief



Banana Peeler Adjustable Blade Semi-Con Scoring Tool

- Scoring depth from 1 to 90 mils
- For strippable semi-con URD cable shield
- One hand scoring of circumference and length
- Spring-loaded blade assembly assures consistent scoring depth
- Teflon coated cable guide
- Semi-con is cleanly removed with no damage to underlying insulation
- Convertible to a fixed setting



Utility Tool #	Description
BP 1A	For .75" to 1.10" Cable OD
BP 2A	For 1.25" to 1.75" Cable OD
34230	Replacement Blade for BP 1A



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Insulation Chamfer Tool

- Chamfers 15kV to 35kV cable
- Creates a 45° bevel, approximately .125" long
- For XLPE insulations
- Perfect for premolded splices, elbows and terminators
- Complete operation takes 10 seconds or less
- Adjusts easily to fit different cable insulations
- Blades are recessed to prevent injury and blade damage

Utility Tool #	Description
IC1	For .650" to 1.260" Cable OD



Speed Systems #	Description
CT-1	Chamfering Tool for 1/2"-1-3/8" Cables
CT-2	Chamfering Tool for 1-1/4"-2-3/4" Cables
2672	Replacement Blade

CT-1/CT-2 Chamfering Tool

- Chamfering tools cut a 45° bevel on the cable insulation to ease installation of premolded rubber components

TAT/SAT Combination Splice/T-Body Tool

- Combines features of the SAT Splice Assembly Tool and the 800TAT T-Body/Cable Adapter Tool
- Clamp fits 15kV through 35kV components (0.75"-2.625")
- Splice gripping arms open 1-1/2"-3-3/8" (splice sleeve OD range)
- 15" Stroke (two revolutions of drive per inch of stroke)
- Includes carrying bag

Speed Systems #	Description
TAT/SAT	Combination Splice/T-Body Tool



SC-11

SC-10

Speed Systems #	Description
SC10	Edge Wedge w/Leather Sheath
SC11	Edge Wedge w/Finger Grip & Leather Sheath

Semi-Con Edge Wedge

- Designed for lifting the front edge of the semi-con layer after it is scored
- Leather sheath included
- SC-11 has an ergonomic safety grip and stainless steel blade

Semi-Con Roller Grip

- For controlled rolling of the semi-con layer after it is scored
- Broad nose
- Serrated jaws for maximum grip
- Rugged plastic covered handles

Speed Systems #	Description
SC13	Semi-Con Roller Grip



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Speed Systems #	Description
BIT/TK120X-Q	Fits All Loadbreak Bushing Inserts (130 in-lb. Torque Limiter)
BIT/TK120X-N	Fits All Dead Break Bushing Inserts (130 in-lb. Torque Limited)
FIT/TK120X-X	Feed Thru Loadbreak Insert Tool (120 in-lb. Torque Limiter)

15/25kV Probe Installation Tools

- Provide a means of preventing probe arc follower contamination and other damage when installing 15kV, 25kV and Elastimold 35kV probes
- 120 in-lb. Torque Limiter



Speed Systems #	Description
BIT/E180AT	T-Handle
BIT/E180AH	Operating Eye

600A LRTP Torquing Installation Tool

- Bushing insert tool
- Preset torque for installation and removal of 600A load reducing tap plug bushings with 5/16" and/or 3/8" internal hex socket



Speed Systems #	Description
LRTP/TK55	55 ft-lb. Torque Limiter

Speed Systems #	Description
LPW/35R/TK120X-N	Loadbreak Probe Wrench w/Neutral Winder
LPW/35R/TK120X	Loadbreak Probe Wrench

200A Clamp-On Bushing Installation Tool

- For installation and removal of bushing inserts
- Preset torque limiter takes guess work out of bushing installation
- Can be used for bushing removal

Speed Systems #	Description
LPW1525/TK120X-N	Loadbreak Probe Wrench w/Neutral Winder
LPW1525/TK120X	Loadbreak Probe Wrench
LPW1525	Probe Wrench for Use w/1/4" Square Drive
TK120	Torque Limiter w/1/4" Square Drive

200A Loadbreak Bushing Installation Tools

- 180 in-lb preset torque limiter
- For installation and removal of bushing inserts with a 5/16" internal hex socket



35kV Probe Installation Tool

- Provide a means of preventing probe arc follower contamination and other damage when installing 35kV Cooper and Hubbell (Chardon) large interface probes
- 120 in-lb. Torque limiter



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Load Break Bushing Insertion Tool

- For 200A bushing inserts with internal hexagon socket drive
- Secures bushing insert for positive installation and removal
- Multiple drive systems:
 - Adjustable “T” handle
 - 1” Square socket drive
 - 7/8” Hexagon for wrench
 - Standard “Penta” Head

Utility Tool #	Description
LBIT1T	Preset Torque Setting of 180 in-lb.



Utility Tool #	Description
PIT1T	125 in-lb. Torque

Load Break Elbow Probe Insertion Tool

- For 15kV to 35kV elbow-small interface
- Quick and easy insertion of the probe inside the elbow
- Prevents load break probe contamination
- Prevents load break probe breakage
- Reduces cross threading
- Provides the proper tightening forces as recommended by the elbow manufacturers
- Multiple torque delivery system
- Adjustable and removable “T” handle
- 7/8” Steel drive and wrench
- 3/8” Square drive socket
- Load break probe removed by simply reversing the tightening action

Grip-Cleaning Brush Set

- Set of four wire-bristle brushes designed for cleaning Klein wire and cable-pulling grips
- Brushes have stiff wire bristles
- Available in round and square shapes and two lengths for efficient cleaning of different jaw configurations
- Semi-flexible steel shafts set into comfortable wooden handles provide the necessary reach into grips jaws
- Includes:
 - Round bristle 3/8” x 3”, 12” long
 - Square bristle 3/8” x 3”, 12” long
 - Round bristle 1-9/16” x 5”, 14” long
 - Square bristle 1-9/16” x 5”, 14” long

Klein Tools #	Description
25450	Brush Set



Klein Tools #	Cable Range	Max Load	Jaw Length	Weight
KT4500	.180”-.600”	5,000 lbs	4”	3.75 lbs.
KT4800	.70”-1.25”	12,000 lbs	5-1/8”	9 lbs.

Parallel Jaw Grip

- Round jaw
- Large eyelet opening in the handle to accommodate a wide variety of hooks on hoists, winches and tackle blocks



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Parallel Jaw Grips

- Lightweight, compact grips pull an exceptionally wide range of cable types and sizes
- Designed with a round inside jaw contour for maximum contact to minimize cable deformation
- Lower jaw is serrated to firmly grip insulated cables and conductors
- Design includes a latch that prevents the grip from falling in case of jaw disengagement from the cable
- Large diameter eye accommodates large hooks on hoists, winches and tackle blocks
- 2-1/2" Jaw length (1685-20)
- 4-1/2" Jaw length (1685-31)



1685-31



1685-20

Klein Tools #	Cable Range	Max Load
1685-20	.157"-.875"	4,500 lbs.
1685-31	.625"-1.250"	7,500 lbs.



Klein Tools #	Cable Range	Max Load
1656-20	.20"-.40"	4,500 lbs.
1656-30	.31"-.53"	4,500 lbs.
1656-40	.53"-.74"	8,000 lbs.
1656-50	.74"-.86"	8,000 lbs.

Bare ACSR, Aluminum & Stranded Copper Cable Chicago Grip

- Round, smooth inside jaw contour
- Smooth jaws grip with maximum contact and are less likely to damage conductors
- 4" Jaw length (1656-20)
- 4-3/4" Jaw length (1656-30)
- 5-1/2" Jaw length (1656-40 & 1656-50)

Extra High Strength Chicago Curved-Jaw Grip

- Double V grooves provide four-point contact, reducing chance of slipping and providing proper alignment of wire and cable
- 5" Jaw length

Klein Tools #	Cable Range	Max Load
1684-74	.218"-.550"	8,000 lbs.



Klein Tools #	Cable Range	Max Load
1684-5F	.16"-.550"	8,000 lbs.

Aircraft Cable, Extra High Strength, Messenger & Guy Strand Chicago Grip with Replacement File

- Double V grooves provide four-point contact, reducing chance of slipping and providing proper alignment of wire and cable
- 5" Jaw length

Weatherproof Stranded & Solid Chicago Grip

- Round inside jaw contour for weatherproof coated wire
- Notches in jaw provide firm grip on insulation
- 4-3/4" Jaw length

Klein Tools #	Cable Range	Max Loads
1611-30	.31"-.53"	4,500 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Klein Tools #	Cable Range	Max Load
1613-40	.12"- .37"	4,500 lbs.
1684-5	.218"- .550"	8,000 lbs.
1628-17	.50"- .75"	15,000 lbs.
1628-18	.75"-1.00"	15,000 lbs.

Aircraft Cable, Extra High Strength, Messenger & Guy Strand Chicago Grip

- Double V grooves provide four-point contact, reducing chance of slipping and providing proper alignment of wire and cable
- 4-3/16" Jaw length (1613-40)
- 5" Jaw length (1684-5)
- 7-1/4" Jaw length (1628-17 & 1628-18)

Bare Wire Chicago Grip

- Designed for working with solid and stranded bare wire
- Lightweight, especially economical grip
- Single V groove jaw
- 3" Jaw length



Klein Tools #	Cable Range	Max Load
1613-30	.08"- .20"	1,500 lbs.



Klein Tools #	Cable Range	Max Load
1625-20	.28"- .75"	8,000 lbs.
1625-20-1	.50"-1.00"	8,000 lbs.

Wire Rope Haven's Grip

- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" cable area
- Switch latch to help hold cable in the jaw

Haven's Grip

- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" cable area
- Swing latch to help hold cable in the jaw (1604-20L)

Klein Tools #	Cable Range	Max Load
1604-10	.06"- .25"	2,500 lbs.
1604-20	.125"- .50"	5,000 lbs.
1604-20L	.125"- .50"	5,000 lbs.



Klein Tools #	Cable Range	Max Load
KT4650	16"- .90"	5,000 lbs.

Wide Range Distribution Grip

- Large jaw opening accommodates a large range of cables, reducing the number of grips needed
- Combination of a "V" groove jaw and a round jaw allows for a wide range of cables while minimizing cable deformation
- Large handle opening accommodates a wide variety of hooks on hoists, winches, and tackle blocks
- 4-1/2" Jaw length




Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Bulldog-Type Jaw Standard Wire Grip

- Spring loaded

Little Mule #	Description
LMG2000	2,000 lb., 8 to 4/0 AWG

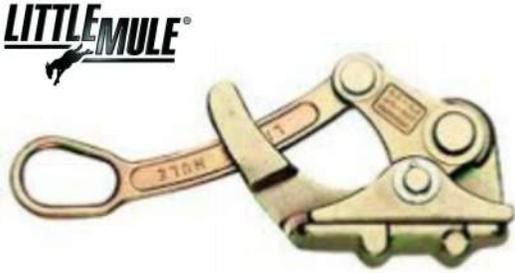

Little Mule #	Description
LMG4500	5,000 lb., 6 to 4/0 AWG
LMG4500A	5,000 lb., 6 to 4/0 AWG
LMG4600	10,000 lb., 1 AWG to 450 MCM
LMG4700	20,000 lb., .397 to 1130 MCM
LMG4800	12,000 lb., .397 to 1130 MCM
LMG4900	20,000 lb., 1033 to 2500 MCM

Parallel Jaw Standard Wire Grip

- Spring loaded
- “A” Suffix indicates aggressive teeth for extra high strength cable

Parallel Jaw Hot Line Wire Grip

- Spring loaded
- Notched handle
- “A” Suffix indicates aggressive teeth or extra high strength cable

Little Mule #	Description
LMG4501	5,000 lb., 6 to 4/0 AWG
LMG4501A	5,000 lb., 6 to 4/0 AWG



Little Mule #	Description
LMG4502	5,000 lb., 6 to 4/0 AWG
LMG4702	20,000 lb., .397 to 1130 MCM
LMG4802	12,000 lb., .397 to 1130 MCM

Parallel Jaw Hot Line Wire Grip Less Spring and Notch

- No spring or notch

Little Mule wire grips open easily and release instantly to quickly insert or remove wire, have large handle eye openings and are forged steel construction with yellow chromate finish.

Klein Tools offers a large number of grips, please contact us with the specifications of the job so we can happily help you select the necessary items for your needs!



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Slingco #	Color	Conductor Dia	Lattice Length	Breaking Strength
ZCS1710	Dark Green	.25"- .50"	31"	7,000 lbs.
ZCS1711	Brown	.50"- .75"	45"	10,500 lbs.,
ZCS1712	Light Blue	.75"-1.00"	43"	14,100 lbs.
ZCS1713	Gold	1.00"-1.25"	65"	25,000 lbs.
ZCS1714	Black	1.25"-1.50"	59"	31,000 lbs.
ZCS1715	Red	1.50"-1.75"	82"	31,000 lbs.
ZCS1716	Dark Blue	1.75"-2.25"	82"	49,000 lbs.
ZCS1750	Yellow	2.00"-2.50"	72"	49,000 lbs.
ZCS1751	Orange	2.50"-3.00"	72"	49,000 lbs.
ZCS1752	Aluminum	3.00"-3.50"	74"	49,000 lbs.
ZCS1753	Light Green	3.50"-4.00"	76"	49,000 lbs.

MU Type, Multi-Weave Cable Grip

- Triple weave construction ideal for heavy loads
- Color-coded for ease of identification
- Primarily for pulling overhead aluminum conductor



R Type, Revolving Multi-Weaver Cable Grip

- Rotating eye cable grip with triple weave construction
- Color-coded for ease of identification
- Steel forged revolving head is ideal for connecting to swivels and shackles
- Primarily for pulling overhead aluminum conductor
- NOTE: Rotating eye does not swivel under load

Slingco #	Color	Conductor Dia	Revolving Eye Dia.	Lattice Length	Breaking Strength
ZCS2177	Dark Green	.25"- .50"	.875"	31"	7,000 lbs.
ZCS2178	Brown	.50"- .75"	1.00"	45"	10,500 lbs.
ZCS2179	Light Blue	.75"-1.00"	1.00"	43"	14,100 lb.
ZCS2180	Gold	1.00"-1.25"	1.625"	65"	25,000 lbs.
ZCS2181	Black	1.25"-1.50"	1.875"	59"	31,000 lbs.
ZCS2182	Red	1.50"-1.75"	1.875"	82"	31,000 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Splicing Grip-Multi Weave

- Multi weave construction
- Strongest device for temporary splicing of conductor and wire ropes as well as cable reinforcements



Slingco #	Color	Conductor Dia	Lattice Length	Breaking Strength
ZCS2552	Dark Green	.25"- .50"	63"	7,000 lbs.
ZCS2553	Brown	.50"- .75"	90"	10,500 lbs.
ZCS2446	Light Blue	.75"-1.00"	90"	14,100 lbs.
ZCS2554	Gold	1.00"-1.25"	130"	25,000 lbs.
ZCS2547	Black	1.25"-1.50"	130"	31,000 lbs.
ZCS2555	Red	1.50"-1.75"	164"	31,000 lbs.
ZCS2556	Dark Blue	1.75"-2.25"	164"	40,000 lbs.



Wind Turbine Support Grip-Heavy-Duty Thimble Offset Eye

- 316 Stainless steel cable support and control for inside the wind turbine
- Rounded copper ferrules and reduced cable contact for high vibration environments



Slingco #	Conductor Dia	Lattice Length	Breaking Strength
ZCS2844	.31"- .40"	25"	1,485 lbs.
ZCS2845	.40"- .60"	26"	2,295 lbs.
ZCS2846	.60"- .80"	28"	2,900 lbs.
ZCS2847	.80"- .99"	29"	4,550 lbs.
ZCS2848	.99"-1.19"	29"	5,450 lbs.
ZCS2849	1.19"-1.58"	31"	7,800 lbs.
ZCS2850	1.58"-1.98"	39"	10,750 lbs.
ZCS2851	1.98"-2.37"	39"	10,750 lbs.
ZCS2852	2.37"-2.77"	47"	14,000 lbs.
ZCS2853	2.77"-3.55"	47"	14,000 lbs.
ZCS2854	3.55"-4.33"	47"	18,000 lbs.



ST Type, Single Eye Twin-Weave Cable Grip

- Double weave construction for medium to heavy pulling in underground applications



Slingco #	Conductor Dia	Lattice Length	Breaking Strength
ZCS2511	.50"- .62"	21"	4,500 lbs.
ZCS2512	.62"- .75"	24"	5,600 lbs.
ZCS2513	.75"-1.00"	24"	6,800 lbs.
ZCS2514	1.00"-1.50"	24"	9,600 lbs.
ZCS2515	1.50"-2.00"	24"	16,400 lbs.
ZCS2516	2.00"-2.50"	24"	18,500 lbs.
ZCS2517	2.50"-3.00"	24"	24,500 lbs.
ZCS2518	3.00"-3.50"	24"	24,500 lbs.
ZCS2519	3.50"-4.00"	26"	31,000 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



A Type, High Strength Cable Grip

- Can be used for aluminum conductor or for pulling rope
- Color-coded for ease of identification
- Strongest Slingco cable grip
- Feeder tubes are recommended when inserting cable or rope into “A” Type grips

Slingco #	Color	Conductor Dia	Rope Dia	Overall Length	Lattice Length	Breaking Strength	Feeder Tube
ZCS1799	Black	.25”-.40”	.25”-.65”	40”	28”	7,000 lbs.	FTU1890
ZCS1800	Dark Green	.40”-.63”	.50”-.90”	55”	41”	14,000 lbs.	FTU1891
ZCS1801	Red	.63”-.88”	.75”-1.10”	74”	58”	20,000 lbs.	FTU1892
ZCS1802	Dark Blue	.88”-1.13”	1.00”-1.50”	87”	68”	30,700 lbs.	FTU1893
ZCS1803	Yellow	1.13”-1.38”	1.25”-1.70”	112”	90”	47,000 lbs.	FTU1894
ZCS1804	Aluminum	1.38”-1.90”	1.50”-2.10	121”	96”	67,000 lbs.	FTU1895

Triple Weave-Single Eye-Shoulder Grip

- Color-coded
- Flexible eye with shoulders and trip weave galvanized wire construction



DCD #	Color Code	Size Range	Approx. Mesh Length	Approx. Breaking Strength	Weight
00681-006	Dark Green	0.25” to 0.49”	28”	6,500 lb.	0.41 lb.
00681-012	Brown	0.50” to 0.74”	33”	10,400 lb.	0.79 lb.
00681-019	Light Blue	0.75” to 0.99”	41”	16,000 lb.	1.47 lb.
00681-025	Gold	1.00” to 1.24”	51”	25,400 lb.	3.46 lb.
00681-032	Black	1.25” to 1.49”	60”	31,700 lb.	4.11 lb.
00681-038	Red	1.50” to 1.99”	75”	32,000 lb.	4.81 lb.
00681-048	Yellow	2.00” to 2.49”	75”	44,600 lb.	8.12 lb.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Kellems Overhead DUA-PULL Pulling Grips

- Flexible eye, double weave mesh, galvanized steel
- DUA-PULL pulling grips are the highest strength pulling grips manufactured for overhead transmission line stringing applications
- Have a dual function, not provided by any other grip, of working with both bare and insulated conductors and synthetic rope



Hubbell #	Conductor Diameter	Rope Diameter	Approx Breaking Strength	E Length	M Length	Eye B Diameter	Over Cable & Grip	Color Code
33271037	.19”-.37”	.25”-.65”	6,500 lbs.	10”	24”	.220”	.200”	Black
33271038	.38”-.62”	.50”-.90”	14,000 lbs.	12”	36”	.375”	.280”	Dk Green
33271039	.63”-.87”	.75”-1.10”	20,000 lbs.	13”	48”	.437”	.360”	Red
33271040	.88”-1.12”	1.00”-1.50	30,600 lbs.	15”	60”	.500”	.500”	Dk Blue
33271041	1.13”-1.37”	1.25”-1.70”	46,800 lbs.	18”	76”	.625”	.625”	Yellow
33271042	1.38”-1.90”	1.50”-2.10”	66,500 lbs.	24”	89”	.750”	.750”	Aluminum

Hubbell #	Cable Diameter Range	Approx Breaking Strength	E Length	M Length
33041082	.50”-.62”	4,500 lbs.	8”	21”
33041083	.63”-.74”	5,600 lbs.	8”	24”
33041084	.75”-.99”	6,800 lbs.	9”	24”
33041085	1.00”-1.49”	9,600 lbs.	9”	24”
33041086	1.50”-1.99”	16,400 lbs.	11”	24”
33041087	2.00”-2.49”	18,500 lbs.	12”	24”
33041088	2.50”-2.99”	24,500 lbs.	12”	24”
33041089	3.00”-3.49”	24,500 lbs.	14”	24”
33041090	3.50”-3.99”	31,000 lbs.	14”	26”

Kellems Underground T-Type Pulling Grips

- Flexible eye, double weave, galvanized steel
- Made of high strength galvanized steel strand
- Feature double weave mesh for positive holding power in medium to heavy pulling jobs
- Grip eye will easily attached to a swivel



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com




Hubbell #	Cable Diameter Range	Approx Breaking Strength	E Length	M Length
33041091	.75"- .99"	6,800 lbs.	9"	36"
33041092	1.00"-1.49"	9,600 lbs.	9"	36"
33041093	1.50"-1.99"	16,400 lbs.	11"	36"
33041094	2.00"-2.49"	18,500 lbs.	12"	36"
33041095	2.50"-2.99"	24,500 lbs.	12"	36"
33041096	3.00"-3.49"	24,500 lbs.	14"	36"
33041097	3.50"-3.99"	31,000 lbs.	14"	40"

Hubbell #	Cable Diameter Range	Approx Breaking Strength	E Length	M Length	Material
2201001	.50"- .62"	530 lbs.	4"	10"	Tin-Coated Bronze
2201002	.63"- .74"	790 lbs.	4"	10"	Tin-Coated Bronze
2201003	.75"- .99"	1,020 lbs.	4"	13"	Tin-Coated Bronze
2201005	1.00"-1.24"	1,610 lbs.	5"	14"	Tin-Coated Bronze
2401005	1.00"-1.24"	1,610 lbs.	5"	14"	Stainless Steel
2201006	1.25"-1.49"	1,610 lbs.	5"	15"	Tin-Coated Bronze
2201007	1.50"-1.74"	1,610 lbs.	5"	17"	Tin-Coated Bronze
2401007	1.50"-1.74"	1,610 lbs.	5"	17"	Stainless Steel
2201008	1.75"-1.99"	2,150 lbs.	6"	19"	Tin-Coated Bronze
2401008	1.75"-1.99"	2,150 lbs.	6"	19"	Stainless Steel
2201009	2.00"-2.49"	3,260 lbs.	6"	21"	Tin-Coated Bronze
2201010	2.50"-2.99"	3,260 lbs.	6"	23"	Tin-Coated Bronze
2201011	3.00"-3.49"	4,900 lbs.	8"	25"	Tin-Coated Bronze
2201012	3.50"-3.99"	4,900 lbs.	8"	27"	Tin-Coated Bronze

Kellems Standard Duty Support Grips

- Double eye, single weave, closed mesh
- For permanent support when cable end is available to be installed through grip
- Change Hubbell # from 22 to 24 for stainless steel

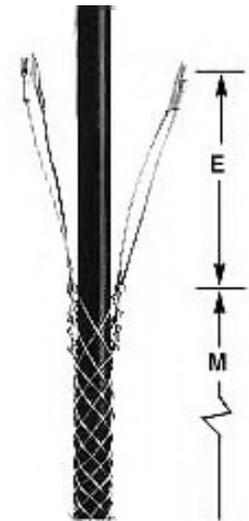

Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

DCD #	Locking Part #	3:1 Safe Working Load	5:1 Safe Working Load	A	B	C	D	Weight
00505-015	00505-015A	3,500 lbs.	2,100 lbs.	1"	13/32"	3/8"	3-7/8"	.51 lb.
00505-020	00505-020A	5,000 lbs.	3,000 lbs.	1-1/4"	17/32"	13/32"	4-3/4"	1 lb.
00505-025	00505-025A	7,000 lbs.	4,200 lbs.	1-3/8"	9/16"	1/2"	5-1/8"	1.4 lb.
00505-027	00505-027A	9,000 lbs.	5,400 lbs.	1-1/2"	19/32"	1/2"	5-5/8"	1.8 lb.
00505-030	00505-030A	10,000 lbs.	6,000 lbs.	1-5/8"	11/16"	5/8"	6"	2.1 lb.

Line Swivels

- Constructed with a thrust bearing for tensile load and a radial bearing for bending load
- Sizes 00505-020 and larger are supplied with a grease point for lubrication
- High safe working load and compact design



808 Champion Swivels

- Designed for underground and overhead cable pulling applications
- Machined from high-strength stainless steel
- Capable of handling all types of utility cables



Condux #	3:1 Safe Working Load	5:1 Safe Working Load	A	B	C	D	E	F	G
08017000	600 lbs.	360 lbs.	5/8"	.28"	3.56"	.79"	.25"	.37"	.295"
08016000	2,500 lbs.	1,500 lbs.	7/8"	.38"	4.51"	1.06"	.31"	.53"	.375"
08016000H	2,500 lbs.	1,500 lbs.	7/8"	.38"	4.51"	1.06"	.31"	.53"	.375"
08080912	5,000 lbs.	3,000 lbs.	1-1/4"	.56"	5.44"	1.34"	.37"	.59"	.565"
08080912H	5,000 lbs.	3,000 lbs.	1-1/4"	.56"	5.44"	1.34"	.37"	.59"	.565"
08080913	7,000 lbs.	4,200 lbs.	1-3/8"	.56"	5.25"	1.31"	.44"	.56"	.530"
08080913H	7,000 lbs.	4,200 lbs.	1-3/8"	.56"	5.25"	1.31"	.44"	.56"	.530"
08080916	10,000 lbs.	6,000 lbs.	1-5/8"	.63"	6.51"	1.59"	.56"	.78"	.530"
08080916H	10,000 lbs.	6,000 lbs.	1-5/8"	.63"	6.51"	1.59"	.56"	.78"	.530"
08080920	15,000 lb.	9,000 lb.	2"	.75"	6.99"	1.78"	.62"	.72"	.750"
08080920H	15,000 lb.	9,000 lb.	2"	.75"	6.99"	1.78"	.62"	.72"	.750"
08080925	25,000 lb.	15,000 lb.	2-1/2"	1"	10.23"	2.80"	.87"	1.23"	1.135"
08080925H	25,000 lb.	15,000 lb.	2-1/2"	1"	10.23"	2.80"	.87"	1.23"	1.135"
08080930	30,000 lb.	18,000 lb.	3"	1.31"	12.04"	3.56"	1.12"	1.37"	1.630"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

821 Champion Swivels

- Designed for underground and overhead cable pulling applications
- Capable of handling all types of utility cable
- Machined from stainless steel

Condux #	3:1 Safe Working Load	5:1 Safe Working Load	A	B	C	D	E	F	G
08210007	1,800 lbs.	1,080 lbs.	7/8"	.31"	3.09"	.84"	.31"	.38"	.305"
08210012	4,000 lbs.	2,400 lbs.	1-1/4"	.59"	4.52"	1.22"	.38"	.44"	.410"
08210014	7,500 lbs.	4,500 lbs.	1-7/16"	.59"	5.13"	1.41"	.44"	.59"	.600"
08210018	10,000 lbs.	6,000 lbs.	1-7/8"	.75"	7.06"	1.88"	.63"	.81"	.755"



Stainless Steel Line Pulling Swivel

- For underground and overhead pulling applications
- High grade stainless steel construction
- Designed to allow easy passage through sheaves



Rope-to-Swivel Connector

- Connectors connect the cable pulling rope, up to 1" in diameter, to the pulling swivel
- Makes connecting the pulling rope and the pulling swivel easier
- Connectors feature a removable sheave for rope eye
- Capacity:
 - 10,000 lbs. maximum rated in conduit
 - 6,000 lbs. maximum rated overhead

Greenlee #	Description
39902	Rope-to-Swivel Connector



Slingco #	Underground Load	Overhead Load
ZSW2091	2,250 lbs.	1,350 lbs.
ZSW2092	3,500 lbs.	2,100 lbs.
ZSW2093	5,000 lbs.	3,000 lbs.
ZSW2094	7,000 lbs.	4,200 lbs.
ZSW2096	10,000 lbs.	6,000 lbs.
ZSW2097	15,000 lbs.	9,000 lbs.

Lewis #	Overall Length	Pin Diameter	Jaw Opening	Overall Diameter	Working Load	Approx. Breaking Strength
HD-00	4-1/8"	5/16"	3/8"	7/8"	1,500 lbs.	4,500 lbs.
HD-0	5-1/4"	7/16"	1/2"	1-1/8"	5,400 lbs.	16,200 lbs.
HD-1	6"	1/2"	5/8"	1-7/16"	9,000 lbs.	27,000 lbs.
HD-2	7-1/8"	5/8"	5/8"	1-5/8"	12,000 lbs.	36,000 lbs.
HD-3	8-5/8"	3/4"	3/4"	2"	21,000 lbs.	63,000 lbs.
HD-4	10"	7/8"	7/8"	2-3/8"	30,000 lbs.	90,000 lbs.



Heavy-Duty Ball Bearing Swivels

- Designed for tension stringing and insuring conductor remains in a neutral position
- Manufactured from high-grade pre-stressed steel
- Pins are screwdriver removable



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Greenlee #	Size
435	3/16" x 3,000'

Conduit Measuring Tape

- Fish and measure conduit runs in one operation
- Permanently printed measurements every foot from zero to 3,000'
- Made of strong waterproof polyester
- Pay-out dispenser has anti-skid pads, handle and built-in cutter
- Tensile strength: 170 lbs. average breaking strength

Ultra Tugger 10 Cable Puller 10,000 lb. Rated

- 2-Speed gear-motor enables 20% faster pulling time
- Shift from high-speed/low-load pulling to low-speed/high-load pulling with a simple double-tap motion on the foot-pedal
- Available with Mobile VersiBoom for less than 2-minute, one person set-up, and 20' tall
- Available with floor mount and chain mount for tighter spaces
- Customized gear motor specifically for heavy-duty cable pulling application and meet UL & cUL safety requirement
- Pulling force: maximum: 10,000 lbs., continuous: 6,500 lbs.

Greenlee #	Description
6900	UT10-2S Package with Floor Mount
6906	UT10-2S Package with Mobile VersiBoom II
UT10-2S	Puller Assembly



Greenlee #	Description
6800	Cable Puller with Standard Force Gauge & Floor Mount

Ultra Tugger 8 Cable Puller 8,000 lb. Rated

- VersiBoom system provides fast set-up with no anchors to set or chains to mount
- Boom uses 3" rigid steel conduit for easy length adjustment to pull 10' to 20' of cable out of the box fast and easy
- Direct gear drive
- Easy to move around jobsite with mobile carriage

Ultra Tugger 5 Cable Puller, 5,000 lb. Rated

- Pull speed range of 9 to 14 fpm will complete most 500' pulls in one hour or less
- VersiBoom system provides fast setup with no anchors to set or chains to mount
- Boom uses 3" rigid steel conduit for easy length adjustment to pull 10' to 20' of cable out of the box fast and easy
- Cable puller basic package includes:
 - Standard force gauge
 - Wheeled carriage
 - 4' Boom
 - Boom mount and nose unit
 - 2-1/2", 3" & 4" Slip-in couplings
 - 2-1/2", 3" & 4" Screw-on couplings

Greenlee #	Description
6503	Cable Puller Basic Package



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Sherman + Reilly #	Description
CP-50	Compact Safety Puller



Compact Puller

- Capstan puller for installation of service drops
- 50 lb. pulling capacity
- Reduces risk of installer injury by eliminating hand pulling
- Light weight-less than 40 lbs.
- Portable and wheeled for easy construction-site use
- On board power from a gasoline-powered drill (sold separately)
- Spuds for adapting to various conduit sizes included



Greenlee #	Length	Weight
430	6,500' Green Tracer	11 lbs.
431	5,200' Yellow Tracer	12 lbs.

Poly Line

- Ready-to-use, pre-punched hole in lid with resealable cap
- Use with power fishing systems directly from the container
- Resists tangling when dispensing
- Rot and mildew resistant
- Handy reusable plastic dispenser pail with handle keeps the line dry
- Use to pull rope through conduit
- Tensile strength: 210 lbs. average breaking strength
- Green color
- Thickness: 1 ply
- Type: twine, spiral wrap, tracer

ED Junior Digital Dynamometer with 2 Anchor Shackles

- Selectable in lb, kg and newtons
- 7:1 Factor of safety at all capacities
- Accuracy: 0.2% of capacity
- Aircraft quality 500% 2024 aluminum construction
- NEMA 4 Enclosure
- 128 x 64 graphic LCD display shows all digits 1.0" high
- Display update rate: 2 times per second
- Calibration: traceable to the NIST
- Powered by two C batteries
- Battery life: 320 hours typical use
- Batteries, manual and calibration card included



Dillon #	lbf	Kgf	N
36190-0046, EDjr-2T	5,000	2,000	20,000
36190-0053, EDjr-5T	10,000	5,000	50,000



Dillon #	Dial Size	Capacity x Div Size
30006-0050	5"	5,000 Lbf x 50
30006-0084	5"	10,000 Lbf x 100
30006-0100	5"	20,000 Lbf x 200
30007-0109	10"	20,000 Lbf x 100
30784-0033	10"	50,000 Lbf x 200

AP Mechanical Dynamometer

- Pound capacities
- Accuracy: +0.5 of capacity
- Temperature range: -50°F to 150°F
- Non-corrosive construction:
 - Pressure bar-powder coated high grade alloy steel
 - Shackles-electroless nickel-plated A4140 forged steel
 - Shackle pins: electroless nickel-plated E4340 steel
- 5" Model have high strength composite plastic case enclosure
- 10" models have cast aluminum enclosure
- Calibration: traceable to NIST
- User's guide and calibration card included
- CE approval



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Clipping Hook

- 6,500 lb. safe working load
- Each unit is tagged showing the safe working load, proof test date, and an identifying serial number



SFS #	Description
S22-771	Clipping Hook

Sagometer

- Accurate thermometer encased in a section of aluminum conductor
- Helps determine the actual temperature of the conductor being sagged
- Range is -40° to 160°F



SFS #	Description
CT40-160	Sagometer

Sagwatch

- Used to accurately determine sag simply and rapidly
- Water and shock resistant
- Antimagnetic, housed in a stainless steel case



SFS #	Description
SW-E	Sagwatch

Jameson Buddy System

Fiberglass core is coated with high visibility polymer sheath to protect against rod abrasion and reduce friction. Round, flexible rod slides easily over wires in occupied conduit. Exceptional bending strength for maneuvering tight turns. Non-conductive and will not kink.



Jameson #	Description
12-516-300M	300' x 5/16"
12-516-400M	400' x 5/16"
13-716-500M	500' x 7/16"
13-716-600M	600' x 7/16"

Duct Hunter Detectable Rodder

- Duct Hunter incorporates a copper trace wire in the rod to meet your locating and tracing requirements on the job
- Trace or map underground conduit or pipe without digging or trenching
- Accessory kit included (12-516-AK or 136-716-AK)

Easy Buddy Fiberglass Conduit Rodder

- Designed to handle tight turns and long runs, makes it ideal for 1"-2" conduit
- More flexible and smaller than Good Buddy
- 4" Bend radius; 400-lb. pull/tensile strength
- Drag brake to control payout
- Rod is marked in 5' increments
- Includes end ferrule and pulling eye
- Accessory Kit included (9-25-AK)

Jameson #	Description
6-14-300M	300' x 1/4"
6-14-500M	500' x 1/4"



Jameson #	Description
9-25-300M	300' x 3/8"
9-25-400M	400' x 3/4"

Good Buddy Fiberglass Conduit Rodder

- Unit fold to 10" width for carrying into manholes
- Reel can be detached from frame
- Frame handle for easy transport
- Friction brake and safety roller feed
- Operates vertically or horizontally
- Accessory Kit included (9-25-AK)



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



7/16" Cobra Rod
3/8"-16 End Fitting
45" Cage

Condux #	Length	Replacement Rod No.
08083820	200'	08086320
08083830	300'	08086330
08083840	400'	08086340
08083850	500'	08086350
08083860	600'	08086360
08083870	700'	08086370
08083880	800'	08086380
08083890	900'	08086390
08083810	1000'	08086310
08083811	1100'	08086311
08083812	1200'	08086312
08083813	1300'	08086313
0803814	1400'	08086314
08083815	1500'	08086315

3/16" Mini-Cobra Rod
#12-24 End Fitting
16" Cable

Condux #	Length	Replacement Rod No.
08072405	50'	08073605
08072410	100'	08073610
08072415	150'	08073615
08072420	200'	08073620
08072425	250'	08073625
08072430	300'	08073630

5/16" Python Rod
3/8"-16 End Fitting
30" Cage

Condux #	Length	Replacement Rod No.
08084320	200'	08082320
08084330	300'	08082330
08084340	400'	08082340
08084350	500'	08082350
08084360	600'	08082360
08084370	700'	08082370
08084380	800'	08082380
08084380	900'	08082390
08084310	1000'	08082310

9/16" Python Rod
3/4"-10 End Fitting
45" Cage

Condux #	Length	Replacement Rod No.
08083220	200'	08075720
08083230	300'	08075730
08083240	400'	08075740
08083250	500'	08075750
08083260	600'	08075760
08083270	700'	08075770
08083280	800'	08075780
08083290	900'	08075790
08083210	1000'	08075710



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



**1/4" Mini-Cobra Rod
5/16"-18 End Fitting
24" Cage**

Condux #	Length	Replacement Rod No.
08072510	100'	08073710
08072515	150'	08073715
08072520	200'	08073720
08072525	250'	08073725
08072530	300'	08073730
08072535	350'	08073735
08072540	400'	08073740
08072545	450'	08073745
08072550	500'	08073750
08072555	550'	08073755
08072560	600'	08073760



**5/16" Cobra Rod
3/8"-16 End Fitting
30" Cage**

Condux #	Length	Replacement Rod No.
08083720	200'	08079120
08083730	300'	08079130
08083740	400'	08079140
08083750	500'	08079150
08083760	600'	08079160
08083770	700'	08079170
08083780	800'	08079180
08083790	900'	08079190
08083710	1000'	08079110

**7/16" Python Rod
3/8"-16 End Fitting
45" Cage**

Condux #	Length	Replacement Rod No.
08083920	200'	08086520
08083930	300'	08086530
08083940	400'	08086540
08083950	500'	08086550
08083960	600'	08086560
08083970	700'	08086570
08083980	800'	08086580
08083990	900'	08086590
08083910	1000'	08086510
08083911	1100'	08086511
08083912	1200'	08086512
08083913	1300'	08086513
0803914	1400'	08086514
08083915	1500'	08086515



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Columbus McKinnon #	Number of Chains	Lift	Weight Capacity	Min. Distance Between Hooks	Handle Length	Min. Increment	Weight
AG	One	56"	1,500 lbs.	13"	18-3/4"	.624/.313"	14 lbs.
ATG	Two	60"	3,000 lbs.	15"	18-3/4"	.313/.156"	17 lbs.
FTG	Two	60"	6,000 lbs.	16"	27-5/8"	1.0/.5"	25 lbs.
ZG-6	Four	53"	12,000 lbs.	25"	33-5/8"	0.25"	59 lbs.

G Series Coffing Hoist, Ratchet Lever

- Riveted construction for tamper-resistance
- Handle stops prevent handle from spinning if it's accidentally released by operator
- Free chaining mechanism allows quick and easy take-up and positioning of slack chain
- Snap hook and links allow the operator to convert unit to next small capacity to give longer lift and faster operation, snap hooks acts as an end stop




Hastings #	Length of Fiberglass	Weight
3413	6"	2.3 lbs.
3414	12"	2.5 lbs.

Strap Hoist Isolating Links

- Strap hoist isolating links are designed to provide extra protection when used with strap hoists on primary voltages
- Isolating links can be used with most strap hoists
- Standard swivel eye one end and safety hook
- Load limit-4,000 lbs.
- Lightweight

Ratchet Chain Hoists, Link Chain Style

- High-strength 20" handle and sheave housings are heat-treated aluminum
- All working parts fully enclosed in housing unit
- High-strength alloy steel chain
- Forged steel load hooks with automatic spring-loaded latches
- Two-way handle
- Rounded stop on handle end
- 5-1/2' standard lift distance

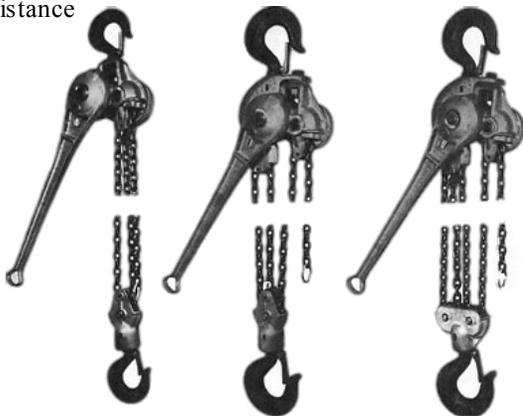

3 Ton

4-1/2 Ton

6 Ton

Chance #	Rating	Handle Pull at Rating	Hook-to-Hook Minimum	Weight
C3090438	3/4 Ton	65 lbs.	11"	14 lbs.
3011S	1 Ton	90 lbs.	11"	14 lbs.
C3090439	1-1/2 Ton	60 lbs.	16"	22 lbs.
4012	2 Ton	90 lbs.	11"	28-1/2 lbs.
C3090440	3 Ton	60 lbs.	19-3/4"	30-1/2 lbs.
C3090441	4-1/2 Ton	70 lbs.	24-1/2"	47 lbs.
C3090442	6 Ton	70 lbs.	24-1/2"	50 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Rubber Glove Style



Hotstick Style



CHANCE

Convertible Strap Hoists, Mechanical

- For rubber-glove work, select hoist with plastisol cap on handle end
- For hotstick operations, select hoist with swivel eye on the handle
- Designed for heavy-duty applications
- Automatic spring-loaded latches on 360° swivel forged-steel hooks
- Heat-treated aluminum-alloy frame
- Interlocking pawls
- Safety-orange 30" x 1-1/4" Epoxiglas insulated handle

Chance #	Rating	Description	Standard Lift Distance (high)	Standard Lift Distance (low)	Weight
PSC3090451	3/4-1-1/2 Ton	Rubber Glove Style	3'	6'	12.5 lbs.
PSC3090452	3/4-1-1/2 Ton	Hotstick Hooks & Handle Style	3'	6'	13.5 lbs.

Nylon Strap Ratchet Hoists, Mechanical

- For rubber-glove work, select hoist with plastisol cap on handle end
- For hot-stick operations, select hoist with swivel eye on handle end
- All models have hot-stick rings on hooks and latches
- Single strap of 1-ton units reaches and lifts farther
- 2-Ton units employ a sheave-mounted hook in a double-strap bucket

Chance #	Rating	Description	Standard Lift Distance	Handle Length	Weight
PSC3090323	1 Ton	Rubber Glove Style	5'9"	22"	12.75 lbs.
PSC3120000	2 Ton	Rubber Glove Style	3'9"	36"	14.5 lbs.



CHANCE

LITTLE MULE



Little Mule #	Description
322B	1-1/2 Ton Strap Hoist, 14' and 7' Lift
322DB	1-1/2 Ton Strap Hoist with Hot Stick Rings, 14' and 7' Lift
344B	2 Ton Strap Hoist, 11' and 5-1/2' Lift
344DB	2 Ton Strap Hoist with Hot Stick Rings, 11' and 5-1/2' Lift

Series 322B and 344B Lineman's Lever Hoist

- Hot stick-type gate latch on all hooks
- Hot stick rings on all hooks and control surfaces
- Rated load capacities of 1,500 and 2,000 lbs. single line; 3,000 and 4,000 lbs. double line
- Overload protection bending handle
- Enhanced reversing mechanism with double interlocking pawls
- 360° swiveling hooks equipped with latches for positive load engagement
- Compact aluminum alloy frame with double flanged strap drum and interrogated hook point
- All stainless steel springs and shafts
- All rotating shafts mounted on bronze bushings
- Meets or exceeds minimum 4:1 design factor and all requirements of ASME/ANSI standard B-30.21



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Series 6000A Lineman's Lever Hoist

- Swivel-type gate on all hooks
- Rated load capacities of 6,000, strongest web strap puller available
- Extra large superior grade webbing with double side plate housing design
- Positive load holding with double interlocking pawl mechanism
- 4:1 Gear reduction for low handle effort
- Meets or exceeds minimum 4:1 design factor and all requirements of ASME/ANSI standard B-30.21

Little Mule #	Description
6000DA	3 Ton Strap Hoist, 5' Lift with Hot Stick Rings



Lineman's Strap Hoist


- Hot stick-type gate latch on all hooks
- Hot stick rings on all hooks, control surfaces, and quick disconnect shaft
- Rated load capacities of 1,000 and 1,500 lbs. single line; 2,000 and 3,000 lbs. double line
- Overload protection bending handle
- 360° Swiveling hooks equipped with latches for positive load engagement
- Positive load holding with double interlocking pawl mechanism
- Cast aluminum and zinc alloy housings
- All stainless steel springs and shafts
- All rotating shafts mounted on bronze bushings
- Meets or exceeds minimum 4:1 design factor and all requirements of ASME/ANSI standard B-30.21



Little Mule #	Description
300A	1-1/2 Ton, 10' Strap Length, 20" Handle Length, Standard Hooks w/Safety Latches
300DA	3/4 Ton, 10' Strap Length, 20" Handle Length, Hot Stick Ring Hooks w/Safety Latch

Lug-All Medium Frame Web Strap Ratchet Hoist, Standard Latching Hooks

- Aluminum alloy frame
- Interlocking pawl systems
- Web strap stores on double flanged drum
- Reversible fiberglass handle
- Nylon web strap
- Standard quick release pulley block double reeved for full capacity
- Open construction
- Easily replaceable stress link gives warning of overload

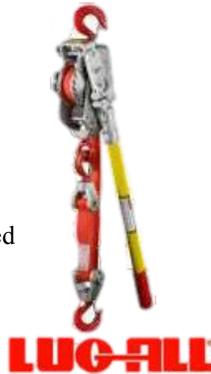

Lug-All Small Frame Web Strap Ratchet Winch Hoist, Standard Latching Hooks

- Aluminum alloy frame
- Interlocking pawl systems
- Web strap stores on double flanged drum
- Reversible fiberglass handle
- Nylon web strap
- Standard quick release pulley block double reeved for full capacity
- Open construction
- Easily replaceable stress link gives warning of overload



LUG-ALL

Lug-All #	Description	Capacity for Single Line	Capacity for Double Line
3-A	Strap Length: 11.5' Handle Length: 30" Weight: 14 lbs.	3/4 Ton Pull Distance: 19"-11'3"	1.5 Ton Pull Distance: 27"-5'1"
4-A	Strap Length: 10' Handle Length: 36" Weight: 15.5 lbs.	1 Tons Pull Distance: 19"-9'4"	2 Tons Pull Distance: 27"-4'1"

Lug-All #	Description	Capacity for Single Line	Capacity for Double Line
2-A	Strap Length: 10' Handle Length: 30" Weight: 10.25 lbs.	1/2 Ton Pull Distance: 16"-9'6"	1 Ton Pull Distance: 21"-4'5"
25-A	Strap Length: 8' Handle Length: 20" Weight: 10 lbs.	3/4 Ton Pull Distance: 16"-7'6"	1.5 Tons Pull Distance: 21"-3'5"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Standard Series Web Strap Ratchet Winch Hoist

- Load tested to 125% of rated capacity
- Double flanged drum keeps web strap from coming in contact with ratchet teeth
- Breakable stress link-alerts operator to an overload condition
- Reversible handle with two spare stress links
- Interlocking pawl mechanism
- Maintenance free bearings are lubed for life
- RFID traceability
- USA Made 360° swivel hooks are drop forged heat treated steel



2W10



3W08S



4W12

Lincoln Hoist

Lincoln Hoist #	Description
2W10	Strap Hoist, 1-Ton with 30" Handle
3W08S	Strap Hoist, 1-1/2-Ton with 20" Handle
3W08SY	Strap Hoist, 1-1/2-Ton, 20" Handle with Hot Stick Rings on Operating Levers Only
3W15Y	Strap Hoist, 1-1/2-Ton with Medium Frame and Hot Stick Rings on Levers Only, 6.2' Lift at Double Line and 14' Lift at Single Line
4W12	Strap Hoist, 2-Ton with 36" Handle
4W12Y	Strap Hoist, 2-Ton with 36" Handle and Hot Stick Rings on Operating Levers Only
4W12B	Strap Hoist, 2-Ton with 36" Handle and Hot Stick Rings on the Handle and Pawl Shafts



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Lewis #	Description
RDB-8x8-18	8' x 8' with 18 oz. Canvas



Rowdy's DirtBall Jobsite Debris Tarp

- Made of heavy-duty, rubberized canvas
- Equipped with lifting handles
- Rated for 1,000 lbs. of jobsite debris and dirt

Fiberglass Handle Cant Hook

- High strength forged steel hook
- 1-3/4" Diameter fiberglass handle is easily gripped when wearing gloves
- Supplied with heavy-duty base cap to protect butt end
- Protective metal sleeve on head eliminates wear
- Knuckle guard to protect hand if hook swings back to pole

Hastings #	Description
6705	Cant Hook with 36" Fiberglass Handle, 6.0 lbs.



Hastings #	Description
6856	Pole Cant Tool with Heavy-Duty Ratchet Binder and 6' Nylon Strap, 10.0 lbs.
6856-3	Pole Cant Tool with Heavy-Duty Ratchet Binder with 8' Nylon Strap, 10.2 lbs.
6856-5	Pole Cant Tool with Heavy-Duty Ratchet Binder and 10' Nylon Strap, 10.4 lbs.


Pole Cant Tool

- For turning fiberglass, concrete, metal and wood poles during installation
- Nylon strap is coated to grip pole surface
- Heavy duty ratchet has extra wide handle for easy operation when wearing gloves
- Poles can be turned in both positions without reinstalling the tool
- 48" Long x 2" diameter fiberglass handle with solid foam core

Alloy Steel Timber Lifting Tong

- Certified and proof tested alloy products should be used for overhead lifting
- Dixie Industries upset forges round alloy steel for optimum tensile strength and durability
- Proof loaded to two times the working load limit then affixed with a permanent metal identification tag
- Lifting tongs are supported by either screw pin shackle or a nut and bolt safety shackle with a ring
- Tong shape has been designed to provide a sure grip on poles and logs
- Painted bright orange for job site identification

Dixie #	Diameter	Max Opening
40008	3/4"	16"
40218	1"	20"
40228	1"	25"

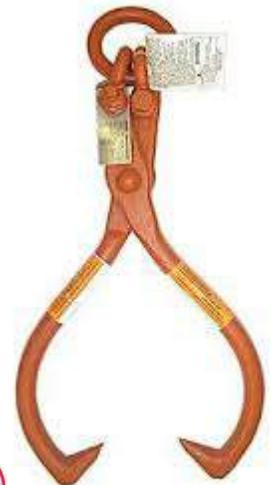

Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Dixie #	Diameter	Handle Length
06250	2-1/2"	4-1/2'
06252	Replacement Handle	4-1/2'
06260	2-1/2"	5'
06262	Replacement Handle	5'
06380	2-3/4"	6'
06382	Replacement Handle	6'

Cant Hook with Extension Toe Ring

- Manufactured from the highest quality materials
- Handles are top quality straight grain white mountain hickory hardwood, kiln dried to 18% moisture content, then precision cut to an exact fit
- Duckbill hooks are drop forged with the bills ground to a fine point
- Clasps and extension toe rings are ductile iron castings for a long lasting service

Duckbill Hook with Driven Pick

- Straight grain white mountain hickory hardwood handle
- Drop forged high carbon steel hooks
- Drawn carbon steel socket
- Pick forged from high carbon steel
- Socket held in place with special retaining tab forged into the pick

Dixie #	Diameter	Handle Length
00250	2-1/2"	4-1/2'
00252	Replacement Handle	4-1/2'



OshKosh #	Description	Weight
4241	18" x 15" x 9"	23 lbs.

E-Zup Pole Cradle

- Used to lift poles into position for framing
- Aluminum
- Handles poles up to 19" diameter

Pike Pole

- Finished fir handles
- Aid in the field using pole line tools
- Used to spike a hole
- Malleable iron ferrule
- Special steel pike with upset face

OshKosh #	Description	Weight
820F	2-1/2" x 16'	15 lbs.



OshKosh #	Description	Weight
134	2-1/4" x 4', 479 Hook	8 lbs.

Peaveys

- Designed for balance and easy handling
- Hardwood handles
- Hooks and pikes are high-carbon steel
- Stop prevents hook from falling back onto the handle



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Round Crow and Digging Bar

- High carbon steel
- 2" Chisel on one end
- Pointed on other end

OshKosh #	Description	Weight
1065	1-1/8" x 8'	27 lbs.



OshKosh #	Description	Weight
199A	2-1/4" x 4', 479 Hook	7 lbs.
199	2-1/2" x 4', 479 Hook	9 lbs.
200A	2-1/4" x 4-1/2', 479 Hook	8 lbs.
200	2-1/2" x 4-1/2', 480 Hook	9 lbs.
201	2-1/2" x 5', 480 Hook	9 lbs.

Cant Hooks

- Hard maple wood handles
- High carbon steel hooks heat treated for strength and durability
- Hook stop to prevent the hook from falling back and damaging the handle
- Hook 479 (3-1/2" x 8" duckbill), Hook 480 (3-1/2" x 9" duck bill)



Tamp Bars

- Wood handled, heavy weight straight steel boot

OshKosh #	Description	Weight
1055	8' Tamp Bar	9 lbs.



OshKosh #	Description	Weight
2051	Post Hole Digger, 8' Solid Handle	15 lbs.
2051A-8	8' Solid Replacement Handle	8 lbs.

Solid Handle Post Hole Digger

- Special alloy steel welded blades
- Digger blades make 6" circle
- Handles start together and are then pulled apart when in use



Split Handle Post Hole Digger

- Special alloy steel welded blades
- Digger blades make 6" circle
- Used with a front to back movement

OshKosh #	Description	Weight
2050	Post Hole Digger, 8' Split Handle	14 lbs.
2050A-8	8' Split Replacement Handle	8 lbs.



OshKosh #	Description	Weight
2034	9', 10" Blade, Ash Handle	9 lbs.
2034-6	9', 6" Blade, Ash Handle	9 lbs.

Straight Master Shovel

- Ash hardwood handles
- Carbon steel blades with boron
- Handles are marked with footage to indicate depth of hole



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Expanding and Tamping Bar

- Curved head distributes weight of the bar evenly around the anchor rod
- Hook wraps around the anchor rod
- Effectively used for tamping in soil above the installed anchor
- Base casting attached directly to the fiberglass handle
- Length: 10'

Chance #	Description
C3020003	Tamping Bar



CHANCE

CHANCE



Chance #	Description
C3030044	Shear Pin Torque Indicator
C3030045	1 Carton of Shear Pins (Approx 1,700 Pins)
T3031420	1 Box of Shear Pins (Approx 510 Pins)

Shear Pin Torque Limiter

- For installing torques up to 10,000 ft-lb.
- Offers protection for anchors and installing tools by disconnecting power when the installing torque reaches a pre-selected level
- Useable in very rocky soil
- Does not require special storage or handling
- Top and bottom each has 6 holes tapped 1/2"-13 on a 5-1/4 bolt circle
- Each shear pin provides 500 ft-lb. of torque

Chance #	Description
C1021583 7'	Standard Drive-End Wrench Installs 8,000 ft-lb and 10,000 ft-lb Tough One Anchors, 4,000 ft-lb and 6,000 ft-lb PISA Anchors
C1020595 3-1/2'	
C3031064 7'	Hybrid Drive-End Wrench Installs 10,000 ft-lb Tough One Anchors, 6,000 ft-lb PISA 6 Anchors and 7,000 ft-lb PISA 7 Anchors
C3031063 3-1/2'	
C630027	3-1/2' Extension, Fits Std & Hybrid Drive-End Wrenches
C630028	7' Extension, Fits Std & Hybrids Drive-End Wrenches

Standard and Hybrid Drive-End Wrenches



CHANCE

Tough One Drive-End Wrenches

CHANCE

Chance #	Description
C3030983	7' Installs 10,000 ft-lb Tough One Anchors and all 1-1/2" Core Anchors
C3030982	3-1/2' Installs 15,000 ft-lb Large Hub, Tough One Anchors
C3030987	3-1/2' Extension for Tough One Drive-End Wrench
C3030988	7' Extension for Tough-One Drive-End Wrench



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Bolt Circle Adapter for Installing SS & RR Anchors

- Requires appropriate Kelly bar adapter (sold separately) and limited to 10,000 ft-lb.

Chance #	Description
T3030166	One 1/2" x 5-1/4" Bolt Circle, 6 Hole to 5/8" x 7-5/8" Bolt Circle 12 Hole



CHANCE

Adapters for Installing SS or RR Anchors

- Slide into locking dog adapter and are retained by spring loaded dogs
- Each comes with bolts, nuts and lockwashers
- Requires appropriate kelly bar adapter (sold separately)

Chance #	Description
C3030020	SS5/SS150/RR Drive Tool, Fits Standard Locking Dog Assembly
C3031035	SS5/SS150/RR Drive Tool, Fits Tough One Locking Dog Assembly
T3031403	SS175 Drive Tool, Fits Tough One Locking Dog Assembly
C3031077	SS200 Drive Tool, Fits Tough One Locking Dog Assembly



CHANCE

Tough One Locking Dog Assemblies

- For installing torques up to 15,000 ft-lb.
- Has twelve holes for 5/8" bolts on a 7-5/8" bolt circle
- Comes with twelve 5/8" Grade 2 bolts, nuts and lock washers

Chance #	Description
C3030981	Complete Tough One Locking Dog Assembly
C3031026	Repair Kit



CHANCE

Adapters for Installing SS or RR Anchors

- Includes proprietary alignment window
- Each come with bolts, nuts and lockwashers
- Requires appropriate kelly bar adapter (sold separately)

Chance #	Description
639001	SS5/SS150/RR Drive Tool, Six 1/2" Holes on 5-1/4" Bolt Circle
C3030195	SS175 Drive Tool, Twelve 5/8" Holes on 7-5/8" Bolt Circle
C3030201	SS200 Drive Tool, Twelve 5/8" Holes on 7-5/8" Bolt Circle



CHANCE

Tough One Kelly Bar Adapters with Bent Arm Pin

- For installing torques up to 15,000 ft-lb
- Has 12 holes for 5/8" bolts on a 7-5/8" bolt circle
- Comes with twelve 5/8" Grade 2 bolts, nuts, lock washers and bent arm pin with coil lock
- Hex bar shape

Chance #	Description
C3030936	2-1/2" Hex
C3030937	2-5/8" Hex
C3030940	3" Hex
C3030958	3" Square



CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

CHANCE



Chance #	Description
C3030069HD	Complete Standard Locking Dog Assembly
C3030070	Locking Dog Replacement Kit Includes Parts Needed to Replace Both Locking Dogs

Standard Locking Dog Assembly

- For installing torques up to 10,000 ft-lb.
- Has six holes for 1/2" bolts on a 5-1/4" bolt circle
- Comes with six 1/2" Grade 5 bolts, nuts and lock washers

Standard Kelly Bar Adapters with Bent Arm Pin

- For installing torques up to 10,000 ft-lb.
- Has six holes for 1/2" bolts on a 5-1/4" bolt circle
- Comes with six 1/2" Grade 5 bolts, nuts, lock washers and bent armpin with coil lock
- Hex bar shape

Chance #	Description
630013	2"
630011HD	2-1/2"
630012HD	2-5/8"



CHANCE

Looking for something you don't see in the catalog? Special Fleet Service has inventory and access to thousands of products, call us today and let us help you order exactly what you need to get the job done.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Chance #	Description
C6000785	Cutout Grounding Clamp
C6000862	Cutout Grounding Clamp w/L Stud
C6000841	"L" Stud Terminal Only

Cutout Grounding Clamps

- Bronze clamp used to ground bottom hinge contact on cutouts
- Can be installed with or without grounding cable
- Clamp's drilled terminal accepts threaded-stud cable ferrules
- Also accepts threaded L-stud and T-stud terminals, 3/4" diameter bronze

CHANCE



Apparatus Grounding Clamps

- For restricted-space applications and as a truck grounding system
- Wide range of switching equipment applications
- Clamp bodies, eye screws and ball-studs are bronze alloy
- Continuous current: 400 amps

CHANCE

Chance #	Description	ASTM Grade/Class	Mainline Range Min/Max
C6002101	Apparatus Grounding Clamp, Tapped for 5/8-11 UNC Threaded Ferrule	5/A	#2 to 4/0 with Threaded Ferrule
C6002300	Apparatus Grounding Clamp with Pressure Terminal	5/A	#2 to 4/0 with Pressure Terminal



CHANCE

Chance #	ASTM Grade/ Class	Mainline Range Min/Max
G3605-1	5/A	#6 Sol Cu. .162" to 2" OD Bus

Grounding Clamp

- Aluminum body
- Smooth jaws
- Bronze eye screw
- Continuous current AMPS 4000
- Weight: 1.715 lbs.

All-Angle Grounding Clamps

- Aluminum bodies with serrated jaws
- For installation ease, jaws pivot 75° left or right

Chance #	Description	ASTM Grade/Class	Mainline Range Min/Max
G42291SJ	Pressure Terminal All-Angle Grounding Clamp	5/B	#2 Cu .258" to 954 kcmil ACSR 1.196"
C6001732	All-Angle Grounding Clamp Tapped for 5/8-11 UNC Threaded Ferrule	5/B	#2 Cu .258" to 2-1/2" IPS 2.88"



CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Tower and Flat-Face Grounding Clamps

- Continuous current: 400 RMS Amps

Chance #	Description	ASTM Grade/Class	Mainline Range Min/Max
C6001735	Aluminum Body, Serrated Jaws, Bronze Eyescrew w/Fine Threads, Tapped for 5/8-11 UNC Threaded Ferrule	3/B	1/8" to 1-1/2" Angles, 1-1/2" Flat
T6001798	Aluminum Body, Serrated Jaws, Bronze T-Handle w/Acme Threads, Tapped for 5/8-11 UNC Threaded Ferrule	3/B	1/8" to 1-1/2" Angles, 1-1/2" Flat
C6002231	Bronze Body, Serrated Jaws, Bronze T-Handle w/Acme Threads Drilled for 5/8-11 UNC Threaded Ferrule, Tower & Flat-Face Grounding Clamp	5/B	1/8" to 1-1/2" Angles, 1-1/2" Flat
C6002232	Bronze Body, Serrated Jaws, Bronzed Eye screw w/Acme Threads, Drilled for 5/8-11 UNC Threaded Ferrule, Tower & Flat-Face Grounding Clamp	5/B	1/8" to 1-1/2" Angles, 1-1/2" Flat
G33633SJ	Aluminum Body, Serrated Jaws, Bronze Eyescrew w/Fine Threads, Bronze Pressure-Type Terminal, Tower & Flat-Face Grounding Clamp	3/B	1/8" to 1-1/2" Angles, 1-1/2" Flat
G33634SJ	Aluminum Body, Serrated Jaws, Bronze T-Handle w/Fine Threads, Bronze Pressure-Type Terminal, Tower & Flat-Face Grounding Clamp	3/B	1/8" to 1-1/2" Angles, 1-1/2" Flat



C6001735



T6001798



C6002231



C6002232



G33633SJ



G33634SJ

CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

C-Type Grounding Clamps

- Continuous current: 400 RMS Amps

Chance #	Description	ASTM Grade/Class	Mainline Range Min/Max
C6002271	Bronze Body, Smooth Jaws, Bronze Eyescrew with Fine Threads, Tapped for 5/8-11 UNC Threaded Ferrule, C-Type Grounding Clamp	5/A	#6 Sol Cu .162" to 1033 kcmil ACSR 1.25"
C6002276	Aluminum Body, Serrated Jaws, Bronze Eyescrew with Acme Threads, Bronze Pressure-Type Terminals, C-Type Grounding Clamp	5/B	#8 Sol Cu .128" to 1033 kcmil ACSR 1.25"
T6002708	Aluminum Body, Serrated Jaws, Bronze Eyescrew with Acme Threads, Tapped for 5/8-11 UNC Threaded Ferrule, C-Type Grounding Clamp	5/B	#8 Sol Cu .128" to 1033 kcmil ACSR 1.25"
C6001743	Aluminum Body, Smooth Jaws, Bronze Eyescrew with Fine Threads, Tapped for 5/8-11 UNC Threaded Ferrule, C-Type Grounding Clamp	5/A	#6 Sol Cu .162" to 1000 kcmil Cu 1590 kcmil ACSR 1.50"
C6002281	Aluminum Body, Smooth Jaws, Bronze Eyescrew with Acme Threads, Bronze Pressure-Type Terminal, C-Type Grounding Clamp	5/A	#6 Sol Cu .162" to 2" OD Bus
C6002255	Aluminum Body, Smooth Jaws, Bronze Eyescrew with Acme Threads, Tapped for 5/8-11 UNC Threaded Ferrule, C-Type Grounding Clamp	5/A	#6 Sol Cu .162" to 2" OD Bus
T6000658	Aluminum Body, Smooth Jaws, Bronze Eyescrew with Acme Threads, Drilled for 5/8-11 UNC Threaded Ferrule, C-Type Grounding Clamp	5H/A	#6 Sol Cu .162" to 2" OD Bus



C6002271



C6002276



C6002281



C6002255



T6002708



T6000658

CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Snap-On (Duckbill-Type) Grounding Clamps

- Continuous current: 400 RMS Amps

Chance #	Description	ASTM Grade/Class	Mainline Range Min/Max
C6001734	Aluminum Body, Smooth Jaws, Bronze Eyescrew with Fine Threads, Tapped for 5/8-11 UNC Threaded Ferrule, Snap-On Grounding Clamp	5/B	#6 Sol Cu .162" to 566 kcmil Cu 900 kcmil ACSR 1.162"
C6000434	Aluminum Body, Serrated Jaws, Bronze Eyescrew with Fine Threads, Bronze Pressure-Type Terminal Snap-On Grounding Clamp	5/B	#6 Sol Cu .162" to 950 kcmil Cu 1510 kcmil ACSR 1.506"
C6000197	Aluminum Body, Serrated Jaws, Bronze Eyescrew with Acme Threads, Tapped for 5/8-11 UNC Threaded Ferrule, Snap-On Grounding Clamp	5H/B	#6 Sol Cu .162" to 950 kcmil Cu 1510 kcmil ACSR 1.506"



C6001734



C6000197

CHANCE

Aluminum Grounding Clamps

Salisbury #	Description	ASTM Grade/Class	Main Line Range	Continuous Current Rating
2553	1.66" Aluminum Duck Bill Clamp, Spring Loaded, "V" Thread	5/B Serrated Jaw	1590 MCM ACSR to #6, 1.65"-1.16"	400 RMS Amps, 60 HZ
1895	1.5" Aluminum "C" Clamp w/Flat Lower Jaw, ACME Thread, Eye w/Strain Relief Sleeve	5/B Serrated Jaw	1431 MCM ACSR To #6	400 RMS Amps, 60 HZ
78000	Pin Threaded, Stainless Steel Eye w/Contact Stud	5/A Smooth Jaw	.125"-1.63"	



2553



1895



78000

SALISBURY

by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Grade 5H Clamps

- Meets requirements of ASTM F855, Table 2
- Rated for increased asymmetrical currents
- For 4/0 copper grounding cable, 47kA for 15 cycles; X/R=30

SALISBURY
by Honeywell

Salisbury #	Description	ASTM Grade/Class	Main Line Range	Continuous Current Rating
4295	2.4" Bronze "C" Clamp w/Flat Smooth Lower Jaw, Acme Thread, Eye	5H/A	2.0" IPS to #6, 2.4"-.16"	400 RMS Amps 60 Hz
2991	6.62" Adjustable Aluminum "C" Clamp for Round, Square, Rectangle or "H" Section Substation Buses, w/Flat Lower Jaw, Acme Thread, Eye	5H/A	6.12" IPS, 6.62"-.4"	400 RMS Amps 60 Hz
21953	3.5" Aluminum "C" Clamp for Substation Buses, Acme Thread, Eye Smooth Jaw w/Flat Lower Jaw	5H/A	3.0" IPS to #6, 3.5"-.16"	400 RMHS Amps 60 Hz
20882	Aluminum 2 "C" Clamp w/Curved Serrated Lower Jaw, Eye	5H/B	3,000 MCM ACSR to #6, 2"-.16"	400 RMS Amps 60 Hz
21074	Aluminum 2 "C" Clamp w/Curved Smooth Lower Jaw, Eye	5H/A	3,000 MCM ACSR to #6, 2"-.16"	400 RMS Amps 60 Hz
2567	Heavy-Duty Bronze "C" Type Flat Jaw Clamp for Flats & Angles, Serrated Jaw	5H/B	Angles & Flats: 2.5"-4" WX, Rounds: .25"-.75" Tap Size 5/8"-11 UNC Max Cable Size 4/0 Type V Compression Ferrules	
22675	1" Ball Stud "C" Clamp w/Strain Release	5H/A	1.5"-.16"	400 RMS Amps 60 Hz



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Substation Ground Clamps

- Hanger studs enable substation maintenance crews to utilize their portable grounds on large bus by providing a fault current rated hanger stud as part of the clamp

Hastings #	Description
21056	Bronze, Grade 5, 1-1/4" -5" OD Main Line Range
21057	Aluminum, Grade 5, 1/0 STR .398"-6.625" Diameter Main Line Range



Hastings #	Description
13765	Clear, Medium Range to 556 ACSR
13768	Clear, Large Range to 954 ACSR

Mechanical Jumper Clamps

- Thrust bearing design provides low friction for tightening clamp
- Bronze clamping rings have serrated contact surface to insure good electric contact with conductors
- Grip tabs are molded in for easy gripping with rubber gloves
- Rated for 400A continuous current maximum rating (dependent on the rating of the jumper cable used with the clamps)



Duckbill Ground Clamp

- Spring-loaded, Snap-on Design
- Aluminum Body
- Bronze Eye Screw with Acme Threads
- Smooth Jaws
- Stainless Steel Cable Clamp
- Utilized bolted terminal connection

Hastings #	Description
10478	Meets or Exceeds ASTM 885 Standards



Salisbury #	Description
1785	#6 Solid to 477 ACSR
2115	#6 Solid to 954 ACSR

Mechanical Jumper Clamps

- Clear plastic jumper clamps are compact, lightweight and virtually unbreakable
- Transparency allows easy inspection of the ferrule and cable inside of the handle
- Body and jaw are made from copper based alloy



Ground Clamp

- Bolted terminal
- Weight: 3.5 lbs.

Hastings #	Description	Max. Jaw Opening	Max. Size Cable
9153CC	Eyescrew	1-1/2"	4/1/2000



Insulated Jumper Holder

- Designed to provide the lineman safety when installing and removing energized jumpers
- Allows linemen greater control with all jumpering requirements
- Can be installed with all standard shotgun sticks or rubber gloves

Hastings #	Description
3477	Fiberglass, 12" Shaft, 1/2" Hanger Bar



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Copper Unshrouded Ferrules

- Designed for use with all grounding clamps that feature pressure terminals including the 1" duckbill and 1.5" flat jaw clamp
- Crimped on the conductor strands only
- 99.5% pure copper

Salisbury #	Description
24421	1/0, Strand Die Codes: 50
24422	2/0, Strand Die Codes: 60
24423	4/0, Strand Die Codes: 66



SALISBURY
by Honeywell



SALISBURY
by Honeywell

Salisbury #	Grade	Size
2022	1	#2
2023	2	1/0
2024	3	2/0
2025	5	4/0

Threaded Unshrouded Grounding Ferrule

- Provides low resistant connection to cable strands with threaded stud that screws into a clamp
- Manufactured with a 5/8-11 UNC threaded stud

CHANCE



Support Stud

- Can be installed on most ground clamps
- Replaces restraining strap immediately below terminal
- Serves as a mechanical parking stand for a second clamp

Chance #	Description
G3626	Stud for Rear Mount

SALISBURY

by Honeywell



Salisbury #	Description
21190	Ball Stud/C Clamp w/Strain Relief Sleeve
21277	Ball Stud/C Clamp w/o Strain Relief Sleeve
21191	4.38" Short Ball Stud
21192	6.13" Long Ball Stud
24082	4" Internal Thread Ball Stud
21236	Cover for Ball Stud

Ball & Socket System and Ball Studs

- Universal clamp that can be used as 1" ball stud and 1-1/2" C clamp
- ASTM Grade 5
- Continuous current rating (amps, RMS, 60 Hz): 400
- Ball studs allow for variable angle accessibility



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Ball Studs

- For restricted-space applications and as a truck-grounding system
- Delivers a high-current rating usually associated with only large clamps
- Applies to a wide range of switching equipment

Chance #	Description
C6002102	4-1/4" Overall Length, 5/8" Diameter Ball Stud
T6002364	7" Overall Length, 5/8" Diameter Long Ball Stud



CHANCE

Grounding Stud Cover

- Non-conductive cover
- Not intended for personnel protection and should not be considered as insulative cover-up equipment
- Resilient ozone/corona-resistant thermo-plastic elastomer does not absorb water
- Resists aging/checking and retains high-visibility orange color
- Snap-fit keeps cover in place
- 5/8" ID Loop at top permits hot-line tools to "pop" it on and off



CHANCE

Chance #	Description
C4060416	Grounding Stud Cover

Cluster Support, 1-Terminal Type

- Hangs grounding sets on the pole to facilitate lifting clamps
- Accepts plain ferrules on #2 to 4/0 grounding cable
- Copper bar length is 11"

Chance #	Description
C6000152	Ground Cluster Support



CHANCE

Cluster Bar

- Compact 5" aluminum-alloy bar (5/8" diameter) accepts C-type or duckbill clamps
- For phase-to-phase grounding technique
- Adjustable wheel binder and 36" chain for pole applications
- Hook style for attachment to tower angles



Chance #	Description
T6001549	Pole-Mount Grounding Cluster Bar

Temporary Ground Rod

- Screw ground rod provides a temporary ground
- For when a system ground is not available
- Reusable ground rod is copper-clad steel
- Helix and handle are bronze

Chance #	Description
G3370	Screw Ground Rod



CHANCE

CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Chance #	Description
C6002989	58" x 58" Kit
C6002990	58" x 120" Kit
C6002991	120" x 120" Kit
C6002850	58" x 58" Mat Only
C6002851	58" x 120" Mat Only
C6002852	120" x 120" Mat Only

Personal Protective Ground Grid, Pre-Packaged Kit

- For standing on during various energized and de-energized work practices
- Consists of a high-capacity tinned-copper-braid cable sewn in a grid pattern onto a vinyl/polyester fabric
- Includes:
 - Ground grid with long ball stud and illustrated instructions
 - Ground set
 - Storage bag



Hastings #	Description
6610	Yellow Mat, 58" x 58"
6615	Yellow Mat, 58" x 120"
6620	Yellow Mat, 120" x 120"
6610-NS	Black Mat, Non-Skid, 58" x 58"
6615-NS	Black Mat, Non-Skid, 58" x 120"
6620-NS	Black Mat, Non-Skid, 120" x 120"



Ground Mat

- Portable mat provides a method to establish an equal potential zone for multiple grounding applications
- Vinyl polyester fabric, with high capacity, tinned-copper braid sewn into a grid pattern
- The copper grid connects to a 6" termination stud on the corner of the mat
- The ground mat is then bonded to the equipment being worked on
- Reversible, easy to store, easy to clean with standard hose pressure



Estex #	Description
2629	25-1/2" x 28-1/2"

Grounding Cluster Bag

- Red vinyl coated nylon with reinforced bottom
- Inside pocket 20"L x 5"H
- Thick web handles
- Protects grounds and jumpers from moisture, dirt, oil and other contaminants

Grounds Flag

- Hi-Visibility orange grounds flag with two reflective strips on front and back for easy visibility when working at night
- Hook and loop straps for a secure attachment
- Wire attachment for hot line clamp on top and PVC stiffener on bottom
- Includes a space to write truck/radio number and service location

Buckingham #	Description
845403V	17-1/2"H x 16-1/2"W



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

SALISBURY

by Honeywell




Grounding Jumpers

- Made of extra flexible soft drawn #30 AWG copper
- Yellow jackets shown in table, also available in black or clear

Salisbury #	Size	Strand Dia.	Jacket	Short Circuit Withstand Amps, RMS, 60HZ		Continuous Current
				15 Cycles	30 Cycles	Amps, Rms, 60HZ
2136	#2-665W	.35"	.50"	1450	1000	200
2137	1/0-1064W	.45"	.62"	21000	15000	250
2138	2/0-1330W	.49"	.65"	27000	2000	300
2139	4/0-2109W	.62"	.83"	43000	3000	400

Insulated Jumper Cable

- Lightweight, resistant to oil, heat, moisture, ozone and abrasion
- Embossed every three feet with the conductors size and kV rating

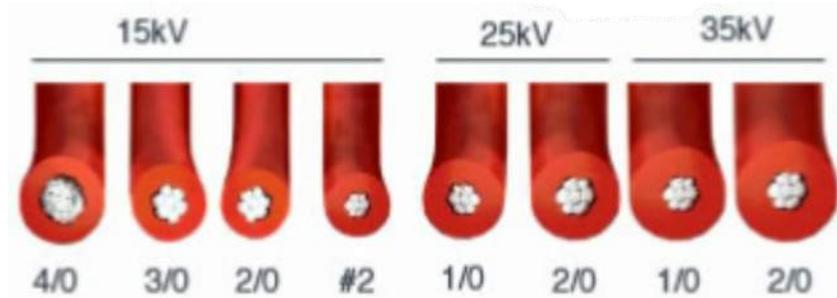

SALISBURY

by Honeywell

Salisbury #	Size & Str. Awg	KV Rating Ø to Ø	Nominal Ø to GRD	Str. Dia.	O.A. Dia.	Max Amps Continuous
2756	2/0-427W	15	10	.456"	.90"	300
2757	4/0-437W	15	10	.592"	1.01"	400
21060	2/0-427W	25	15	.456"	1.1"	300
4370	2/0-427W	35	20	.48"	1.31"	300



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Tulsa #	Min/Max Arbor	Capacity
RT20	2 3/4"	3,000 lbs.
RT40	3 3/6"	4,500 lbs.

Tulsa Power Reel Thing

- Form pressed all steel construction
- Solid steel bar inserted into the tube assembly rather than common wire rope
- Reel weights supported by a solid core
- Bearing swivel assembly
- Treaded with a special anodizing process to prevent corrosion
- Grease port for periodic lubrication

Handline Hook

- Constructed from manganese bronze alloy for superior strength
- 600 pounds-maximum safe working load
- 3/4" Eye Opening
- 1" Throat Opening
- Weight: .5 lbs.

Hastings #	Description
P10060	5-1/2" x 3-1/8"



Buckingham #	Description
2406	Handline Hook

Headline Hook

- Reliable tool to raise and lower material at the work site
- Welded eye and formed hook is rated to 500 lbs.

Handline Carrier Hook

- Nylon handline carrier with a hole to easily secure it to the body belt with a bolt or zip tie
- Will straighten when approximately 14-18 lbs. of pressure is applied to allow the handline to pull free

Buckingham #	Description
2402	Handline Carrier Hook



Chance #	Description
C4000918	Triple Block without Becket
C4000919	Double Block with Becket

Glass Fiber Filled Nylon Rope Blocks

- Shells and sheaves made of high dielectric, fiber-filled natural nylon
- Shaft is silicon bronze and sheave bearings are oil-impregnated bronze
- For working-load considerations, blocks are rated as follows:
 - ❑ Single sheave blocks, max 2,000 lbs.
 - ❑ Double sheave blocks, max 3,500 lbs.
 - ❑ Triple sheave blocks, max 3,500 lbs.
- Dielectric rating in dry weather in 30,000 volts between bearing and mounting bolt nut
- Maximum rope size is 1/2"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Replacement Rope for Handline Block

- 1,000 lb. working load
- Safety orange
- Fiberglass reinforced nylon construction
- Opening body design for easy rigging
- 3" Sheave, 5/8" Rope capacity
- Swivel eye allows 360° rotation
- Pull pin with detent ball for easy opening and securing
- Weight: 1-1/2 lbs.

Eagle Line #	Description
HL-80B	80' in Length
HL-100B	100' in Length



Erin Rope #	SFS #	Diameter	Length	Min. Break Strength
PDTW 160600	1/2X600PLU	1/2"	600'	4,818 lbs.
PDTW 120600	3/8X600PLU	3/8"	600'	2,881 lbs.
PDTW 200600	5/8X600PLU	5/8"	600'	7,214 lbs.

3 Strand Poly-Dacron Combination Rope

- High intensity polyester fiber wrapped cover over polyolefin core yarns
- Good abrasion resistance and strength
- Meets ANSI & OSHA Standards for fall protection

Block & Tackle with Snap Hooks

- These are not occupational protective devices
- Not for human support
- Light, galvanized-steel shell blocks are fitted with snubbing hooks to hold the load
- Sheaves are strong, yet are lightweight aluminum alloy with all-bronze bushings
- Choice of forged hook No. 258 or swivel hook No. 259
- Hooks fit under insulator and engage pin on cross arm
- Maximum safe load: 750 lbs.
- Furnished with 25' of 3/8" rope
- No. 267 block with standard snap hook and a detachable drop-forged anchor hook (No. 258) on one end, and block No. 268 with eye and rope tie-off hook on other end
- No. H267 block with guarded snap hook and a detachable drop-forged anchor hook (No. 258) on one end and block No. H268 (with guarded snap hook, eye and rope tie-off hook) on other end

Klein Tools #	Description
1802-30	Block & Tackle with Standard Snap Hooks
1802-30S	Same as 1802-30 Except Supplied w/Detachable Swivel Anchor Hook (No. 259) Instead of Hook No. 258
H1802-30	Block & Tackle with Guarded Snap Hooks
H1802-30S	Same as H1802-30 Except Supplied w/Detachable Swivel Anchor Hook (No. 259) Instead of Hook No. 258
H1802-30S S/R	Same as H1802-30S but with Rope Spliced to No. H268 Block



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Buckingham #	Description
50061	Ox Block
50061A-4	Ox Block with 4" x 5/8" Adjustable Sling, Aluminum Carabineer
50061A-4/80	Ox Block with 4" x 5/8" Adjustable Sling, Aluminum Carabineer and 80' x 1/2" Handline Assembly

Ox Block

- Push button to open, swivel eye, friction bar and gate with audible clicks
- Rope snatch block with an integrated friction bar used for hurt man rescue, lowering loads, snubbing loads and raising loads
- Allows the rigging professional to handle loads with greater control
- Replaces standard handline blocks, parted blocks and various snatch blocks
- Has greater working load limits than blocks of similar size
- For synthetic ropes only, not to be used with wire rope or natural fiber ropes

Hand Line Blocks

- Block and sheave constructed of rugged nylon fiberglass reinforced high dielectric material
- Reinforced 1/2" diameter axle and swivel bearings
- 3" Sheaves-block can accommodate rope up to 5/8" diameter
- Provided with either side opening or closed block
- Blocks are rated with 3-1 safety factor
- Working load limit 1,000 lbs.

Hastings #	Description
3550	3" Sheave Block, Side Opening, Swivel Hook and Safety Snap
3551	3" Closed Sheave Block, Swivel Hook and Safety Snap



Klein Tools #	Description
267	Plain Block
H267	Plain Block, Nose Extends Over Keeper
268	Block w/Eye to Splice Line to Block & Rope Tie-Off
H268	Block w/Eye to Splice Line to Block & Rope Tie-Off, Nose Extends Over Keeper



Blocks

- Blocks without ropes and hooks
- Made of light, galvanized steel and aluminum alloy
- Sheaves have bronze bushings

Snap Hook

- General purpose forged snap hook with eye at 90° to opening
- Maximum safe load: 1,500 lbs.
- 1" Eye I.D.

Klein Tools #	Throat Opening	Overall Length
443A	1/2"	5-1/2"



Klein Tools #	Throat Opening	Overall Length
470	5/8"	5"



Swivel Hook with Plunger Latch

- Forged steel with swivel clevis and quick-acting plunger-style latch
- Designed to take 1/2" or lighter hand lines
- Swivel action prevents accidental fouling into secondary wires
- Maximum safe load: 750 lbs.
- 1-3/16" x 1" Swivel opening



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Anchor Hook

- Forged hook is designed to slip under insulator and engage pin of cross arm
- Standard on Klein block and tackle 1802-30 and H1802-30
- Maximum safe load: 750 lbs.
- 5/8" Eye I.D.

Klein Tools #	Throat Opening	Overall Length
258	1-7/8"	5-1/2"



Klein Tools #	Throat Opening	Overall Length
259	1-7/8"	6-1/2"

Swivel Anchor Hook

- Swivel clevis on this forged hook will engage with snap on Klein block and tackle 1802-30 and H1802-30
- Swivel prevents twisting and kinking of rope
- Maximum safe load: 750 lbs.
- 1-3/16" x 1" Swivel opening

Swivel Snap Hook

- Bronze swivel snap hook made for use on canvas buckets
- Maximum safe load: 150 lbs.
- 3/4" Eye I.D.
- 4-3/8" L x 1-5/8" W

Klein Tools #	Throat Opening	Overall Length
2012	5/8"	5"



Klein Tools #	Description
1702-20N	Klein-Kord Strap, 1" x 7'

Howe Wire Tool

- Strap is made of tough Klein-Kord
- Swivel hook is forged steel with large opening
- Shank of hook is lengthened to reach under insulator
- Other end has cam-lock to hold the load at any distance
- All metal parts are galvanized
- Maximum safe load: 500 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Sizing Range for Bashlin Belts

2 D-Ring Tool Belts

D Size In.	Minimum	Center Hole	Maximum	Tool Loops
D18	32	36	40	3
D19	33	37	41	3
D20	34	38	42	3
D21	36	40	44	4
D22	37	41	45	4
D23	38	42	46	4
D24	40	44	48	4
D25	41	45	49	4
D26	42	46	50	4
D27	44	48	52	4
D28	45	49	53	4

4 D-Ring & Back Support Belts

Upper Tongue

D Size In.	B-Series	G-Series/4D
D18	29-36	33-39
D19	30-37	35-41
D20	31-38	35-41
D21	32-39	37-43
D22	33-40	37-43
D23	34-41	39-45
D24	35-42	39-45
D25	36-43	41-47
D26	37-44	41-47
D27	38-45	43-49
D28	39-46	45-51

The Journeyman Body Belt

- Semi-floating, shifting “D” saddle
- Leather rolled-edge cushion
- Leather tongue, two D-ring



Bashlin #	D-Ring Size
160NL-D18	D18
160NL-D20	D20
160NL-D22	D22
160NL-D24	D24
160NL-D25	D25
160NL-D26	D26
160NL-D28	D28

The Floridian Body Belt

- Padded, contour cushion section
- Flares for the shifting D-rings
- 5-1/2” Back gives support
- Hand-laced top-quality leather



Bashlin #	D-Ring Size
88-D22	D22
88-D23	D23
88-D24	D24
88-D25	D25
88-D26	D26



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

2000EM Full Float Body Belt, 4 D-Ring

- Hand crafted of the highest quality leather
- 5-1/2" foam cushioned pad reinforced with rawhide lace
- Belt strap is leather with a nylon center to provide strength and longer life
- Four floating in-line dees provide a 4" lateral movement to reduce wear on the pole strap
- To order two D-ring style specify 2000M and size



Buckingham #	Dee Size	Belt Strap	Color
2000EM-BL-D20	20"	34"-42"	Black
2000EM-BL-D22	22"	37"-45"	Black
2000EM-BL-D23	23"	38"-46"	Black
2000EM-BL-D24	24"	40"-48"	Black
2000EM-BL-D25	25"	41"-49"	Black
2000EM-BL-D26	26"	42"-50"	Black
200EM-BR-D20	20"	36"-44"	Brown
200EM-BR-D22	22"	37"-45"	Brown
200EM-BR-D23	23"	38"-46"	Brown
200EM-BR-D24	24"	40"-48"	Brown
200EM-BR-D25	25"	41"-49"	Brown
200EM-BR-D26	26"	42"-50"	Brown

20182M Buck Mobility Belt, 4 D-Ring

- No lower strap which provides the mobility and freedom of movement
- 9" high fully padded body
- Lined with quality ultra-soft leather
- Two full float lower primary dee rings
- Two small upper dee rings for secondary lanyard
- Replaceable man rated upper strap



2019M Lightweight Full Float Body Belt, 4 D-Ring

- Dri-lex lined
- Stacked dee rings
- Two large full float double bar dee
- Two small dee rings
- Back support, no gut strap

Buckingham #	Dee Size	Belt Strap
2019M-D23	23"	38"-46"
2019M-D24	24"	40"-48"
2019M-D25	25"	41"-49"
2019M-D26	26"	42"-50"
2019M-D27	27"	44"-52"
2019M-D28	28"	45"-53"
2019M-D29	29"	46"-54"
2019M-D30	30"	47"-55"



Buckingham #	Dee Size	Belt Strap
20182M-D22	22"	37"-45"
20182M-D23	23"	38"-46"
20182M-D24	24"	40"-48"
20182M-D25	25"	41"-49"
20182M-D26	26"	42"-50"
20182M-D27	27"	44"-52"
20182M-D28	28"	45"-53"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialflettools.com

EZ Rider, Four D-Ring Belt

- Ergonomic, contoured design allows the belt to be worn comfortably and correctly, without compromising safety
- Supports the lower abdomen, reducing leg discomfort and numbness
- Dramatically improves “on the pole” comfort
- Easily connects pole lariats, pole chokers and similar WPF RDs
- Black leather, nylon cushion



Bashlin #	D-Ring Size
88UX4DMP-D18	D18
88UX4DMP-D20	D20
88UX4DMP-D22	D22
88UX4DMP-D23	D23
88UX4DMP-D24	D24
88UX4DMP-D25	D25
88UX4DMP-D26	D26
88UX4DMP-D27	D27
88UX4DMP-D28	D28

Four D-Ring Tool Belt

- Has all the long wearing qualities and a soft cushion for the “broken in” feel
- Features a nylon upper tongue with a quick release buckle or easy donning and adjustment
- D-Rings are sturdy enough to carry a strap, secondary lanyard or wood pole fall restricting device without getting “droopy”
- Black leather



Bashlin #	D-Ring Size
Q88GX4DCC-D18	D18
Q88GX4DCC-D20	D20
Q88GX4DCC-D22	D22
Q88GX4DCC-D23	D23
Q88GX4DCC-D24	D24
Q88GX4DCC-D25	D25
Q88GX4DCC-D26	D26
Q88GX4DCC-D27	D27
Q88GX4DCC-D28	D28

Buckingham #	Dee Size	Belt Strap
2018M-D22	22”	37”-45”
2018M-D24	24”	40”-48”
2018M-D25	25”	41”-49”
2018M-D26	26”	42”-50”
2018M-D27	27”	44”-52”
2018M-D29	29”	46”-54”
2018M-D30	30”	47”-55”

2018M Lightweight Full Float Body Belt, 4 D-Ring

- Dri-lex lined
- Two large full float double bar dee
- Two small dee rings
- Removable man rated gut strap



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialflettools.com



Standard Buck LineBacker Belt

- Turns a two dee ring body belt into a four dee ring belt
- Permanent abdominal stabilizer strap
- Permanent lumbar pad

Buckingham #	Size
6263-S	Small, 28"-32"
6263-M	Medium, 32"-36"
6263-L	Large, 36"-40"
6263-XL	X-Large, 40"-44"

Buckingham #	Description
4202-S	Small, 28"-32"
4202-M	Medium, 32"-36"
4202-L	Large, 36"-40"
4202-XL	X-Large, 40"-44"

Man Rated Gut Strap

- Able to be used with any two dee body belt and is completely adjustable for users comfort
- 5,000 lb. man rated connections
- Leather lined strap
- Standard tongue buckle



Buckingham #	Description
TB94089A	Titanium Pole Climber with Offset Stirrup & Nylon Foot Straps (21391)
TB91089A	Titanium Pole Climber with Offset Stirrup, Nylon Foot Straps (21391) & CCA Gaff
TB94059A	Titanium Pole Climber with Offset Stirrup, Nylon Foot Straps (21391), Nylon Leg Straps (2239) & Climber Pads (3122)
TB90089A	Titanium Pole Climber with Straight Stirrup, Nylon Foot Straps (21391) & CCA Gaff

Titanium Contoured Shank Replaceable Gaff Pole Climbers

- Gold colored with chrome colored gaffs and sleeves
- Contoured shank for ankle relief and comfort
- Straight and offset stirrups
- Dowel and screw style replaceable gaffs with 16° angle
- Climber with gaff weights 1 lb. 2 oz.



Bashlin #	Description
14	Replacement Gaffs, Unpolished 1-5/8" for Poles
14P	Replacement Gaffs, Polished 1-5/8" for CCA Poles
14T	Replacement Gaffs, Unpolished 2-1/2" for Trees


Replacement Gaffs

- Fit all Bashlin climbers with replaceable gaffs
- New screw for replacement are included
- Sold in pairs



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Bashlin #	Description
BD16BC-1N	Bottom Straps Attached, Unpolished Gaffs

BD16BC-1N Climber, Steel Alloy

- Replaceable gaff
- Offset design
- Twisted shank allows the shank to lie flat on the leg
- Top slide adjustment is 15"-18"
- 18"-21" Adjusting top sliders are available; add "A" to the part number

BD16B-1N Climber, Steel Alloy

- Adjustable, with a replaceable gaff
- Offset design
- Roomy ankle area and a triangular strap ring
- Includes #2 gaff guard and #5 gaff gauge standard
- Top slide adjustment is 15"-18"
- 18"-21" adjusting top slides are available; add "A" to the part number

Bashlin #	Description
BD16B-1N	Bottom Straps Attached, Unpolished Gaffs



Bashlin #	Description
BD14-1N	Bottom Straps Attached, Unpolished
BD14P-1N	Bottom Straps Attached, Polished
BD14-2N	Top-Bottom Straps Attached, Unpolished
BD14-4N	Top-Bottom Straps Attached, 130D Pads, Unpolished
BD14-5N	Top-Bottom Straps Attached, 140DS Pads, Unpolished

BD-14P Climber, Aluminum Alloy

- Contour shank with an offset design
- Replaceable polished gaff
- 17° Gaff angle makes this the most forgiving gaff on the market
- Includes #2 gaff guard and #5 gaff gauge standard
- Top slide adjustment is 15"-18"
- 18"-21" Adjusting top slides are available; add "A" to the part number

BD12C-1N Climber, Steel Alloy

- Simple, riveted non-replaceable gaff
- Offset design
- Twisted shank allows the shank to lie flat on the leg
- Top slide adjustment is 15"-18"
- 18"-21" Adjusting top slides are available; add "A" to the part number

Bashlin #	Description
BD12C-1N	Bottom Straps Attached, Unpolished Gaffs



Bashlin #	Description
2011-36	36" Pole Sling

Pole Sling

- Made for use with a Grip-All hot stick
- D-Rings are sized so one fits inside the other to choke it on a pole
- Safe working load:
 - Vertical: 1,000 lbs.
 - Choker: 1,000 lbs.
 - Basket: 2,000 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Polyester Shock Absorbing Lanyard

- Tubular nylon lanyard with shock absorbing core that eliminates the need for a bulky pack
- Meets ANSI Z359.1 performance standards
- Two snaphooks with 3/4" openings and high strength gates
- Complies with ASTM F887 Arc Flash Standards

Bashlin #	Description
2804-4HL	4' Lanyard



Bashlin #	Description
52N-2HL	6' Pole Strap

50 Series Pole Strap

- 6-Ply neoprene coated nylon
- Tongue buckle adjustment
- "Lineman Friendly" snap hooks
- Red wear indicator



Buck ComboYard Lanyard

- Tower lanyard that combines the best of multiple common lanyards into one
- 5' Dual tie-back lanyard with wear guard and rescue loops
- 12' Fall ANSI rated shock absorber
- Tie back snaps have a 5,000 lb. rated gate
- Two ANSI 3,600 lb. rated big BuckSnaps

Buckingham #	Description
5V67AQ1	Buck Combo Yard Lanyard



488R SuperSqueeze

- One handed outer strap adjustment with the WebGrab
- One handed adjustment on the inner strap with the BuckGrab
- Outer strap length: 36"
- Inner material: rope
- Inner material length: 70"

Buckingham #	Description
488R	SuperSqueeze with Rope and Carabiners for Distribution



Buck Adjuster Lanyard

- Fully adjustable positioning lanyard
- 1/2" Diameter
- Full red core wear indicator
- Double locking rope snap
- Clear protective tube to help provide maximum rope life
- Stitched eye allows user to minimize length for easy storage
- May also be used as primary work positioning device

Buckingham #	Length
9-6	6'
9-7	7'
9-8	8'



Buckingham #	Description
488RQ4	SuperSqueeze with Rope & Snaps for Distribution

488RQ4 SuperSqueeze

- One handed outer strap adjustment with the WebGrab
- Same one handed adjustment on the inner strap with the BuckGrab
- Outer strap length: 36"
- Inner material: rope
- Inner material length: 70"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

488TW2 SuperSqueeze

- One handed outer and inner strap adjustment with the WebGrab
- Same adjustability as the rope BuckGrab but on web
- Outer strap length: 52"
- Inner material: woven
- Inner material length: 78"

Buckingham #	Description
488TW2	SuperSqueeze with Web and Carabiners for Transmission



Buckingham #	Description
488W2Q3	SuperSqueeze with Locking Snap Hooks for Distribution

488W2Q3 SuperSqueeze

- One handed outer and inner strap adjustment with the WebGrab
- Same adjustability as the rope BuckGrab but on web
- Outer strap length: 36"
- Inner material: woven
- Inner material length: 48"

488W2 SuperSqueeze

- One handed outer and inner strap adjustment with the WebGrab
- Same adjustability as the rope BuckGrab but on web
- Outer strap length: 36"
- Inner material: woven
- Inner material length: 48"

Buckingham #	Description
488W2	SuperSqueeze with Web and Carabiners for Distribution



Buckingham #	Length
84V716-S1	6'
8VVR716	6'

Buckyard Stretch Lanyard

- Elastic bungee
- Reduces 6' lanyard to 44"
- Locking snap hook on one end and web loop on the other end
- 8VV-for full body harness w/steel ring dorsal attachment
- 84V-for full body harness w/web loop dorsal attachment
- S1 Suffix-meets ASTM F887 electric arc performance requirements



BuckStop Lanyard

- For full body harness with steel ring dorsal attachment
- 6" shock pad covered by a clear shrink tube
- Fixed length woven nylon with 1706 locking snap hook on both ends

Buckingham #	Length
5VV116	6'



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Buckingham #	Description
64V116S2+Z	6'

Buck Arrest Lanyard

- 16" Shock pack covered by water resistant nylon tube
- Meets ASTM F887 electric arc performance requirements
- 3,600 lb. gate and meets ANSI Z359.12-2009



Buckyard Lanyard

- Expands to 42"
- 8VV-for full body harness w/steel ring dorsal attachment
- 84V-for full body harness w/web loop dorsal attachment
- S1 Suffix-meets ASTM F887 electric arc performance requirements
- +Z Suffix-all hardware has 3,600 lb. gate and meets ANSI Z359.12-2009
- X6 Suffix-for 6' free fall meeting ANSI Z359.13-2009

Buckingham #	Length
8VV114S1+Z	4'
8VV114.5S1	4.5'
8VV116	6'
8VV116+Z	6'
8VV116S1X6	6'
84V116	6'
84V116S1	6'
84V116+Z	6'
84V116S1+Z	6'



Buckingham #	Length
48129W2Y-6	6'
48129W2Y-7	7'
48129W2Y-8	8'

SuperStrap Lanyard

- Features the patent pending WebGrab for easy adjustment
- Has all the benefits of web combined with the easy adjustment of rope
- Designed to use climbing over obstruction

Buckingham #	Length	Locker s
386099E	6'	99E
386699E	6'6"	99E
387099E	7'	99E
388099E	8'	99E



Nylon Positioning Strap with Tongue Buckle

- 6-Ply Neoprene impregnated strap with tongue buckle
- Excellent abrasion resistance
- Most widely used among utility linemen



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Buckingham #	Length	Lockers
346699E	6'6"	99E
347099E	7'	99E

Nylon Positioning Strap, Slide Buckle

- Neoprene impregnated strap with slide buckle

Buckstop Dual Lanyard

- Features two 30342 Big BuckSnaps that fit over a 4" angle
- Locking rope snap attachment
- Red rescue loops facilitate the rescue of an injured worker

Buckingham #	Description
5V6716RD+H+Z	Buck Stop Dual Lanyard



Buckingham #	Description
2649	1-Piece with Buckle Pad
21391	2-Piece with Split Ring

Climber Strap

- 1" Nylon
- 26" Length

Anchorage Ratchet Boom Strap

- 5,000 lbs. rated
- Designed to be used when your aerial boom truck has no anchor point or your anchor point is in an inconvenient location
- Inside of the strap is lined with gum rubber to eliminate slippage on the boom
- Ratchet is used to cinch the strap snugly on the boom
- Standard length is 50"

Buckingham #	Description
3809R	Ratchet Boom Strap



Buckingham #	Description
1706	Locking Rope Snap

Locking Rope Snap

- 1" Eye
- 15/16" Opening
- 6" Long
- 3,600 lb. gate load
- Rated to 5,000 lbs.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Big Buck Snap

- Larger opening that allows the user to easily connect over 4" single iron
- New design allows for ease of detachment
- Radiused (rounded) inner edge is designed to prevent damage to conductors
- Meets ANSI Z359.12 specification
- 3,600 lb. gate load requirement

Buckingham #	Description
30342	Large Locking Snap Hook



Buckingham #	Description
5005T	Twist Lock Steel Carabiner

Steel Twist Lock Carabiner

- 4-1/4" Length, 1" opening, 3,600 lb. gate, minimum breaking load-5,000 lbs.

60092 Gaff Guard

- Leather pole gaff guard with hook and loop fasteners
- Fits all climbers

Buckingham #	Description
60092	Pole Gaff Guard



Buckingham #	Description
6909U	Coated Wire Universal Pole Gaff

6909U Gaff Guard

- Universal coated wire universal pole gaff guard that fits all pole climbers: Buckingham, Bashlin, Klein and Stringer Brooks

Snap On Gaff Guard

- Fits all Buckingham replaceable pole gaffs with a 16° angle (A Style)

Buckingham #	Description
6909A	Snap On Gaff Guard



Bashlin #	Description
2	Leather Gaff Guard (PR)

Leather Gaff Guard

- Has Velcro top
- Russett leather
- Helps keep gaff edges sharp and protects from cuts or puncture wounds



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Gaff Shaping Kit

- For use on Bashlin Pole Gaffs only
- Includes
 - Gaff gauge
 - 6" Mill file with wooden handle
 - Sharpening stone
 - Instructions

Bashlin #	Description
27	Gaff Shaping Kit



B BASHLIN INDUSTRIES, INC.



Buckingham #	Description
603S8C700Z12-S	Small
603S8C700Z12-M	Medium
603S8C700Z212-L	Large

603S8C700Z12 X-Style Harness

- Split tongue quick connect buckles with leather chafes on the leg straps and at the torso for height adjustment
- Web dorsal loop attachment
- Reinforced web front loop that can be used for rescue or rope/cable grab
- Meets ASTM F887 electric arc performance requirements
- 5 Labels inside leather cover with Velcro wrap (wallet style)
- #3B Harness type with quick connect buckles
- Quick connect buckle leg strap attachment
- Web loop fall arrest attachment
- No body belt attachment or shoulder pads

619951 H-Style Summit Lite Harness

- This "H" style full body harness features a Dri-lex shell that fits like a vest
- Patent Pending quick connect buckles on the chest and leg straps, steel dee dorsal attachment
- Spring loaded friction buckles for height adjustment
- Frontal chest dee ring that adjusts up and down independently of the shoulder straps
- Harness is made from Type 13 nylon webbing
- Grommet tongue buckle to fasten the waist belts, and a 5" wide belt with thick padding and built in stiffener for maximum comfort
- Add "-K1" to Mfg # for arc rated harness meeting ASTM F887 electric arc performance requirements

Buckingham #	Description
619951-S	Small
619951-M	Medium
619951-L	Large
619951-XL	X-Large
619951-2X	2-Xlarge



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Buckingham #	Description
61991-M23	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Full Body Harness
61991-M24	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Harness
61991-M25	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Harness
61991-L23	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Full Body Harness
61991-L24	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Harness
61991-L25	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Harness
61991-L26	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Harness
61991-L28	2100M Stacked 4 D Leather, Full Float Body Belt Permanently Attached Full Body Harness

61991 Mobile 'X' Tower Harness

- Combination of an 'X' style harness permanently attached to a four dee ring body belt
- Features grommet leg straps and shoulder straps that articulate through the sternum dee ring
- Shoulder straps adjust with a single slide buckle on the upper portion of the harness
- Body belt has four work positioning dee rings
- Body belt is lined with sateen material and features a waist belt made of neoprene sandwiched between leather
- Upper and lower sections are connected together with webbing exceeding 5,000 lbs. tensile strength
- Meets ASTM F887 electric arc performance requirements

637G8C500CK1 'H' Style Full Body Harness

- 18" Dorsal pigtail with a small dee ring to attach a 4-1/2' shock absorbing lanyard
- Kevlar mesh shell
- FR Foam shoulder and leg pads
- Hook and loop chest strap
- Patented split tongue quick connect buckles with leather chafes on the leg straps
- Spring loaded friction buckles for height adjustment
- Made from Type 13 nylon webbing with silver upper and black lower sections
- Permanently attached fall arrest attachment
- No body belt attachment
- Meets ASTM F887 electric arc performance requirements

Buckingham #	Description
637G8C500CK1-M	Buckfit FR 'H' Style Full Body Harness, Medium
637G8C500CK1-L	Buckfit FR 'H' Style Full Body Harness, Large
637G8C500CK1-XL	Buckfit FR 'H' Style Full Body Harness, X-Large
637G8C500CK1-2XL	Buckfit FR 'H' Style Full Body Harness, 2X-Large



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleeetools.com



Buckingham #	Description
6025	Pole Gaff Maintenance Kit

Pole Gaff Maintenance Kit

- Tools and gauge for inspecting and performing pole gaff maintenance
- Includes:
 - Smooth single cut file (6058)
 - New and improved pole gaff gauge (6303); can now gauge CCA gaffs
 - Finishing hone (6501)

Cushion Wrap Pad with Cinch Loop & Insert

- Hook and loop pad that features a continuous wrap with a cinch loop and metal insert
- Strap 4" wide

Buckingham #	Description
3502C	Angled, Metal Insert
3504C	Straight, Metal Insert



Big Buck Wrap Pad

- Increased surface area to distribute pressure
- Thick, comfortable pad
- Moisture wicking Dri-lex lining
- Adjustability of hook and loop wrap
- Steel "C-Pad" insert for proper climber shank position
- Cinch loop to provide an extra tight fit
- Rolled edge to prevent chafing

Buckingham #	Description
3202C	Big Buck Wrap Pad

Buckingham #	Description
3500	Cushion Wrap w/Metal Insert
3500C	Cushion Wrap with Cinch Loop, No Metal Insert

Cushion Wrap Pad

- Hook and loop pad with Velcro
- 3/4" Padding
- Strap 4" wide



Climber Pad

- 'L' Tunnel pad has a soft 3/4" cushion sandwiched between two pieces of leather
- All leather construction with 3/4" padding
- Three loops and a tunnel design to keep climber stationary

Buckingham #	Description
3125	Climber Pad

BuckLimiter

- Aluminum alloy construction inside and out
- Tangle free swivel top for added mobility
- 7' Extension for expanded work area
- Braking system designed for smooth consistent operation to prevent "jerky" lock-ups
- Rated to 350 lbs.

Buckingham #	Description
6008-74DV+Z	W/Steel Carabiner-3600 Gate (50051) and Snap Hook (1706)
6008K-74DV+Z	W/Steel Carabiner-3600 Gate (50051) and Snap Hook (1706) Plus Kevlar to Meet ASTM F887



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Aerial Basket Rescue Kit

- Provides safe removal of injured personnel from aerial baskets
- Boom strap has special coating to help prevent slippage
- Two Sheave blocks with 75' of 3/8" nylon rope
- 6" Diameter x 18" waterproof storage canister

Hastings #	Description
06-161	55" Boom Strap
06-165	Two Sheave Blocks w/75' of 3/8" Nylon Rope
06-166	Complete Rescue Kit
01-3318	Canister Storage Unit

BuckStep Suspension Trauma Rescue System

- Designed to alleviate the effects of orthostatic intolerance
- Allows a victim to immediately deploy a body support system that allows for improved blood circulation and the ability to move and flex muscles until rescue
- Attaches to a full body harness and is fully adjustable for any sized user
- For an arc tested system that meets ASTM F887



Buckingham #	Description
105RSK1	BuckStep Rescue System



High Elevation Self-Rescue System

- Provides all the components required to self-rescue or if the need arises to rescue a fellow employee
- Descender will automatically stop the user until the user compresses the handle allowing a smooth controlled descent
- Built in safety feature stops descent if the user compresses the handle to hard
- Unit will allow the rescuer the advantage of lowering a hurt person with ease as well
- Kit comes with retrofit rappelling straps that can be added to an existing harness for self-rescue


Buckingham #	Description
101SR-50	50' of 1/2" Braided Rope
101SR-100	100' of 1/2" Braided Rope



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

How To Size A Body Belt: The most critical measurement of a body belt, in terms of comfort, is the dee measurement. The proper dee size is normally found by measuring from the prominent part of one hip bone around the back to the same point on the other hip bone. Add 1" (25 mm) for non padded belts and 2" (50 mm) for padded belts so that the dee ring heels are just forward of the hip bones and not on them. All measuring should be done over clothing to be worn under the belt. Normal combinations of dee and belt measurements are shown below.

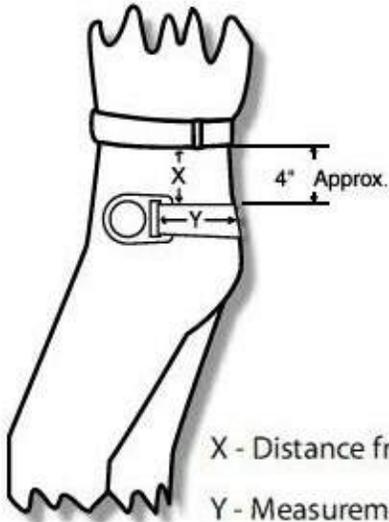

X - Distance from waist to top of hip bone to where body belt is worn.

Y - Measurement is from front of hip bone around the back to the front of the other hip bone.

Measure - ("Y" distance) is hip to hip and add 2 inches to padded belts and 4" for lightweight dri-lex belts. This measurement is the Dee size.

Rule of Thumb - Measure from seam of pant, around buttocks to other seam and add 2 inches to padded belts and 4 inches to lightweight dri-lex belts.

Dee Size		Belt Strap* Min		Belt Strap Center Hole		Belt Strap Max		No. of Tool Loops
In.	cm.	In.	cm.	In.	cm.	In.	cm.	
D18	46	32	81	36	91	40	102	3
D19	48	33	84	37	94	41	104	3
D20	51	34	86	38	97	42	107	3
D21	53	36	91	40	102	44	112	4
D22	56	37	94	41	104	45	114	4
D23	58	38	97	42	107	46	117	4
D24	61	40	102	44	112	48	122	4
D25	64	41	104	45	114	49	125	4
D26	66	42	107	46	117	50	127	4
D27	69	44	112	48	122	52	132	4
D28	71	45	114	49	125	53	135	4
D29	74	46	117	50	127	54	137	4
D30	76	47	119	51	130	55	140	4

*Belt Strap Is Not Waist Size.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Multi-Range Voltage Detectors, Analog

- Confirms a line is de-energized
- Calibrated to read approximate line-to-line voltage when connected to any phase conductor
- Gives metered readout capable of distinguishing actual line voltage from static or feedover from an adjacent line

Chance #	Description
C4030979	1-40kV Scales Voltage Detector (Includes Test Point)
C4031140	16-161kV Scales Voltage Detector



HDE#	Description
VW-30	V-Watch Detector Only
VW-20H	V-Watch with Carrying Case and Lanyard

V-Watch Personal Voltage Detector

- Alerts user to proximity of high voltage
- Audible and visual alarms increase in frequency the closer the user gets to energized equipment
- Typical initial warning distance is about 7' from a 4kVAC conductor
- Low battery indicator
- Field replacement 9V battery
- Rugged protective housing
- Built-in self-test
- Operating temperature: -20° to 120°F
- Water withstand: protected from falling rain per IEC-529, level 2
- Voltage range: 2400VAC line-to-ground and above

Electronic Voltage Detector

- Detects distribution and transmission of voltages
- Emits an audible and visual alarm if conductor is energized
- Requires direct contact with the conductor to detect voltage
- Water resistant housing
- Compact, lightweight and easy to use
- 9V lithium or alkaline battery operated
- For system voltages up to 69kV (Phase-to-phase)

HDE #	Description
TAG-200	Voltage Detector
TAG-200MR	Multi-Range Voltage Detector



Salisbury #	Description
4544	Voltage Detector, Phase to Phase Settings: Off/240V/4.2kV/15kV/25kV/35kV/69kV/115kV/230kV
4644	Voltage Detector, Phase to Phase Settings: Off/240V/4.2kV/35kV/69kV/115kV/230kV/345kV/500kV
4744	Voltage Detector, Phase to Phase Settings: Off/Test-240V/Battery/URD:15kV/25kV/35kV
4556	Complete Kit, Includes (1) 4544 Tester 240V to 230kV, (1) 21517 Case and (1) 2500 Shotgun Adapter
4667	Complete Kit Includes (1) 4644 Tester 240V to 500kV, (1) 21517 Case, (1) 2500 Shotgun Adapter
4769	Complete Kit Includes: (1) 4744 Tester 240V to 69kV, (1) 21517 Case, (1) 2500 Shotgun Adapter

Self Testing Audio/Visual Voltage Detector

- Used to verify live or de-energized conductors
- For use with rubber insulating gloves or hot sticks using the splined universal end fitting
- Indicates the presence of voltage with an extra bright LED light and a distinctive audible signal
- Includes three C batteries



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Audio/Visual Voltage Detector

- Used to verify live or de-energized conductors
- For use with rubber insulating gloves or hot sticks using the splined universal end fitting
- Indicates the presence of voltage with an extra bright LED light and a distinctive audible signal
- Includes three C batteries



Salisbury #	Description
4244	Voltage Detector, Phase to Phase Settings: Off/240V/4.2kV/15kV/25kV/35kV/69kV/115kV/230kV
4344	Voltage Detector, Phase to Phase Settings: Off/240V/4.2kV/35kV/69kV/115kV/230kV/345kV/500kV
4444	Voltage Detector, Phase to Phase Settings: Off/Test-240V/Battery/URD:15kV/25kV/35kV
4356	Complete Kit Includes (1) 4244 Tester 240V to 230kV, (1) 21517 Case, (1) 2500 Shotgun Adapter
4367	Complete Kit Includes (1) 4344 Tester 240V to 500kV, (1) 21517 Case, (1) 2500 Shotgun Adapter
4469	Complete Kit Includes (1) 4444 Tester 240V to 69kV, (1) 21517 Case, (1) 2500 Shotgun Adapter
4445	Voltage Detector Tester
2500	Shotgun Adapter

Analog Voltage Detector

- Dual application design
- Detects 0-40kV line to ground (0-69kV phase to phase)
- A proximity or direct contact on overhead and underground systems
- Detect voltage from the ground on bare overhead and underground systems
- Test secondary voltage on bare or insulated cables
- Test capacitive test points
- Indicates line to ground values for nominal or induced voltages
- 5-Position selector switch is calibrated for height above ground to compensate for a capacitive coupling effect
- Shielded to minimize stray field interference
- Overload protection up to 500kV
- Water resistant construction
- Contained in a highly durable carrying case



Bierer Meters #	Description
VDA 040P	0-40kV Analog Voltage Detector



Sensor Link #	Description
8-022	Wide Jaw 60hz True RMS w/Soft Case

Ampstik High Voltage Ammeter

- Slips on and off the conductor with ± 1% accuracy
- Open CT rejects stray magnetic fields
- Range of operation, voltage: 0-69kV, current: 1-2,000A
- Wide jaw sensor opening: 3.86"
- Shock and water resistant housing
- Non-conductive universal adapter
- One-button operation



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

511 Clamp-On Meters

- Standard size, full function clamp-on meter
- One-handed operation
- Measures AC Amps, AC Volts, DC Volts, Ohms, Continuity, Frequency and has a Diode Test Function

AEMC #	Description
2117.67	Jaw Opening is 1.575"



Bierer Meters #	Description
PD800W	Wireless Phasing Meter & Voltage Detector

Cordless Digital Phasing Meter

- FCC Licensed wireless technology
- Large easy-to-read digital display with backlight
- High intensity color coded LED indicator lights
- Impact and water resistant construction
- Completely shielded to minimize stray field interference
- Direct contact from 120V to 69kV, distribution systems
- Non-contact from 69kV to 800kV, transmission/substation systems
- Automatically alerts user of delta/wye transformation by an indicator light blinking
- Operating range of 100'
- Contained in a highly durable padded carrying case

Digital Voltage Phasing Meter

- Instrument for measuring overhead and underground voltages
- AC, Hi-Pot and DC
- Large easy-to-read digital meter and analog bar graph
- Coiled, self-retracting cable; 16" retracted and 10' when fully extended
- Meter reads to nearest 100 volts
- Kit includes: 6702 Voltmeter with case, two 6' universal fiberglass poles with carrying case

Hastings #	Description
6702	0-40 kV Digital Meter
6702-1	15/25kV Loadbreak Bushing Adapter
6702-2	DC Hi-Pot Adapter for Use Up To 35kV
6702-3	35kV Loadbreak Bushing Adapter
6703	Extension Resistors for Use w/6702 (Pair)
6711	0-40kV Digital Meter Kit



Hastings #	Description
6722	Phase-Tell III Wireless Phasing Meter
266	URD Bushing Well Adapter
01-266	Padded Case for Bushing Adapters

Phase-Tell III Wireless Phasing Meter

- Used to determine phase relationships on three-phase power systems, overhead and URD applications
- Battery powered, two-piece wireless phasing tool
- Wireless units communicate up to 300' apart
- Voltage range 4kV to 500kV
- Operates on two "AA" batteries, included
- FCC Compliant
- Auto shut-off
- Includes carrying case and instructions



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

DM-820A Digital Multimeter

- Crest capture (peak hold) plus recording of max, min, max-min and average
- Two voltage detection modes- non-contact or using a single test lead
- One temperature measurement using a type K thermocouple
- Conductance measurement
- Measurement category CATIV, 1,000 V
- Includes:
 - 9V Battery
 - Bead temperature probe
 - Test leads
 - Protective boot
 - Carrying case

Greenlee #	Description
DM-820A	Digital Multimeter



Greenlee #	Description
DM-860A	Digital Multimeter

DM-860A Digital Multimeter

- AC+DC True RMS, 50,000-count display for greater accuracy
- Performs resistance, conductance, frequency, duty cycle, temperature and capacitance measurements, plus diode and continuity tests
- Bright backlit display is easy to read under any light condition
- Measurement category CATIV, 1,000V
- Includes:
 - 9V battery
 - Bead temperature probe
 - Test leads
 - Protective boot
 - Carrying case

CM-660 AC Clamp-On Meter

- Auto power off for longer battery life
- Amperage measurement: 600A AC
- Voltage measurement: 600V
- Display: 3-1/2 digit LCD, 2,000 count
- Resistance: 2,000 OHM
- Jaw opening: 1.38"
- Measurement category: CAT III, 600V
- Includes:
 - 9V battery
 - Test leads
 - Carrying case

Greenlee #	Description
CM-660	AC Clamp-On Meter



Dual-Range High Voltage Non-Contact Tester

- Test presence of voltage in overhead conductors or find faults in cables
- Low range for 50V AC to 1.5kV AC
- High range for 1.5kV AC to 132kV AC
- Audible and visual signs indicate presence of voltage
- Water resistant

Klein Tools #	Description
HVNCVT-1	Tester with Durable Carrying Case



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Regulator Neutral Detector

- Eliminates high or low voltages caused by cycling the regulator to the upper or lower limit and then counting steps back to neutral
- 0-2,000V range is shown in one volt increments
- Works with all regulators up to and including 34.5kV
- Contact electrodes are knurled to aid in contact with conductors

Hastings #	Description
6709-1	Regulator Neutral Detector



Hastings #	Description
6793	Tester, w/Battery & Carrying Case

Transformer and Capacitor Tester

- Test new transformers and capacitors, plus troubleshoot in-service units
- Eliminates the blowing of cutout fuses to determine the condition of equipment
- Magnetized back allows hands to be free to install and remove cables and clips
- Weatherproof, high-impact resistant plastic housing
- Operates on 9V battery, included

Ampstik Plus Multiple Reading Ammeter

- Slips on and off the conductor with $\pm 1\%$ accuracy
- Open CT rejects stray magnetic fields
- Range of operation, voltage: 0-500kV, current: 1-5,000A
- Standard jaw sensor opening 2.5"
- Shock and water resistant housing
- Non-conductive universal adapter
- One-button operation

Sensor Link #	Description
8-020-XT	Std Jaw 60hz True RMS w/Soft Case
8-020XT PLUS	Std Jaw 60hz True RMS w/Soft Case Stores 4 Readings



Knopp #	Description
44030	Phase Sequence Rotation Meter
44050	Cordura Carry Case (Sold Separately)

Phase Sequence Indicators

- Used to determine the phase sequence (A-B-C or C-B-A) of three-phase voltages
- Rotating-disk design
- Color-coded 36" leads
- 3-Phase, 3-Wire 60-600V circuits and 25-60 cycle current



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



HDE #	Description
TL-MAN-N	TILT II Transformer Tester with Manual Self-Test, Padded Carrying Bag & Instruction Manual
QC-MAN-N	Quick-Check Transformer & Capacitor Tester with Manual Self-Test, Padded Carrying Bag & Instruction Manual


Transformer & Capacitor Testers

- Tests transformers and capacitors for major defects before energizing
- Test overhead, pad-mount and other distribution transformers as well as capacitors and capacitor banks
- Tests the primary and secondary sides of de-energized transformers without disconnecting
- Prevents line workers from installing a fuse on a shortened transformer or capacitor
- Quickly verifies the secondary connections are not shorted
- Compact, lightweight and easy-to-use
- Powered by a 9V alkaline battery
- Super bright LED indicators
- Audible alarm confirms successful test
- Continuous testing while button is pressed
- Includes:
 - Large copper alligator clips with heavy-duty boots
 - Heavy-duty rubber insulated coiled test leads

Protective Grounding Tester Set

- Used to check resistance in protective grounding sets
- Applies direct current across the test specimen
- Instruction video and manual includes procedure details
- Includes:
 - Self-contained carry case
 - Two ball-stud terminals
 - DVD demonstration video
 - Two trouble-shooting probes
 - Self-test cable

Chance #	Description
C4033220	115/120V Protective-Ground-Set Tester

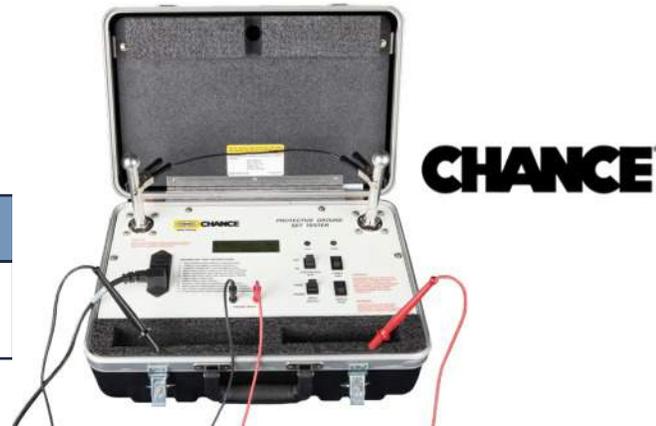

CHANCE

CHANCE



Chance #	Description
C4033178	115V Wet/Dry Hot Stick Tester

Wet/Dry Hot Stick Testers

- Portable unit
- Wet and dry modes selected by a toggle switch
- Graduated meter gives precise readout of each tool's leakage current
- For testing any length fiberglass-reinforced plastic hot stick up to 3" in diameter
- For spot checks at field jobsite's or periodic diagnostics in workshops

Phasing Testers, Analog

- For distribution circuits
- Determine phase relationships and approximate voltage, line-to-line or line-to-ground
- Two fiberglass poles with end fittings threaded for interchangeable probes
- Probe fittings couple with high-impedance component encased in each pole

Chance #	Description
H18761	16kV Tester Hook Probes, Case and Manual



CHANCE



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



CHANCE

Chance #	Description
T4032271	5-40 kV Multi-Range Voltage Detector

Multi-Range Voltage Detectors, Analog

- For overhead and URD systems to 40kV
- With TP setting for test point on URD elbows
- Test both overhead and underground distribution systems
- For systems in voltage classes from 5 through 40kV
- Interchangeable probes and adapters
- Furnished owner's manual illustrates operating details for all models
- Includes:
 - Multi-Range voltage detector
 - Hook and straight probes
 - Elbows and bushing adapters
 - Case

Distribution Auto-Ranging Voltage Indicators (ARVI)

- 600V to 69kV for overhead and underground
- Automatic-ranging function quickly displays approximate line-to-line voltage class
- Single pushbutton activates the instrument
- Single light indicates power on (by glowing solid) or low battery (by blinking)

- C4033374 Includes:
 - Tester unit
 - Shepherd hook probe
 - Instruction manual
 - Hard shell padded case
- T4033418 Includes:
 - Test unit
 - Shepherd hook probe
 - Elbow adapter
 - Bushing adapter
 - Voltage indicator tester
 - Instruction manual
 - Hard shell padded case



CHANCE

Chance #	Description
C4033374	Basic Distribution ARVI for Overhead Applications
T4033418	Basic Distribution ARVI for Overhead and Underground Applications



AEMC
INSTRUMENTS

AEMC #	Description
2135.50	6471 Multi-Function Ground Resistance Tester Kit, 300 ft.
2135.54	6472 Multi-Function Ground Resistance Tester Kit, 500 ft.
2135.49	Ground Resistance Tester Only for 2135.50 kit
2135.51	Ground Resistance Tester Only for 2135.54 Kit

6471, 6472 Multi-Function Ground Resistance Tester Kits

- 3- and 4-Point Fall-of-Potential measurement with manual or automatic frequency section
- 4-Point Soil Resistivity measurement with automatic calculation of RHO (p) and user selection of the Wenner or Schlumberger test method
- Selectable test frequency, stores up to 512 complete test results in internal memory
- Rechargeable NIMH batteries from wall charger or vehicle power
- Includes DataView software for data storage, real-time display, analysis, report generation and system configuration
- Android app available



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

6416, 6417 Clamp-On Ground Resistance Tester

- Touch voltage indication (warns of unsafe conditions)
- Direct reading of ground resistance from 0.01 Ohm to 1,500 Ohm
- Direct reading of continuity and ground loop resistance
- Direct reading of ground leakage or phase current from 2mA to 40A rms
- Jaw design with large 1-1/4" window, accommodates up to 1,000kcmil cables
- Auto-off for power management
- Rugged Lexan head and body construction resists breakage
- Bluetooth communication with Android App (6417)

AEMC #	Description
2141.01	6416 Ground Resistance Tester
2141.02	6417 Ground Resistance Tester



Tester Accessories

Chance #	Description
H18766	Shepard Hook Probe
H18766S	Straight Probe
C4033409	Voltage Indicator Tester
T4030428	15kV Only Bushing Adapter
T4030857	15-35kV Bushing Adapter
C4031762	16kV Hi-Pot Adapter



C4031762



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Telescoping Barricade Bar

- Slides over top of any traffic cone
- Nylon and polyethylene material
- Bar telescopes from 51” to 85”

Hastings #	Description
6850	Telescoping Barricade Bar
6851	Caution Sign, Snap-On
6852	Danger Sign, Snap-On



Truck Safety Barricade

- Can be installed, positioned, or raised and removed in minutes
- Fiberglass arm is easily positioned to adjust barricade for proper height above the ground and to compensate for parking on uneven terrain
- Design allows fiberglass arm to be quickly locked in eight different positions
- Arm can be moved to “vertical travel position” when movement of truck for a short distance is required
- Includes:
 - Four 4’ Fiberglass arms
 - Four Signs
 - 150’ Yellow polypropylene rope

Hastings #	Description	Weight
6795	Truck Safety Barricade	12 lbs.
6795-1	4’ Fiberglass Barricade Arm	2.2 lbs.

Traffic Cones

- Heavy-duty, all-weather
- 100% PVC
- Stackable for easy storage
- Reflective collars for added visibility

JBC Safety #	Description	Weight
RS90045CT3M64	36”	10 lbs.



Bone #	Description
STOP-2484DG/HI	24”

Stop-N-Slow Paddles

- Sign faces are BONELIGHT ACM
- Diamond Grade Material
- Staff included with paddle

Single Spring Loaded Sign Stand, Universal Bracket

- Bright orange, powder-coated legs allow sign stand to be easily seen
- Universal sign bracket will hold most roll-up signs
- Dual pull pin/kick release lever
- Quick set up and take down
- Spring action allows sign to bend and resist wind
- Weight: 22 lbs.

Bone #	Description
SZ-412SUB	Single Spring Sign Stand



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Bone #	Description
4848-MW	Men Working Roll-Up Sign
4848-UWA	Utility Work Ahead Roll-Up Sign
4848-FAS	Flagger Ahead Symbol Roll-Up Sign
4848-LCA	Lane Closed Ahead Roll-Up Sign
4848-LSCA	Left Shoulder Closed Ahead Roll-Up Sign
4848-BPTS	Be Prepared to Stop Roll-Up Sign
4848-RLCA	Right Lane Closed Ahead Roll-Up Sign
4848-OLA	One Lane Ahead Roll-Up Sign
4848-OLRA	One Lane Road Ahead Roll-Up Sign

SafeZone 48" x 48" Marathon Reflective

- All signs are designed using the Standard Highway Signs Manual specified in the MUTCD
- Fluorescent orange
- Retroreflective microprisms formed on a flexible glossy and UV-stabilized polymeric film
- Sheeting has protective film on the facing side and backed with a heavy vinyl coated fabric

Ergonomic Kneeling Pad

- Heavy duty nitrile foam cushion top
- Bottom layer .25" non-slip rubber
- Relieves lower back and leg stress
- Will not absorb water
- Acts as a thermal barrier to cold ground

Estex #	Description
2735-12-22	12" x 22"
2735-16-20	16" x 20"
2735-18-36	18" x 36"



Rubbermaid #	Size
1683	3 gal
1685	5 gal

Beverage Coolers

- Durable construction resists scratching, denting and fading
- Drip-resistant spigot, screw-tight lid
- Extra-thick insulation ensures superior thermal retention
- Stain and odor resistant, easy-to-clean liner
- In-molded handles



Water Cooler Mounting Bracket

- Specifically designed for Rubbermaid water coolers, fits any size
- Durable, weather-resistant construction
- Made for horizontal mounting

Rubbermaid #	Description
1640	8" x 13" x 12-1/2" Mounting Bracket with Straps



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Youngstown #	Size
03-3450-80-S	Small
03-3450-80-M	Medium
03-3450-80-L	Large
03-3450-80-XL	X-Large
03-3450-80-XXL	2X-Large

Waterproof Winter Plus Gloves

- Waterproof, windproof and breathable inner membrane, keeps hands warm and dry
- Durable and form-fit outer shell maintains dexterity
- Durable, flexible non-slip palm reinforcement
- Grips in wet and dry conditions and increases durability
- Internal knuckle protection on top of hand
- Double-stitched bonded nylon thread for extended life
- Terry cloth thumb for wiping sweat and debris

Safety Lime Waterproof Winter Gloves

- High-visibility lime coloring on top of hand
- 100% waterproof and windproof to keep hands warm and dry
- Reflective 3M Scotchlite on knuckle and wrist
- Insulating micro-fleece liner warms hand
- Durable, non-slip reinforced palm, fingers and thumb
- Form-fit outer shell maintains dexterity
- Ideal for DOT, airport operations, municipalities and winter road work

Youngstown #	Size
08-3710-10-S	Small
08-3710-10-M	Medium
08-3710-10-L	Large
08-3710-10-XL	X-Large
08-3710-10-XXL	2X-Large



Youngstown #	Size
06-3020-60-S	Small
06-3020-60-M	Medium
06-3020-60-L	Large
06-3020-60-XL	X-Large
06-3020-60-XXL	2X-Large

Mechanics Plus Gloves

- Water and oil resistant synthetic suede base layer
- Palm padding dampens vibration
- Breathable stretch nylon on top of hand wicks moisture and heat
- Terry cloth thumb for wiping sweat and debris

Leather Utility Plus Gloves

- Arc rated 20.8 cal/cm², HRC 2
- 4" Safety cuff for wrist protection
- Durable high quality goatskin leather
- Ergonomic, 3-D performance glove pattern form-fits to hand
- Extra wide pattern reduces hand fatigue and increases comfort

Youngstown #	Description
11-3245-60-S	Small
11-3245-60-M	Medium
11-3245-60-L	Large
11-3245-60-XL	X-Large
11-3245-60-XXL	2X-Large



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Youngstown #	Size
03-3060-80-S	Small
03-3060-80-M	Medium
03-3060-80-L	Large
03-3060-80-XL	X-Large
03-3060-80-XXL	2X-Large

General Utility Plus Gloves

- Durable non-slip reinforcement on palm, fingers and thumb
- Neoprene cuff adds support and secures fit
- Breathable stretch nylon on top of hand wicks moisture and heat
- Terry cloth thumb for wiping sweat and debris

Winter Glove, Water Resistant, Knit Wrist

- 3M Thinsulate lining
- Long knit wrist to keep out snow and ice
- Wing thumb, gunn pattern

Salisbury #	Size
SP-S	Small/Med
SP-L	Large/XL



SALISBURY
by Honeywell

SALISBURY

by Honeywell



Salisbury #	Size
UWG-WPGC/S	Small
UWG-WPGC/M	Medium
UWG-WPGC/L	Large
UWG-WPGC/XL	X-Large
UWG-WPGC/2X	2-Xlarge

Winter Utility Glove, Gauntlet Style Cuff, Waterproof

- 100% Waterproof, windproof and breathable
- Sport wool liner
- 3M Thinsulate lines top of hand, fingers and cuff
- Reinforced palm, non-slip saddle

Kevlar Utility Glove

- 100% Brushed Kevlar lining
- Level 4 (out of 5) on EN388 cut standard
- PVC Reinforced for durability
- Terry cloth brow wipe on back of thumb
- Double stitched



SALISBURY

by Honeywell

Salisbury #	Size
UWG-KLG/	Small
UWG-KLG/	Medium
UWG-KLG/	Large
UWG-KLG/	X-Large
UWG-KLG/	2X-Large

SALISBURY

by Honeywell



Salisbury #	Size
UWG-GPU/S	Small
UWG-GPU/M	Medium
UWG-GPU/L	Large
UWG-GPU/XL	X-Large
UWG-GPU/2X	2X-Large

Utility Plus Glove

- All purpose, abrasion resistant
- PVC Reinforcement for durability
- One-piece back of hand with knuckle protection
- Terry cloth brow wipe on back of thumb
- Adjustable hook & pile closure



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Golight #	Description
7900	White w/Permanent Mount
7901	White w/Magnetic Shoe
7951	Black w/Magnetic Shoe

RADIORAY Halogen Portable

- Includes:
 - Wireless hand-held remote
 - Suction cup and permanent mount shoe (7900)
 - Suction cup and magnetic mount shoe (7901/7951)
 - 15' cord with cigarette plug for 12V DC
- Unit size: 7" x 7" x 8"



Waypoint Pistol-Grip Battery-Powered Spotlight

- Three modes: high, low, strobe
- C4 LED Illumination output
- 210 Lumens
- Powered by four C batteries (not included) or 12V DC power cord (included)
- Unlimited run time when using 12V DC cord
- High impact polycarbonate housing
- Includes lanyard
- Integrated stand for scene lighting

Streamlight #	Description
44900	Waypoint Piston-Grip Spotlight with DC Cord, Yellow
44902	Waypoint Piston-Grip Spotlight with DC Cord, Black



Waypoint Rechargeable Pistol-Grip Spotlight, 44910

- Three modes: high, low, strobe
- C4 LED Illumination output
- 370 Lumens (high), 30 lumens (low)
- Powered by rechargeable lithium ion battery
- Full recharges in four hours
- Rechargeable up to 800 times
- Trigger-style switch
- High impact polycarbonate housing, rubberized lens protector
- Includes high-strength adjustable lanyard
- Integrated stand for scene lighting
- Light will float, IPX 8 rated, waterproof to two meters

Streamlight #	Description
44910	Waypoint Rechargeable Pistol-Grip Spotlight, Yellow
44900	Waypoint NON-Rechargeable Pistol-Grip Spotlight, Yellow



E-Spot LiteBox Rechargeable Lantern

- Three C4 LEDs with a 50,000 hour lifetime produce a uniform spot pattern
- Zero-maintenance 6V, 12Ah sealed lead acid battery
- High-impact ABS thermoplastic housing, rubberized impact bumper, lens ring and cushioned-grip handle
- Red and green LEDs give charge status feedback
- Includes AC/DC charge cords, shoulder strap and mounting rack
- 540 Lumens (high), 330 lumens (low)

Streamlight #	Description
45851	E-Spot LiteBox Rechargeable Lantern, Orange
45871	E-Spot LiteBox Rechargeable Lantern, Yellow



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

LiteBox Accessories

- Battery; zero maintenance 6V, 12Ah, rechargeable up to 500 times
- Upgrade kit; converts halogen to LED, 540 lumens

Streamlight #	Description
45937	Sealed Lead Acid Battery
45845	E-Spot LiteBox Upgrade Kit



Streamlight #	Description
45527	LiteBox Rechargeable Lantern less Charger Orange, 20W Spot Bulb
45116	LiteBox Rechargeable Lantern w/Shoulder Strap, Chargers & Charge Rack, Orange 8W Spot Bulb

LiteBox Rechargeable Lantern

- High-intensity halogen bi-pin bulb
- High-impact ABS thermoplastic housing with rubberized impact bumper, lens ring, and cushioned-grip handle
- 8WS Bulb: 150 lumens, 9 hour run time
- 20WS Bulb: 400 lumens, 3.5 hour run time

3AA HAZ-LO Div 1 Headlamp

- Class 1, Div 1 rated
- Powered by three AA alkaline batteries (included)
- One C4 LED 50,000 hour lifetime
- 11 hour run time, 120 lumens
- All openings O-ring sealed
- Unbreakable polycarbonate lens
- Push-button switch
- 7.1 oz, impact-resistant housing
- 90° tilting head
- Adjustable elastic head strap, mounting plate and rubber hard hat strap included



Streamlight #	Description
61200	3AA HAZ-LO, Yellow Headlamp



Septor LED Headlamp

- Class 1, Div 2 rating
- Low level battery indicator
- Soft flood light; good for up close work
- Powered by three AAA alkaline batteries (included)
- Seven 100,000 hr life ultra-bright, white LEDs
- 120 Lumens (7 LEDs), 45 lumens (3 LEDs), 13 lumens (1 LED)
- Runs up to 55 hrs. (single LED)
- 5.50 oz., 90° tilting head
- Adjustable elastic head strap, mounting plate and rubber hard hat strap included



Streamlight #	Description
61052	Septor LED, Yellow Headlamp



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Trident HP Headlamp

- Class 1, Div 2 rated
- Water resistant lightweight thermoplastic construction
- 80 lumens typical (C4 LED), 35 lumens typical (3 white), 11 lumens typical (1 LED)
- White C4 LED technology, shock resistant, with a 50,000 hour lifetime, three 5mm white LEDs
- Three AAA alkaline batteries
- 5.5 oz., 90° tilting head
- Adjustable elastic head strap, mounting plate and rubber hard hat strap included



Streamlight #	Description
61050	Trident HP, Yellow Headlamp



Streamlight #	Description
90627	Knucklehead LED Rechargeable Worklight, Yellow
90657	Knucklehead LED Rechargeable Worklight, Orange
90607	Knucklehead LED Rechargeable Worklight, Black

Knucklehead Rechargeable Worklight

- Shockproof dual C4 premium LED technology, impact-resistant
- 210° Articulating head that rotates a full 360°
- Four modes-high, low, moonlight and flash
- Dual power source: accepts rechargeable NiCd battery pack or four AA alkaline batteries (included)
- Rubber dome push-bottom actuator
- Removable magnet with 135 lb. pull strength; integrated storable hanghook
- High-impact nylon polymer construction
- 200 lumens (high); 63 lumens (low)



Stinger Battery

- 3-cell, 3.6V NiCd sub-C battery is rechargeable up to 1,000 times

Streamlight #	Description
75175	NiCd Battery Stick



Streamlight #	Description
76132	PolyStinger LED Rechargeable Flashlight, Black

PolyStinger LED Rechargeable Flashlight

- Non-conductive nylon polymer with non-slip rubberized comfort grip
- Unbreakable polycarbonate lens with scratch-resistant coating
- Fits existing Stinger snap-in chargers
- Ten hour steady charge, 2.5 hour fast charge
- C4 LED Technology, shock-proof with a 50,000 hour lifetime
- 3-Cell, 3.6V NiCd sub-C battery is rechargeable up to 1,000 times
- Multi-function on/off push button switch, 385 lumens

Stinger LED Rechargeable Flashlight

- Light source: C4 LED technology, with a 50,000 hour lifetime
- 3-Cell, 3.6V nickel-cadmium sub-C battery is rechargeable up to 1,000 times
- 175 lumens
- 10 hours to fully recharge or 2.5 hour fast charger available
- Deep-dish parabolic reflector
- Machined aircraft aluminum body with non-slip rubberized comfort grip and anti-roll rubber ring
- Unbreakable polycarbonate lens with scratch-resistant coating
- 8.41" long, 12.4 oz.
- IPX4 rated for water-resistant operation
- Serialized for positive identification
- Black

Streamlight #	Description
75710	Stinger LED Flashlight without Charger
75715	Stinger LED Flashlight w/DC Fast Charger



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Streamlight #	Description
25006	SI-20XP Rechargeable Flashlight with Charge Cord and Case, Black

SL-20XP Rechargeable Flashlight

- 8 Watt halogen bulb with 100 hour lifetime
- Lightweight nylon polymer case with non-slip rubber comfort grip
- Runs 1.5 hours, 145 lumens
- Three position push-button switch
- 5-Cell, 6.0-volt NiCd sub-C battery, rechargeable up to 1,000 times
- 13" long, water-resistant

Stinger DS LED HP Rechargeable Flashlight

- Dual switch technology
- Head switch operates independently from the tail cap switch
- Deep-dish parabolic reflector produces a long range targeting beam
- 350 Lumens
- 6,000 series machined aircraft aluminum with non-slip rubberized comfort grip
- Unbreakable polycarbonate lens with scratch-resistant coating
- O-ring sealed construction
- C4 LED Technology, impervious to shock with a 50,000 hour lifetime
- 3-Cell, 3.6V Ni-Cd sub-C battery is rechargeable up to 1,000 times

Streamlight #	Description
75863	Stinger DS LED HP Rechargeable Flashlight 120V AC/12V DC Black



Streamlight #	Description
74301	Strion LED Rechargeable Flashlight w/120V AC/DC Holder, Black
74303	Strion LED Rechargeable Flashlight w/120V AC, Black

Strion LED Rechargeable Flashlight

- C4 LED Technology, shock-resistant with a 50,000 hour lifetime
- 4-Modes: high (260 lumens), medium (130 lumens), low (65 lumens), and strobe
- Machined aircraft aluminum with anodized finish
- 5.90" long
- Push-button tailcap momentary switch; rotate tailcap constant on
- Lithium ion with on-board safety control circuit battery
- Snap-in charger holder that mounts in any position
- Water-resistant

Stylus Pro Alkaline Battery-Powered Pen Light

- Corrosion and water resistant
- Machined aircraft-grade aluminum alloy, Type II MIL-Spec anodize plating
- C4 LED lasts 30,000 hours
- 65 lumens
- Push button tail switch
- Powered by two AAA alkaline batteries
- Runs up to 6.5 regulated hours
- 5.3", 1.64 oz. with battery (included)

Streamlight #	Description
66118	Stylus Pro, Black Pen Light



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

<h2 style="text-align: center;">ASTM Labeling Chart</h2> <h3 style="text-align: center;">Natural Rubber Electrical Insulating Gloves</h3>			
Class Color	Proof Test Voltage AC/DC	Max. Use Voltage AC/DC	Insulating Rubber Glove Label
00 Beige	2,500 / 10,000	500 / 750	10 ASTM D120 CLASS 00 MAX USE VOLT 500V AC EN60903 TYPE I 500V AC
0 Red	5,000 / 20,000	1,000 / 1,500	10 ASTM D120 CLASS 0 MAX USE VOLT 1000V AC EN60903 TYPE I 1000V AC
1 White	10,000 / 40,000	7,500 / 11,250	10 ASTM D120 CLASS 1 MAX USE VOLT 7500V AC EN60903 TYPE I 7500V AC
2 Yellow	20,000 / 50,000	17,000 / 25,500	10 ASTM D120 CLASS 2 MAX USE VOLT 17000V AC EN60903 TYPE I 17000V AC
3 Green	30,000 / 60,000	26,500 / 39,750	10 ASTM D120 CLASS 3 MAX USE VOLT 26500V AC EN60903 TYPE I 26500V AC
4 Orange	40,000 / 70,000	36,000 / 54,000	10 ASTM D120 CLASS 4 MAX USE VOLT 36000V AC EN60903 TYPE I 36000V AC




Measure the circumference around the palm to determine the correct glove size. Allow for additional room if fabric glove liners are to be worn, especially with thermal liners.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Sizing Linemen's Sleeves			
STRAIGHT ARM SLEEVE-Figure 1			
A (in.)	B (in.)	C (in.)	D (in.)
Regular			
26.25	15.5	11.25	5.5
Large			
28.5	17	12.87	6.87
Extra-Large			
30	19	13.25	6.87
CURVED ARM SLEEVE-Figure 2			
A (in.)	B (in.)	C (in.)	D (in.)
Regular			
26.5	15.5	12.25	5.25
Large			
27.75	16	12.87	6.87
Extra-Large			
29.5	17.5	12.87	7

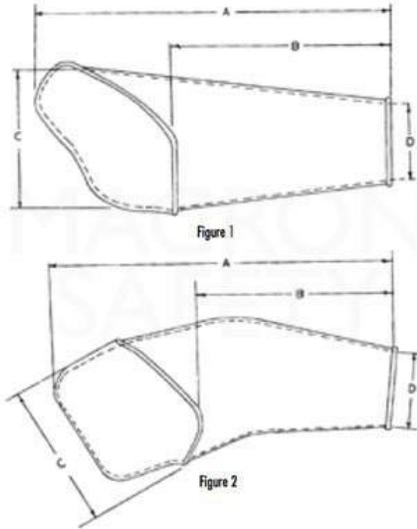

When choosing the proper sleeve size, they should fit comfortably, covering from the top of the shoulder to just inside the top of the glove. Select the shortest length possible while maintaining complete coverage to the shoulder.

This clearance table shows minimum distance allowed between protector glove cuff and the bead of the rubber glove, per ASTM F496 Specs.
Leather gloves are to be worn over rubber insulating gloves.

Minimum Distance from Protector and Rubber Glove	Glove Class	Leather Protector Cuff
		----- Cuff Line -----
00, 0	1/2	1/2" from cuff
1	1	1" from cuff
2	2	2" from cuff
3	3	3" from cuff
4	4	4" from cuff



Leather Protectors are NOT to be used alone for electric shock protection. Always use gloves with appropriately insulated voltage ratings.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleeetools.com

All Salisbury Gloves, Protectors and Sleeves shown are sold in pairs.

Glove, Class 00, 11", Type I

- Black and red gloves are TYPE I natural rubber
- Blue gloves are TYPE II synthetic rubber



Glove, Class 0, Blue, 11" or 14", Type II



Salisbury #	Size	Color
E0011B/7	7	Black
E0011B/8	8	Black
E0011B/8H	8H	Black
E0011B/9	9	Black
E0011B/9H	9H	Black
E0011B/10	10	Black
E0011B/10H	10H	Black
E0011B/11	11	Black
E0011B/12	12	Black
E0011BL/7	7	Blue
E0011BL/8	8	Blue
E0011BL/8H	8H	Blue
E0011BL/9	9	Blue

E0011BL/9H	9H	Blue
E0011BL/10	10	Blue
E0011BL/10H	10H	Blue
E0011BL/11	11	Blue
E0011BL/12	12	Blue
E0011R/7	7	Red
E0011R/8	8	Red
E0011R/8H	8H	Red
E0011R/9	9	Red
E0011R/9H	9H	Red
E0011R/10	10	Red
E0011R/10H	10H	Red
E0011R/11	11	Red
E0011R/12	12	Red

Salisbury #	Size	Class	Length
E011BL/7	7	0	11"
E011BL/8	8	0	11"
E011BL/8H	8H	0	11"
E011BL/9	9	0	11"
E011BL/9H	9H	0	11"
E011BL/10	10	0	11"
E011BL/10H	10H	0	11"
E011BL/11	11	0	11"
E011BL/12	12	0	11"
E014BL/8	8	0	14"
E014BL/8H	8H	0	14"
E014BL/9	9	0	14"
E014BL/9H	9H	0	14"
E014BL/10	10	0	14"
E014BL/10H	10H	0	14"
E014BL/11	11	0	14"
E014BL/12	12	0	14"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleeetools.com

Glove, Class 0, Black, 11", Type 1



SALISBURY
by Honeywell

Salisbury #	Size	Class	Length
E011B/8	8	0	11"
E011B/8H	8H	0	11"
E011B/9	9	0	11"
E011B/9H	9H	0	11"
E011B/10	10	0	11"
E011B/10H	10H	0	11"
E011B/11	11	0	11"
E011B/12	12	0	11"

GK0011B Glove Kit, Class 00 Includes Black 11" Gloves, Leather Protectors and Glove Bag



SALISBURY
by Honeywell

Salisbury #	Size		
GK0011B/7	7	GK0011B/9H	9H
GK0011B/8	8	GK0011B/10	10
GK0011B/8H	8H	GK0011B/10H	10H
GK0011B/9	9	GK0011B/11	11
		GK0011B/12	12

Glove, Class 0, Red 11" or 14", Type I



Salisbury #	Size	Class	Length
E011R/7	7	0	11"
E011R/8	8	0	11"
E011R/8H	8H	0	11"
E011R/9	9	0	11"
E011R/9H	9H	0	11"
E011R/10	10	0	11"
E011R/10H	10H	0	11"
E011R/11	11	0	11"
E011R/12	12	0	11"
E014R/7	7	0	14"
E014R/8	8	0	14"
E014R/9	9	0	14"
E014R/9H	9H	0	14"
E014R/10	10	0	14"
E014R/10H	10H	0	14"
E014R/11	11	0	14"
E014R/12	12	0	14"

SALISBURY
by Honeywell

Glove, Class 0, Yellow, 11", Type I



Salisbury #	Size	Class	Length
E011Y/7	7	0	11"
E011Y/8	8	0	11"
E011Y/8H	8H	0	11"
E011Y/9	9	0	11"
E011Y/9H	9H	0	11"
E011Y/10	10	0	11"
E011Y/10H	10H	0	11"
E011Y/11	11	0	11"
E011Y/12	12	0	11"
E014Y/7	7	0	14"
E014Y/8	8	0	14"
E014Y/8H	8H	0	14"
E014Y/9	9	0	14"
E014Y/9H	9H	0	14"
E014Y/10	10	0	14"
E014Y/10H	10H	0	14"
E014Y/11	11	0	14"
E014Y/12	12	0	14"

SALISBURY
by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

GK0011BL Glove Kit, Class 00 Includes Blue 11" Gloves, Leather Protectors and Glove Bag

GK0011R Glove Kit, Class 00 Includes Red 11" Gloves, Leather Protectors and Glove Bag

GK011B Glove Kit, Class 0 Includes Black 11" Gloves, Leather Protectors and Glove Bag

SALISBURY

by Honeywell



Salisbury #	Size
GK0011BL/7	7
GK0011BL/8	8
GK0011BL/8H	8H
GK0011BL/9	9
GK0011BL/9H	9H
GK0011BL/10	10
GK0011BL/10H	10H
GK0011BL/11	11



SALISBURY

by Honeywell

Salisbury #	Size
GK0011R/7	7
GK0011R/8	8
GK0011R/8H	8H
GK0011R/9	9
GK0011R/9H	9H
GK0011R/10	10
GK0011R/10H	10H
GK0011R/11	11
GK0011R/12	12



SALISBURY

by Honeywell

Salisbury #	Size
GK011B/8	8
GK011B/8H	8H
GK011B/9	9
GK011B/9H	9H
GK011B/10	10
GK011B/10H	10H
GK011B/11	11
GK011B/12	12

GK011BL Glove Kit, Class 0 Includes Blue 11" Gloves, Leather Protectors and Glove Bag



SALISBURY

by Honeywell

Salisbury #	Size
GK011BL/7	7
GK011BL/8	8
GK011BL/8H	8H
GK011BL/9	9
GK011BL/9H	9H
GK011BL/10	10
GK011BL/10H	10H
GK011BL/11	11
GK011BL/12	12

GK011R Glove Kit, Class 0 Includes Red 11" Gloves, Leather Protectors and Glove Bag



SALISBURY

by Honeywell

Salisbury #	Size
GK011R/7	7
GK011R/8	8
GK011R/8H	8H
GK011R/9	9
GK011R/9H	9H
GK011R/10	10
GK011R/10H	10H
GK011R/11	11



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialflettools.com

Glove, Red/Black, Straight Cuff



SALISBURY
by Honeywell

Salisbury #	Size	Class	Length
E114RB/8	8	1	14"
E114RB/8H	8H	1	14"
E114RB/9	9	1	14"
E114RB/9H	9H	1	14"
E114RB/10	10	1	14"
E114RB/10H	10H	1	14"
E114RB/11	11	1	14"
E114RB/12	12	1	14"
E214RB/8	8	2	14"
E214RB/8H	8H	2	14"
E214RB/9	9	2	14"
E214RB/9H	9H	2	14"
E214RB/10	10	2	14"
E214RB/10H	10H	2	14"
E214RB/11	11	2	14"
E214RB/12	12	2	14"
E216RB/7	7	2	16"
E216RB/8	8	2	16"

E216RB/8H	8H	2	16"
E216RB/9	9	2	16"
E216RB/9H	9H	2	16"
E216RB/10	10	2	16"
E216RB/10H	10H	2	16"
E216RB/11	11	2	16"
E216RB/12	12	2	16"
E316RB/8	8	3	16"
E316RB/8H	8H	3	16"
E316RB/9	9	3	16"
E316RB/9H	9H	3	16"
E316RB/10	10	3	16"
E316RB/10H	10H	3	16"
E316RB/11	11	3	16"
E316RB/12	12	3	16"
E418RB/9	9	4	18"
E418RB/9H	9H	4	18"
E418RB/10	10	4	18"
E418RB/10H	10H	4	18"
E418RB/11	11	4	18"

GK011Y Glove Kit, Class 0 Includes Yellow 11" Gloves, Leather Protectors and Glove Bag

Glove, Red/Black, Contour Cuff



SALISBURY
by Honeywell

Salisbury #	Size	Class	Length
E218CRB/7	7	2	18"
E218CRB/8	8	2	18"
E218CRB/8H	8H	2	18"
E218CRB/9	9	2	18"
E218CRB/9H	9H	2	18"
E218CRB/10	10	2	18"
E218CRB/10H	10H	2	18"
E218CRB/11	11	2	18"
E218CRB/12	12	2	18"
E318CRB/8	8	3	18"
E318CRB/8H	8H	3	18"
E318CRB/9	9	3	18"
E318CRB/9H	9H	3	18"
E318CRB/10	10	3	18"
E318CRB/10H	10H	3	18"
E318CRB/11	11	3	18"
E318CRB/12	12	3	18"

Salisbury #	Size
GK011Y/7	7
GK011Y/8	8
GK011Y/8H	8H
GK011Y/9	9
GK011Y/9H	9H
GK011Y/10	10
GK011Y/10H	10H
GK011Y/11	11
GK011Y/12	12



SALISBURY
by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Glove, Red/Black, Bell Cuff



SALISBURY

by Honeywell

Salisbury #	Size	Class	Length
E214BCRB/9	9	2	14"
E214BCRB/9H	9H	2	14"
E214BCRB/10	10	2	14"
E214BCRB/10H	10H	2	14"
E214BCRB/11	11	2	14"
E216BCRB/9	9	2	16"
E216BCRB/9H	9H	2	16"
E216BCRB/10	10	2	16"
E216BCRB/10H	10H	2	16"
E216BCRB/11	11	2	16"
E216BCRB/12	12	2	16"
E218BCRB/9	9	2	18"
E218BCRB/9H	9H	2	18"
E218BCRB/10	10	2	18"
E218BCRB/10H	10H	2	18"
E218BCRB/11	11	2	18"
E218BCRB/12	12	2	18"
E316BCRB/9	9	3	16"
E316BCRB/9H	9H	3	16"
E316BCRB/10	10	3	16"
E316BCRB/10H	10H	3	16"
E316BCRB/11	11	3	16"

Glove, Black, Straight Cuff

Salisbury #	Size	Class	Length
E116B/7	7	1	16"
E116B/8	8	1	16"
E116B/8H	8H	1	16"
E116B/9	9	1	16"
E116B/9H	9H	1	16"
E116B/10	10	1	16"
E116B/10H	10H	1	16"
E116B/11	11	1	16"



SALISBURY

by Honeywell



SALISBURY

by Honeywell

Glove, Red/Black, Straight Cuff

Glove, Red/Black, Contour Cuff



Salisbury #	Size	Class	Length
E318CRB/8	8	3	18"
E318CRB/8H	8H	3	18"
E318CRB/9	9	3	18"
E318CRB/9H	9H	3	18"
E318CRB/10	10	3	18"
E318CRB/10H	10H	3	18"
E318CRB/11	11	3	18"
E318CRB/12	12	3	18"

SALISBURY

by Honeywell

Salisbury #	Size	Class	Length
E218RB/8	8	2	18"
E218RB/8H	8H	2	18"
E218RB/9	9	2	18"
E218RB/9H	9H	2	18"
E218RB/10	10	2	18"
E218RB/10H	10H	2	18"
E218RB/11	11	2	18"
E218RB/12	12	2	18"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Leather Protector, Cowhide, OAL 14"

- Top grain cowhide
- Provides excellent protection for rubber insulating gloves
- Features adjustable strap with non-metallic buckles
- Orange cuff



SALISBURY
by Honeywell

Salisbury #	Size
ILP5S/8	8/8H
ILP5S/9	9/9H
ILP5S/10	10/10H
ILP5S/11	11/11H
ILP5S/12	12

Leather Protector, Cowhide, OAL 12"

- Top grain cowhide
- Provides excellent protection for rubber insulating gloves
- Orange cuff



SALISBURY
by Honeywell

Salisbury #	Size
ILP3S/8	8/8H
ILP3S/9	9/9H
ILP3S/10	10/10H
ILP3S/11	11/11H
ILP3S/12	12

GK214YB Glove Kit, Class 2 Includes 14" Yel/Blk Gloves, Leather Protectors and Glove Bag



Salisbury #	Size	Type
GK214YB/8	8	Straight Cuff
GK214YB/8H	8H	Straight Cuff
GK214YB/9	9	Straight Cuff
GK214YB/9H	9H	Straight Cuff
GK214YB/10	10	Straight Cuff
GK214YB/10H	10H	Straight Cuff
GK214YB/11	11	Straight Cuff
GK214BCYB/9H	9H	Bell Cuff
GK214BCYB/10	10	Bell Cuff
GK214BCYB/10H	10H	Bell Cuff
GK214BCYB/11	11	Bell Cuff
GK214BCYB/12	12	Bell Cuff

Leather Protector, Goatskin, OAL 10"

- Top grain goatskin
- Pull strap with non-metal buckle
- Provides excellent protection for rubber insulating gloves
- For Class 0 or 00 rubber gloves



SALISBURY
by Honeywell

Salisbury #	Size
ILPG10A/7	7
ILPG10A/8	8/8H
ILPG10A/9	9/9H
ILPG10A/10	10/10H
ILPG10A/11	11/11H
ILPG10A/12	12

Glove and Sleeve Bag

- Heavy duty canvas
- Hook and loop closure
- Double stitched rolled edges add extra strength
- Grommet holes in the bottom of bag for ventilation
- Back snap for hanging



Buckingham #	Description
521	Glove Pocked Measures 17" x 4", Sleeve Pocket Measured 20" x 4"



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Sleeve and Combo Bags

- Canvas duck with double stitching
- Flap over top with snap fasteners
- Reinforced quick-release snap for attachment to belt
- Grommets in the bottom provide drainage



Estex #	Description
2449-CE	12" x 4" x 29.5", Sleeve Bag, Canvas
2449-TU-C	12" x 4" x 29", Combo Sleeve and Glove Bag, Canvas
2449-TU-V	12" x 4" x 29", Combo Sleeve and Glove Bag, Vinyl

Glove Bag, 1-Pocket

- Canvas duck with double stitching
- Flap over top with snap fasteners
- Reinforced quick-release snap for attachment to belt
- Grommets in the bottom provides drainage



Estex #	Description
2210	8" x 2" x 12", for 11" Gloves
2220	8" x 4" x 15", for 14" Gloves
2223	8" x 4" x 18", for 16" Gloves
2226	8" x 4" x 20", for 18" Gloves

Line Hose Bag

- Rated at 80 lbs. working load limit
- Heavy weight canvas duck
- Black engineered polymer bottom
- Drainage holes
- Polymer ring, IZOD impact strength, 0.65 ft lbs. per in as per ASTM D256
- Brass swivel snap



Estex #	Description
1950-60	12" x 60"
1950-66	12" x 66"
1950-96	12" x 96"

Dipped Sleeve, Red/Yellow, Extra Curved Arm



by Honeywell

Salisbury #	Size	Class
D2RRY-EC	Reg	2
D2LRY-EC	Large	2
D2XLRY-EC	X-Large	2
D3RRY-EC	Reg	3
D3LRY-EC	Large	3
D3XLRY-EC	X-Large	3

Dipped Sleeve, Straight Arm



by Honeywell

Salisbury #	Size	Class	Color
D2RRB-ST	Reg	2	Red/Black
D2LRB-ST	Large	2	Red/Black
D2XLRB-ST	X-Large	2	Red/Black
D2RYB-ST	Reg	2	Yellow/Black
D2LYB-ST	Large	2	Yellow/Black
D2XLYB-ST	X-Large	2	Yellow/Black



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

SALISBURY

by Honeywell



**Dipped Sleeve,
Extra Curved Arm**

Salisbury #	Size	Class	Color
D2RRB-EC	Reg	2	Red/Black
D2LRB-EC	Large	2	Red/Black
D2XLRB-EC	X-Large	2	Red/Black
D3RRB-EC	Reg	3	Red/Black
D3LRB-EC	Large	3	Red/Black
D3XLRB-EC	X-Large	3	Red/Black
D2RRY-EC	Reg	2	Red/Yellow
D2LRY-EC	Large	2	Red/Yellow
D2XLRY-EC	X-Large	2	Red/Yellow

Molded Sleeves



SALISBURY

by Honeywell

Salisbury #	Size	Class	Color
2RY	Reg	2	Yellow
2LY	Large	2	Yellow
2XLY	X-Large	2	Yellow
2RB	Reg	2	Black
2LB	Large	2	Black
2XLB	X-Large	2	Black
3RY	Reg	3	Yellow
3LY	Large	3	Yellow
3XLY	X-Large	3	Yellow

Slotted Style Blanket

- Type II SALCOR
- Reinforced beaded edge and 28 eyelets



Salisbury #	Description
15	22" x 22", Orange, ASTM Class 4, Type II
1100	36" x 36", Black, ASTM Class 2, Type II
1300	36" x 36", Orange, ASTM Class 4, Type II

Solid Eyelet Style Blanket

- Type II SALCOR or Type 1 natural rubber
- Reinforced beaded edge and eyelets



Salisbury #	Description
13	22" x 22", Orange, ASTM Class 4, Type II, 28 Eyelets
1000E	27" x 36", Orange, ASTM Class 4, Type II, 6 Eyelets
300E	36" x 36", Orange, ASTM Class 2, Type I, 6 Eyelets
900E	36" x 36", Orange, ASTM Class 4, Type II, 6 Eyelets
901E	36" x 36", Black, ASTM Class 4, Type II, 6 Eyelets

SALISBURY

by Honeywell

SALISBURY

by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Switchboard Matting

- Placed permanently in front of switchgear, motor control centers and other high voltage apparatus
- Corrugated surface acts as safety tread
- ASTM Class 2



SALISBURY
by Honeywell

Salisbury #	Description
M30-2	Class 2, 1/4" x 30" x 25 yds
M36-2	Class 2, 1/4" x 36" x 25 yds
M48-2	Class 2, 1/4" x 48" x 25 yds

Roll Blanket

- Made from a high strength fabric reinforced type II rubber
- Easy to cut
- Flexible to -40°F/C
- Highly puncture and tear resistant
- ASTM Class 0 or 1



SALISBURY
by Honeywell

Salisbury #	Description
RLB0	3' x 30', Yellow, Class 0
RLB1	3' x 30', Yellow/Orange, Class 1
RLBPVC1-36	3' x 30', Clear PVC, Class 1
RLBPVC1-48	4' x 30', Clear PVC, Class 1

Straight Line Hose, Conventional System

- Flexible in cold weather; not damaged by ozone or ultraviolet rays
- RIB-GRIP Locking System
- Type II SALCOR
- ASTM Class 2 or 3



SALISBURY
by Honeywell

Salisbury #	ID x Length	Case	Type
OR100-6	1" x 6"	2	II
OR125-45	1.25" x 4.5"	2	II
OR125-6	1.25" x 6"	2	II
OR150-6	1.5" x 6"	3	II

Connector End Line Hose, Conventional System

- Flexible in cold weather; not damaged by ozone or ultraviolet rays
- RIB-GRIP Locking System
- Type II SALCOR
- ASTM Class 2 or 3



SALISBURY
by Honeywell

Salisbury #	ID x Length	Class	Type
OR100-6C	1" x 6"	2	II
OR100-45C	1" x 4.5"	2	II
OR125-45C	1.25" x 4.5"	2	II
OR125-6C	1.25" x 6"	2	II
OR150-45C	1.5" x 4.5"	3	II
OR150-6C	1.5" x 6"	3	II



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Insulator Cover, Conventional System

- Orange, weather resistant Type II SALCOR
- RIB-GRIP Locking System
- Large Diameter arm overlaps the small arm to provide complete insulation
- ASTM Class 2 or 3

SALISBURY

by Honeywell



Salisbury #	Description
OJRG	16" x 6.5", Class 2, for Use with Insulator Class 55-4, 1" Line Hose Size
OKRG	16" x 8", Class 3, for Use with Insulator Class 55-5, Line Hose Size 1.25", 1.5"

Connector End Line Hose, Extended Lip SU System

- Flexible in cold weather; not damaged by ozone or ultraviolet rays
- RIB-GRIP Locking System
- Type II SALCOR
- ASTM Class 4

SALISBURY

by Honeywell



Salisbury #	ID x Length	Class	Type
SU150-45C	1.5" x 4.5"	4	II
SU150-6C	1.5" x 6"	4	II

Dead End Protector, Extended Lip SU System

- Quickly cover dead-ends or polymer insulators
- RIB-GRIP Locking System
- Type II SALCOR
- ASTM Class 4
- The only complete flexible cover up for use on voltages through 34.5kV



SALISBURY

by Honeywell

Salisbury #	Description
OR134	5" x 37" Class 4 Type II, Fits Bell Size 3"-4.25", Orange

Straight Line Hose, Extended Lip SU System

- Flexible in cold weather; not damaged by ozone or ultraviolet rays
- RIB-GRIP Locking System
- Type II SALCOR
- ASTM Class 4

SALISBURY

by Honeywell




Salisbury #	ID x Length	Class	Type
SU150-45	1.5" x 4.5"	4	II
SU150-6	1.5" x 6"	4	II

Cross Arm Cover, Conventional System

- Reduces stress on line hose or jumpers
- Fits standard cross arm pin spacing and each unit has interior ribs to minimize shifting on the arm
- Type II SALCOR
- ASTM Class 2

Salisbury #	Description
145	Use on Cross Arms Up To 4" x 4.5", Class 2



SALISBURY

by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Cutout Cover, Conventional System

- Can be used for overhead cutouts as well as for underground pad-mount applications
- Type II SALCOR
- ASTM Class 2 or 4



SALISBURY

by Honeywell

Salisbury #	Description
CC24	24" x 15" x 3.5", Class 2
CC30	30" x 20" x 7", Class 4

Lightning Arrester Cover

- Can be applied with rubber gloves or hot stick
- Slot allows cap to fit directly over arrester and line connection
- Type II SALCOR
- ASTM Class 4




SALISBURY

by Honeywell

Salisbury #	ID x Length	Class	Type
536A	4.5" x 15"	4	II

Self-Securing Cable End Cap

- Keep moisture and contamination off trimmed cable ends
- For underground distribution
- Applied with rubber gloves
- Type II SALCOR
- ASTM Class 2

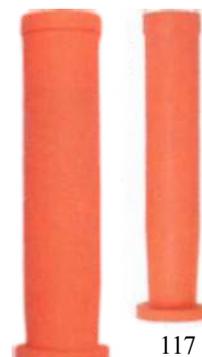

178

117

Salisbury #	ID x Length	Class	Type
117	1.38" x 10"	2	II
173	.81" x 6"	2	II
178	3.19" x 16"	2	II

SALISBURY

by Honeywell

Tagging Device

- Used to tag opened disconnect switches
- Fits over the head of switch sticks for application
- Molded orange SALCOR



Salisbury #	Description
TD	7.25" Long Slot: 2.13" x .63" Cup: 2.5" x 1.75"

SALISBURY

by Honeywell

Spade Cover

- Provide temporary insulation when working in pad mount transformers and other electrical apparatus
- Molded orange SALCOR
- ASTM Class 2



Salisbury #	Description
SC4	2.75" x 4.4" x 10.75", 1" Lip Extension
SC5	3" x 6" x 10", 2" Lip Extension

SALISBURY

by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Air Gap Pole Guard

- Installed before setting new poles to guard against accidental line contact
- Made from orange, Type I ABS, cold weather, high impact thermoplastic
- Drilled rope handles
- ASTM Class 4

Salisbury #	Length	Diameter	Class
2496	6'	9"	4
2466	6'	12"	4



SALISBURY
by Honeywell



SALISBURY
by Honeywell

Salisbury #	Description
2389	ABS/PVC 4' Stick Type III Class 4, Grade 1

Versa Guards

- Designed so that two guards can be coupled together to cover most 13 kV single and double arm, pin and post constructions, 3.92'

Polyethylene Line Guard

- 1/3 the weight of similar rubber hose
- Snap together feature with male and female connecting ends
- High visibility yellow color
- Large I.D. than traditional rubber hoses (1.77" compared to 1.25")
- Brush contact only

Hastings #	Description
6050	5', 15kV
6060	6', 15kv
6055	5', 25kV
6065	6', 25kV



HASTINGS
A WORLDWIDE SUPPLIER OF
Hot Line Tools & Equipment



SALISBURY
by Honeywell

Salisbury #	Description
21116	Standard Bushing Cover Only
21317	Tri-Port Bushing Cover Only

Silicone Bushing Covers

- Protect against wildlife contacts
- Ozone and UV resistant silicone rubber
- RUS Accepted

Rubber Overshoes

- Ozone resistant yellow rubber-100% waterproof
- Lined in fabric for easy slip on and off
- Available in whole and half sizes (6-12) and whole sizes (13-17)

Salisbury #	Description
51510	Deep Heel



SALISBURY
by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Overshoe Non-Buckle, Dielectric 20kV

- 100% Waterproof and made from premium grade ozone resistant rubber
- Non-skid bar tread outsole
- Deep heel cavity can lock onto ladder rungs
- 100% Tested to requirements of ASTM F1116
- Available in whole sizes (7-16) only



SALISBURY

by Honeywell

Salisbury #	Description	Size
51511/9	Non-Buckle Overshoe, Bob Sole	9
51511/10	Non-Buckle Overshoe, Bob Sole	10
51511/11	Non-Buckle Overshoe, Bob Sole	11
51511/12	Non-Buckle Overshoe, Bob Sole	12
51511/13	Non-Buckle Overshoe, Bob Sole	13
51511/14	Non-Buckle Overshoe, Bob Sole	14

Overshoe Non-Buckle, Dielectric 20kV

- Ozone resistant yellow rubber-100% waterproof
- Outsole t tested to ASTM F2413-05
- Available in whole sizes (6-17) only



SALISBURY

by Honeywell

Salisbury #	Description	Size
51581/9	Storm Rubber	9
51581/10	Storm Rubber	10
51581/11	Storm Rubber	11
51581/12	Storm Rubber	12
51581/13	Storm Rubber	13
51581/14	Storm Rubber	14
51581/15	Storm Rubber	15

17" Full Cut Overboot, Dielectric 20kV

- Ozone resistant yellow rubber-100% waterproof
- Outsole tested to ASTM F2413-05
- Anti-skid bar tread sole
- Available in whole sizes (7-17) only



SALISBURY

by Honeywell

Salisbury #	Description	Size
21402/9	Full Cut Overshoe, 17"	9
21402/10	Full Cut Overshoe, 17"	10
21402/11	Full Cut Overshoe, 17"	11
21402/12	Full Cut Overshoe, 17"	12
21402/13	Full Cut Overshoe, 17"	13
21402/14	Full Cut Overshoe, 17"	14
21402/15	Full Cut Overshoe, 17"	15



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Overshoe 2-Buckle, Dielectric 20kV

- 100% Waterproof and made from premium grade ozone resistant rubber
- Non-skid bar tread outsole
- Deep heel cavity can lock onto ladder rungs
- 100% Tested to requirements of ASTM F1116
- Available in whole sizes (7-17) only

Salisbury #	Description	Size
51512/9	2-Buckle Overshoe, Bob Sole	9
51512/10	2-Buckle Overshoe, Bob Sole	10
51512/11	2-Buckle Overshoe, Bob Sole	11
51512/12	2-Buckle Overshoe, Bob Sole	12
51512/13	2-Buckle Overshoe, Bob Sole	13
51512/14	2-Buckle Overshoe, Bob Sole	14
51512/15	2-Buckle Overshoe, Bob Sole	15



SALISBURY
by Honeywell



SALISBURY
by Honeywell

Salisbury #	Description	Size
21405/11	Full Cut Overboot, 17"	11
21405/12	Full Cut Overboot, 17"	12
21405/13	Full Cut Overboot, 17"	13
21405/14	Full Cut Overboot, 17"	14
21405/15	Full Cut Overboot, 17"	15

Dielectric 17" Full Cut Overboot, 20kV

- 100% Waterproof and made from premium grade ozone resistant rubber
- Non-skid bar tread outsole
- Deep heel cavity can lock onto ladder rungs
- 100% Tested to requirements of ASTM F1116
- Available in whole sizes (7-16) only

Ten-Four Glove Dust

- Absorbs moisture and perspiration when wearing rubber gloves

Salisbury #	Description
10-4	5 oz. Squeeze Bottle



SALISBURY
by Honeywell

Super SALCO Detergent

- Concentrated detergent with grease release formula
- Suitable for washing rubber gloves, sleeves and other specialty equipment

Salisbury #	Description
S4	1 gal Jug
S5	5 gal Drum



SALISBURY
by Honeywell

SALCON Silicone Spray

- Reduces friction on SALCOR or natural rubber products
- May be used to spray spark plugs and battery terminals in damp weather

Salisbury #	Description
S99	16 oz. Aerosol Can



SALISBURY
by Honeywell



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



Polywater #	Size
RBG-D72	72-Count Saturated Wipe Dispenser
RBG-1	Individual Saturated Wipe
RBG-35LR	1 qt. Bottle with Sprayer
RBG-128	1 gal. Bottle
RBG-640	5 gal. Pail

Rubber Goods Cleaner

- Specially formulated water-based cleaner for removing dirt, grease and grime from lineman’s gloves, sleeves, jumper cables and other rubber goods
- Safe for use on all natural and synthetic rubbers
- Contains no hazardous ingredients and is pH neutral
- Completely biodegradable and safe for the environment

Blanket Accessories



25

Blanket Canister



MB6



HS21



21



20

Salisbury #	Description
20	8.5” Wood Blanket Clamp Pin w/Pin Boots
21	9.5” Nylon Blanket Clamp Pin w/Pin Boots
25	7” Wood Blanket Clamp Pin w/o Pin Boots
HS21	9.5” Nylon Blanket Clamp Pin w/Pin Boots
MB6	Magnetic Blanket Button
P2	5” x 37” Orange, Hi-Impact Polyethylene Blanket Canister for 1-2 Blankets
P4	7” x 37” Orange, Hi-Impact Polyethylene Blanket Canister for 1-4 Blankets
P6	9” x 37” Orange, Hi-Impact Polyethylene Blanket Canister for 1-6 Blankets

SALISBURY

by Honeywell

Sleeve Accessories



SALISBURY

by Honeywell



Salisbury #	Description
B-22	Two-Piece Sleeve Buttons (4)
H1-NB	Sleeve Harness w/o Buttons
S1	15” Sleeve Strap w/Buttons
S1-NB	15” Sleeve Strap w/o Buttons



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Stinger Cover

- Protect against phase to phase and phase to ground wildlife contacts
- Can be installed without disconnecting the lead wire from the bushing
- Made from ozone and UV resistant SALCOR elastomer in grey color

Salisbury #	ID x Length
38-50SC	3/8" x 50'
38-100SC	3/8" x 100'
58-12SC	5/8" x 12'
58-50SC	5/8" x 50'
58-100SC	5/8" x 100'
34-12SC	3/4" x 12'
34-25SC	3/4" x 25'



SALISBURY
by Honeywell

Glove Accessories



SALISBURY
by Honeywell

Salisbury #	Description
G99	Glove Inflator Kit
G100	Glove Inflator Kit with Adapter
INF-2	Standard Bench Model Inflator with Air-Line Connection
INF-3	Standard Floor Model Inflator



Utility Solutions #	Pole Range	Length
USCP-001	6"-11" Diameter	16"
USCP-002	11"-20" Diameter	23"

Klondike Clamps

- Quickly and safely secures rubber blankets in position on poles without damaging the blankets
- Molded from tough weather-resistant polymer
- Assembled completely with stainless steel hardware

Wildlife ZapShield

- Designed for distribution substation equipment bushing of 15kV and 25kv
- Rauck-Shock technology engineered polymer
- Minimizes occurrences of animal related electric service interruptions
- Delivers non-lethal electrostatic discharge when contacted by animal

Rauckman #	Description
W-1525R	Red Wildlife Animal Guard
W-1525G	Gray Wildlife Animal Guard



RAUCKMAN
Utility Products



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com



TINGLEY
A TRADITION SINCE 1896

Tingley #	Sizes
O44122	S-5XL

Eclipse Overall

- Quad-Hazard, High Visibility
- Liquid Proof, Arc Flash and Flash Fire Protection
- Snap fly front
- Non-conductive hardware
- Heavy duty quick release buckles and crossover
- Hook & loop take-up straps on ankle cuffs for adjustable fit
- ASTM F2733, ASTM F1891, ANSI 107 Class 3

Eclipse Jacket

- Quad-Hazard protection, high visibility, liquid proof, arc flash and flash fire protection
- Thermo-Grid technology helps block out heat energy
- Chemically resistance to many acids, oils, alcohols, salts and alkalizes
- Overhead shoulder design for complete freedom of movement
- Zipper/storm fly front with snap closure and hidden hardware
- Oversized 3 piece hood with adjustable hook & loop take-up straps
- Non-conductive, non-corrosive hardware
- D-ring access for fall protection harness
- Hook & loop take-up straps on wrists for adjustable fit
- Adjustable elastic draw cord for added protection
- Full-vented cape back for improved air circulation
- ASTN F2733, ASTM F1891, ANSI 107 Class 3

Tingley #	Sizes
J44122	S-5XL



TINGLEY
A TRADITION SINCE 1896



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

SPECIAL FLEET SERVICE, INC.
 2500 S. MAIN STREET
 HARRISONBURG, VA 22801
 PHONE: 540-433-7727
 FAX: 540-438-9502

OUR NORMAL CREDIT TERMS: NET 30 DAYS

NAME OF FIRM OR INDIVIDUAL _____ YEARS AT THIS ADDRESS _____

NAME OF OWNER _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____ AREA CODE PHONE # _____

ACCOUNTING CONTACT: _____ FAX: _____

THE FOLLOWING INFORMATION MUST BE PROVIDED. IT WILL BE HELD IN THE STRICTEST CONFIDENCE.

FINANCE: _____
 BANK _____ BANK ADDRESS _____

BANK OFFICER OR DEPARTMENT _____ PHONE _____ FAX _____

REFERENCES:

1 _____
 BUSINESS NAME _____ COMPLETE ADDRESS _____ ZIP _____ PHONE _____ FAX _____

2 _____
 BUSINESS NAME _____ COMPLETE ADDRESS _____ ZIP _____ PHONE _____ FAX _____

3 _____
 BUSINESS NAME _____ COMPLETE ADDRESS _____ ZIP _____ PHONE _____ FAX _____

4 _____
 BUSINESS NAME _____ COMPLETE ADDRESS _____ ZIP _____ PHONE _____ FAX _____

***** IF TAX EXEMPT, PLEASE PROVIDE EXEMPTION FORM



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Customer Info: _____

Bill To: (if different): _____

Purchase Order #: _____

Date: _____

Contact Person: _____

Phone #: _____

	<u>Class 00</u>	<u>Class 0</u>	<u>Class 1</u>	<u>Class 2</u>	<u>Class 3</u>	<u>Class 4</u>
Pairs of Gloves	_____	_____	_____	_____	_____	_____
Pairs of Sleeves	_____	_____	_____	_____	_____	_____
Number of Blankets	_____	_____	_____	_____	_____	_____
Number of Line Hose	_____	_____	_____	_____	_____	_____
Number of Hoods/Covers	_____	_____	_____	_____	_____	_____

Should we call you if items fail? _____ Should we replace failed items? _____ Should we return failed items? _____

Comments: _____

Signature: _____

Special Fleet Service: Tool & Safety Divisions

2500 S. Main Street
Harrisonburg, VA 22801



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Customer Info: _____

Bill To: (if different): _____

Purchase Order #: _____

Date: _____

Contact Person: _____

Phone #: _____

Description of item to be repaired: _____

Mfg # and Name: _____

Serial #: _____

Under Warranty?: _____

of Batteries: _____

Tool Accessories Included: _____

Reason for Repair: _____

SFS Tool Repair Policies:

- There will be a charge for estimates if the customer requires an estimate on every tool before it is repaired and if the tool is not repaired or replaced in 30 days.
- If the cost of the repair on the tool is 50% or less of the replacement value, we will proceed with the repair unless otherwise agreed upon
- If the cost of the repair exceeds 50% we will notify you for approval prior to repair

Signature: _____

Special Fleet Service: Tool & Safety Divisions

2500 S. Main Street

Harrisonburg, VA 22801



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Customer Info: _____

Bill To: (if different): _____

Purchase Order #: _____

Date: _____

Contact Person: _____

Phone #: _____

Cable Size (#2, 1/0, 2/0, 4/0): _____

Cable Color (Clear or Yellow): _____

Cable Length: _____

Clamp Part #: _____

OR

C-Clamp (Include Largest Conductor to be used on): _____

Duckbill (Include Largest Conductor to be used on): _____

Flatface (Eye Screw or T-Handle): _____

Bus Clamp (Include Largest Bus to be used on): _____

All-Angle Clamp: _____

Ball Stud Clamp: _____

Customer is responsible for specifying if they need unshrouded ferrules with heat shrink tubing instead of shrouded ferrules

Signature: _____

Special Fleet Service: Tool & Safety Divisions

2500 S. Main Street

Harrisonburg, VA 22801



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Customer Info: _____ Bill To: (if different): _____

Purchase Order #: _____ Date: _____
 Contact Person: _____ Phone #: _____

Cable Size (#2=200A, 1/0=250A, 2/0=300A, 4/0=400A): _____

Voltage (15KV, 25KV, 35KV): _____

Cable Length: _____

Jumper Head (Orange or Clear): _____

Largest conductor that the head will need to fit: _____

For Ground Clamps Installed (C-Clamp or Duckbill): _____

Largest conductor that the clamp will need to fit: _____

Signature: _____

Special Fleet Service: Tool & Safety Divisions

2500 S. Main Street

Harrisonburg, VA 22801



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

ACSR (Aluminum Conductor Steel Reinforced)

For Cable Diameter

4 AWG - 636 MCM

.250" - .953" (6.35 mm - 24.21 mm)

MAXIMUM SAFE LOAD

See facing page
for grip details.

AWG or MCM Cable Size	Diameter inches (mm)	No. of Alum. & Steel Strands	Code Word	MAXIMUM SAFE LOAD			
				A 4,500 lbs (2041 kg)	B 8,000 lbs (3629 kg)	C 15,000 lbs (6803 kg)	D 20,000 lbs (9072 kg)
				Cat. No.	Cat. No.	Cat. No.	Cat. No.
4	.250" (6.35 mm)	6 x 1	Swan	1656-20, 1656-20H & S1656-20H			
4	.257" (6.53 mm)	7 x 1	Swanate	1656-20, 1656-20H & S1656-20H			
2	.316" (8.03 mm)	6 x 1	Sparrow	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H & S1656-30H		1628-16PE*	
2	.325" (8.26 mm)	7 x 1	Sparate	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H & S1656-30H		1628-16PE*	
1	.354" (9.02 mm)	6 x 1	Robin	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H & S1656-30H		1628-16PF*	
1/0	.398" (10.11 mm)	6 x 1	Raven	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H & S1656-30H		1628-16PG*	
2/0	.447" (11.35 mm)	6 x 1	Ouail	1656-30, 1656-30H & S1656-30H		1628-16PG*	
3/0	.502" (12.75 mm)	6 x 1	Pigeon	1656-30, 1656-30H & S1656-30H		1628-16PH*	
4/0	.563" (14.30 mm)	6 x 1	Penguin		1656-40, 1656-40H & S1656-40H	1628-16PI*	
266.8 MCM	.609" (15.47 mm)	18 x 1	Waxwing		1656-40, 1656-40H & S1656-40H	1628-16PJ*	
266.8 MCM	.642" (16.31 mm)	26 x 7	Partridge		1656-40, 1656-40H & S1656-40H	1628-16PK*	
300 MCM	.680" (17.27 mm)	26 x 7	Ostrich		1656-40, 1656-40H & S1656-40H	1628-16PK*	
336.4 MCM	.684" (17.37 mm)	18 x 1	Merlin		1656-40, 1656-40H & S1656-40H	1628-16PK*	
336.4 MCM	.720" (18.31 mm)	26 x 7	Linnet		1656-40, 1656-40H & S1656-40H	1628-16PL*	
336.4 MCM	.741" (18.82 mm)	30 x 7	Oriole			1628-16PL*	
397.5 MCM	.743" (18.87 mm)	18 x 1	Chickadee		1656-50, 1656-50H & S1656-50H	1628-16PL*	
397.5 MCM	.772" (19.61 mm)	24 x 7	Brant		1656-50, 1656-50H & S1656-50H	1628-16PM*	
397.5 MCM	.783" (19.89 mm)	26 x 7	Ibis		1656-50, 1656-50H & S1656-50H	1628-16PM*	
397.5 MCM	.806" (20.47 mm)	30 x 7	Lark		1656-50, 1656-50H & S1656-50H	1628-16PM*	
477 MCM	.814" (20.68 mm)	18 x 1	Pelican		1656-50, 1656-50H & S1656-50H	1628-16PM*	
477 MCM	.846" (21.49 mm)	24 x 7	Flicker		1656-50, 1656-50H & S1656-50H	1628-16PN*	1628-30N*
477 MCM	.858" (21.79 mm)	26 x 7	Hawk		1656-50, 1656-50H & S1656-50H	1628-16PN*	1628-30N*
556.5 MCM	.879" (22.33 mm)	18 x 1	Osprey		1656-60, 1656-60H & S1656-60H	1628-16PN*	1628-30N*
477 MCM	.883" (22.43 mm)	30 x 7	Hen		1656-60, 1656-60H & S1656-60H	1628-16PN*	1628-30N*
556.5 MCM	.914" (23.22 mm)	24 x 7	Parakeet		1656-60, 1656-60H and S1656-60H		1628-300*
556.5 MCM	.927" (23.55 mm)	26 x 7	Dove		1656-60, 1656-60H & S1656-60H		1628-300*
636 MCM	.940" (23.88 mm)	18 x 1	Kingbird		1656-60, 1656-60H & S1656-60H		1628-300*
556.5 MCM	.953" (24.21 mm)	30 x 7	Eagle		1656-60, 1656-60H & S1656-60H		1628-300*
605 MCM	.953" (24.21 mm)	24 x 7	Peacock		1656-60, 1656-60H & S1656-60H		1628-300*

"S" is for spring. "H" is for hot latch.

*Special order only. Please allow 30 days for delivery. These are not returnable.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

ACSR (Aluminum Conductor Steel Reinforced)

For Cable Diameter

605 - 2515 MCM

.966" - 1.88" (24.54 mm - 47.75 mm)

MAXIMUM SAFE LOAD

See facing page
for grip details.

MCM Cable Size	Diameter inches (mm)	No. of Alum. & Steel Strands	Code Word	MAXIMUM SAFE LOAD				
				A 5,500 lbs (2,495 kg) Cat. No.	B 8,000 lbs (3,636 kg) Cat. No.	C 20,000 lbs (9,072 kg) Cat. No.	D 25,000 lbs (11,340 kg) Cat. No.	E 25,000 lbs. with bolt on jaw (11,340 kg) Cat. No.
605 MCM	.966" (24.54 mm)	26 x 7	Squab		1678-20	1628-30P*		1628-50P*
636 MCM	.977" (24.82 mm)	24 x 7	Rook		1678-20	1628-30P*		1628-50P*
636 MCM	.991" (25.15 mm)	26 x 7	Grosbeak		1678-20	1628-30P*		1628-50P*
605 MCM	.994" (25.25 mm)	30 x 19	Teal		1678-20	1628-30P*		1628-50P*
605 MCM	.994" (25.25 mm)	30 x 7	Wood Duck		1678-20	1628-30P*		1628-50P*
666.6 MCM	1.00" (25.40 mm)	24 x 7	Flamingo		1678-20	1628-30P*		1628-50P*
666.6 MCM	1.014" (25.76 mm)	26 x 7	Gannet		1678-20	1628-30P*		1628-50P*
636 MCM	1.019" (25.88 mm)	30 x 19	Egret		1678-20	1628-30R*		1628-50R*
636 MCM	1.019" (25.88 mm)	30 x 7	Scoter		1678-20	1628-30R*		1628-50R*
795 MCM	1.040" (26.41 mm)	36 x 1	Coot	1678-30		1628-30R*		1628-50R*
715.5 MCM	1.051" (26.70 mm)	26 x 7	Starling	1678-30		1628-30R*		1628-50R*
795 MCM	1.063" (27.00 mm)	45 x 7	Tern	1678-30		1628-30R*		1628-50R*
715.5 MCM	1.081" (27.46 mm)	30 x 19	Redwing	1678-40		1628-30S*		1628-50S*
795 MCM	1.092" (27.76 mm)	54 x 7	Condor	1678-40		1628-30S*		1628-50S*
795 MCM	1.092" (27.74 mm)	24 x 7	Cuckoo	1678-40		1628-30S*		1628-50S*
795 MCM	1.107" (28.14 mm)	26 x 7	Drake	1678-40		1628-30S*		1628-50S*
900 MCM	1.131" (28.73 mm)	45 x 7	Ruddy	1678-40		1628-30S*		1628-50S*
795 MCM	1.140" (28.96 mm)	30 x 19	Mallard	1678-40		1628-30S*		1628-50S*
900 MCM	1.162" (29.51 mm)	54 x 7	Canary	1678-50		1628-30T*		1628-50T*
954 MCM	1.165" (29.59 mm)	20 x 7	Corncrake	1678-50		1628-30T*		1628-50T*
954 MCM	1.165" (29.59 mm)	45 x 7	Rail	1678-50		1628-30T*		1628-50T*
954 MCM	1.175" (29.85 mm)	48 x 7	Towhee	1678-50		1628-30T*		1628-50T*
954 MCM	1.196" (30.38 mm)	54 x 7	Cardinal	1678-50		1628-30T*		1628-50T*
954 MCM	1.196" (30.38 mm)	24 x 7	Redbird	1678-50		1628-30T*		1628-50T*
1033.5 MCM	1.212" (30.81 mm)	45 x 7	Ortolan			1628-30U*	1628-40U*	1628-50U*
1033.5 MCM	1.245" (31.65 mm)	54 x 7	Curlew			1628-30U*	1628-40U*	1628-50U*
1113 MCM	1.258" (31.95 mm)	45 x 7	Bluejay			1628-30U*	1628-40U*	1628-50U*
1113 MCM	1.292" (32.84 mm)	54 x 19	Finch				1628-40W*	1628-50W*
1192.5 MCM	1.302" (33.07 mm)	45 x 7	Bunting				1628-40W*	1628-50W*
1272 MCM	1.317" (33.45 mm)	36 x 1	Skylark				1628-40W*	1628-50W*
1192.5 MCM	1.337" (33.99 mm)	54 x 19	Grackle				1628-40X*	1628-50X*
1272 MCM	1.345" (34.16 mm)	45 x 7	Bittern				1628-40X*	1628-50X*
1272 MCM	1.381" (35.10 mm)	54 x 19	Pheasant				1628-40X*	1628-50X*
1351.5 MCM	1.386" (35.20 mm)	45 x 7	Dipper				1628-40X*	1628-50X*
1351.5 MCM	1.424" (36.17 mm)	54 x 19	Martin				1628-40Y*	1628-50Y*
1431 MCM	1.427" (36.25 mm)	45 x 7	Bobolink				1628-40Y*	1628-50Y*
1431 MCM	1.465" (37.21 mm)	54 x 19	Plover				1628-40Z*	1628-50Z*
1590 MCM	1.504" (38.15 mm)	45 x 7	Lapwing				1628-40Z*	1628-50Z*
1590 MCM	1.544" (39.24 mm)	54 x 19	Falcon				1628-40A*	1628-50A*
1780 MCM	1.602" (40.69 mm)	84 x 19	Chukar					1628-50B*
2034.5 MCM	1.681" (42.70 mm)	72 x 7	Mockingbird					1628-50C*
2167 MCM	1.735" (44.12 mm)	72 x 7	Kiwi					1628-50D*
2156 MCM	1.762" (44.75 mm)	84 x 19	Bluebird					1628-50D*
2312 MCM	1.802" (45.77 mm)	76 x 19	Thrasher					1628-50E*
2515 MCM	1.88" (47.75 mm)	76 x 19	Joree					1628-50F*

*Special order only. Please allow 30 days for delivery. These are not returnable.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

AAC (All Aluminum Conductor)

For Cable Diameter

4 AWG - 650 MCM

.231" - .928" (5.87 mm - 23.57 mm)

MAXIMUM SAFE LOAD

See facing page
for grip details.

AWG or MCM Cable Size	Diameter inches (mm)	No. of Alum. Strands	Code Word	MAXIMUM SAFE LOAD			
				A 4,500 lbs (2041 kg)	B 8,000 lbs (3629 kg)	C 15,000 lbs (6803 kg)	D 20,000 lbs (9072 kg)
				Cat. No.	Cat. No.	Cat. No.	Cat. No.
4	.231' (5.87 mm)	7	Rose	1656-20, 1656-20H and S1656-20H			
2	.292' (7.42 mm)	7	Iris	1656-20, 1656-20H and S1656-20H			
1	.328' (8.33 mm)	7	Pansy	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H and S1656-30H		1628-16PE*	
1/0	.369' (9.36 mm)	7	Poppy	1656-20, 1656-20H, S1656-20H, 1656-30, 1656-30H and S1656-30H		1628-16PF*	
2/0	.414' (10.51 mm)	7	Aster	1656-30, 1656-30H and S1656-30H		1628-16PG*	
3/0	.465' (11.81 mm)	7	Phlox	1656-30, 1656-30H and S1656-30H		1628-16PH*	
4/0	.522' (13.25 mm)	7	Oxlip	1656-30, 1656-30H and S1656-30H		1628-16PI*	
250 MCM	.567' (14.40 mm)	7	Sneezewort		1656-40, 1656-40H and S1656-40H	1628-16PI*	
250 MCM	.574' (14.58 mm)	19	Valerian		1656-40, 1656-40H and S1656-40H	1628-16PI*	
266.8 MCM	.586' (14.88 mm)	7	Daisy		1656-40, 1656-40H and S1656-40H	1628-16PJ*	
266.8 MCM	.593' (15.05 mm)	19	Laurel		1656-40, 1656-40H and S1656-40H	1628-16PJ*	
300 MCM	.628' (15.95 mm)	19	Peony		1656-40, 1656-40H and S1656-40H	1628-16PJ*	
336.4 MCM	.665' (16.90 mm)	19	Tulip		1656-40, 1656-40H and S1656-40H	1628-16PK*	
350 MCM	.678' (17.22 mm)	19	Daffodil		1656-40, 1656-40H and S1656-40H	1628-16PK*	
397.5 MCM	.724' (18.38 mm)	19	Canna		1656-40, 1656-40H and S1656-40H	1628-16PL*	
450 MCM	.769' (19.53 mm)	19	Goldentuft		1656-50, 1656-50H and S1656-50H	1628-16PM*	
477 MCM	.792' (20.12 mm)	19	Cosmos		1656-50, 1656-50H and S1656-50H	1628-16PM*	
477 MCM	.794' (20.18 mm)	37	Syringa		1656-50, 1656-50H and S1656-50H	1628-16PM*	
500 MCM	.811' (20.60 mm)	19	Zinnia		1656-50, 1656-50H and S1656-50H	1628-16PM*	
500 MCM	.813' (20.65 mm)	37	Hyacinth		1656-50, 1656-50H and S1656-50H	1628-16PM*	
556.5 MCM	.856' (21.73 mm)	19	Dahlia		1656-50, 1656-50H and S1656-50H	1628-16PN*	1628-30N*
556.5 MCM	.858' (21.80 mm)	37	Mistletoe		1656-50, 1656-50H and S1656-50H	1628-16PN*	1628-30N*
600 MCM	.891' (22.63 mm)	37	Meadowsweet		1656-60, 1656-60H and S1656-60H		1628-300*
636 MCM	.918' (23.31 mm)	37	Orchid		1656-60, 1656-60H and S1656-60H		1628-300*
650 MCM	.928' (23.57 mm)	37	Heuchera		1656-60, 1656-60H and S1656-60H		1628-300*

*S" is for spring. "H" is for hot latch.

*Special order only. Please allow 30 days for delivery. These are not returnable.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

AAC (All Aluminum Conductor)

For Cable Diameter

700 - 2500 MCM

.963" - 1.823" (24.46 mm - 46.30 mm)

MAXIMUM SAFE LOAD

See facing page
for grip details.

MCM Cable Size	Diameter inches (mm)	No. of Alum. & Steel Strands	Code Word	MAXIMUM SAFE LOAD				
				5,500 lbs (2,268 kg)	8,000 lbs (3,629 kg)	20,000 lbs (9,072 kg)	25,000 lbs (11,340 kg)	25,000 lbs. (11,340 kg) with bolt on jaw
				Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
700 MCM	.963" (24.46 mm)	37	Verbena		1678-20	1628-30P*		1628-50P*
700 MCM	.964" (24.49 mm)	61	Flag		1678-20	1628-30P*		1628-50P*
715.5 MCM	.974" (24.73 mm)	37	Violet		1678-20	1628-30P*		1628-50P*
715.5 MCM	.975" (24.76 mm)	61	Nasturtium		1678-20	1628-30P*		1628-50P*
750 MCM	.997" (25.32 mm)	37	Petunia		1678-20	1628-30P*		1628-50P*
750 MCM	.998" (25.35 mm)	61	Cattail		1678-20	1628-30P*		1628-50P*
795 MCM	1.026" (26.07 mm)	37	Arbutus	1678-30		1628-30R*		1628-50R*
795 MCM	1.028" (26.11 mm)	61	Lilac	1678-30		1628-30R*		1628-50R*
800 MCM	1.029" (26.14 mm)	37	Fuchsia	1678-30		1628-30R*		1628-50R*
800 MCM	1.031" (26.19 mm)	61	Heliotrope	1678-30		1628-30R*		1628-50R*
874.5 MCM	1.076" (27.37 mm)	37	Anemone	1678-30		1628-30R*		1628-50R*
874.5 MCM	1.077" (27.36 mm)	61	Crocus	1678-30		1628-30R*		1628-50R*
900 MCM	1.092" (27.74 mm)	37	Cockscomb	1678-40		1628-30S*		1628-50S*
954 MCM	1.124" (28.55 mm)	37	Magnolia	1678-40		1628-30S*		1628-50S*
954 MCM	1.126" (28.60 mm)	61	Goldenrod	1678-40		1628-30S*		1628-50S*
1000 MCM	1.152" (29.26 mm)	61	Camellia	1678-50		1628-30T*		1628-50T
1000 MCM	1.152" (29.26 mm)	37	Hawkweed	1678-50		1628-30T*		1628-50T*
1033.5 MCM	1.170" (29.71 mm)	37	Bluebell	1678-50		1628-30T*		1628-50T*
1033.5 MCM	1.172" (29.76 mm)	61	Larkspur	1678-50		1628-30T*		1628-50T*
1113 MCM	1.216" (30.88 mm)	61	Marigold			1628-30U*	1628-40U*	1628-50U*
1192.5 MCM	1.258" (31.96 mm)	61	Hawthorn			1628-30U*	1628-40U*	1628-50U*
1272 MCM	1.297" (32.94 mm)	61	Narcissus				1628-40W*	1628-50W*
1351.5 MCM	1.339" (34.02 mm)	61	Columbine				1628-40X*	1628-50X*
1431 MCM	1.379" (35.02 mm)	61	Carnation				1628-40X*	1628-50X*
1510.5 MCM	1.417" (35.98 mm)	61	Gladiolus				1628-40Y*	1628-50Y*
1590 MCM	1.454" (36.93 mm)	61	Coreopsis				1628-40Z*	1628-50Z*
1750 MCM	1.524" (38.72 mm)	61	Jessamine				1628-40A*	1628-50A*
2000 MCM	1.630" (41.41 mm)	91	Cowslip					1628-50B*
2250 MCM	1.729" (43.92 mm)	91	Sagebrush					1628-50D*
2500 MCM	1.823" (46.30 mm)	91	Lupine					1628-50E*

** Maximum safe stringing tension 12,500 lbs to minimize cable deformation.

* Special order. Please allow 30 days for delivery. These are not returnable.



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

- 3M**-www.3m.com
A.B. Chance-
www.hubbellpowersystems.com
AW Sperry-
www.sperryinstruments.com
AEMC-www.aemc.com
Aircraft Dynamics-
www.aircraftdynamics.com
Bashlin-www.bashlin.com
Bethea-
www.betheatoolandequipment.com
Bierer and Associates-
www.bierermeters.com
Bone-www.bonesafety.com
Brunner & Lay-
www.brunnerlay.com
Buckingham Mfg.-
www.buckinghammfg.com
Burndy-www.burndy.com
Capital Safety-
www.capitalsafety.com
Carolina-www.carolinaglove.com
Cembre-www.cembre.com
Cementex-www.cementexusa.com
Condux-www.condux.com
Cooper-www.apextoolgroup.com
Council Tool-www.counciltool.com
Current Tools-
www.currenttools.com
DCD-www.dcdesign.com
Dillon-
www.dillondynamometers.com
Dixie Tool-www.dixie-tool.com
Eagle Line Tools-
www.eaglelinetools.com
Erin-www.erinrope.com
Estex-www.estexmfg.com
GMP-www.gmptools.com
Golight-www.golight.com
Greenlee-www.greenlee.com
H.K. Porter-
www.apexhandtools.com
Hastings-www.hfgp.com
HD Electric-
www.hdelectriccompany.com
Huskie-www.huskiertools.com
Irwin-www.irwin.com
Jameson-www.jamesonllc.com
JBC Safety Plastics-
www.jbcsafety.com
Jenny Tools-www.jennytools.com
Kinco-www.kinco.com
Klein-www.kleintools.com
Knopp-www.knoppinc.com
Leidy Tool Company-
www.leidytool.com
Lewis Mfg.-www.lewisvmfg.com
Lincoln Hoist-
www.lincolrhoist.com
Little Mule-www.cmworks.com/little-
mule-hoists
Lugall-www.lug-all.com
Madi-www.madillc.com
MYTE-www.myte.com
OshKosh-www.oshkoshtools.com
Parker-www.parker.com
Peavey Mfg.-www.peaveymfg.com
Pengo-
www.pengoattachments.com
Pelsue-www.pelsue.com
Plastic Techniques-
www.buckettruckaccessories.com
Princeton Tec.-
www.princetontec.com
Radians-www.radians.com
Rauckman Utility Products-
www.rauckmanutility.com
Ripley-www.ripley-tools.com
Rubbermaid-www.rubbermaid.com
Salisbury-
www.salisburybyhoneywell.com
Safeway Sling-
www.safewaysling.com
S&C-www.sandc.com
Sensor Link-www.sensorlink.com
Servus Rubber-
www.servusproducts.com
Seymour Mfg.-
www.seymourmidwest.com
Sherman & Reilly-www.sherman-
reilly.com
Slingco-www.slingco.com
Speed Systems-
www.spdsystems.com
Stanley-www.stanleyhydraulics.com
Streamlight-www.streamlight.com
Stucchi-www.stucchiusa.com
Tanaka-www.tanaka-usa.com
Tegam-www.tegam.com
Terex Reedrill-www.terex.com
Timco Instruments-
www.timcoinstruments.com
Tulsa Power Products-
www.tulsapower.com
Utility Solutions-
www.utilitysolutionsinc.com
Utility Tool & Body-www.uttwi.com
Wanco-www.wanco.com
Warren Heim-
www.warrenheimcorp.com
Werner-www.wernerco.com
Work Area Protection-
www.workareaprotection.com
Youngstown Gloves-
www.ytgloves.com



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

A**Adapters**

Chance 129, 130
Greenlee 23, 26

AEMC

Resistance Tester 167
Tester Kit 166

American Polywater

Cleaner 89, 90, 192

Animal Guards

Rauckman 193

Aprons

Buckingham 95
Estex 95
Klein 95

Arm Extensions

Hastings 82

Auger Bits

Greenlee 30

B**Bags**

Buckingham 96
Estex 92, 96, 139
Klein 93, 94

Ball Studs

Chance 138

Ball & Socket Systems

Salisbury 137

Barricade Bars

Hastings 168

Bashlin

Body Belt 145, 147
Climbers 149
Gaff Guard 154
Gaff Shaping Kit 155
Lanyard 150
Pole Sling 149
Replacement Gaffs 148

Batteries

Greenlee 28
Makita 28
Streamlight 173, 174

Battery Chargers

Huskie 27
Makita 28

Battery Packs

Huskie 28

Battery Tools 10-28**Bierer Meters**

Phasing Meters 162
Voltage Detectors 161

Blade Covers

Estex 91

Blanket Accessories

Salisbury 192

Blocks

Klein 143

Block & Tackle

Klein 142

Body Belts

Bashlin 145, 147
Buckingham 146, 147, 148

Bolt Circle Adapters

Chance 129

Bolt Cutters

Greenlee 45
Hastings 45
H.K. Porter 46
Klein 45

Bone Safety Signs

Sign Stands 168
Traffic Signs 168, 169

Boosters

Greenlee 36

Breakers

Greenlee 37

Brush Sets

Klein 105

Bucket Covers

Estex 91, 92

Bucket Steps

Hastings 98

Bucket Sticks

Hastings 78

Bucket Storage Bags

Hastings 97
Klein 93, 94
Warren Heim 93

Buckingham Mfg.

Apron 95
Body Belt 146, 147, 148
Boom Strap 153
Buck Limiter 157
Carabiner 154
Climber Strap 153
Gaff Guard 154
Gaff Maintenance Kit 157
Gaff Pole Climber 148
Glove and Sleeve Bag 183
Ground Flag 139
Gut Strap 148
Handline Hook 141
Harness 155, 156
Headline Hook 141
Holster 97
Knives 60



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Buckingham cont.

Lanyards 150, 151, 152, 153
 Ox Blocks 143
 Pads 157
 Positioning Straps 153
 Rescue Systems 158
 Snap 153, 154
 Staple Stick 75
 Tool Bag 93
 Tool Tray 97

Burndy

Crimping Tool 10, 12, 13, 14, 15, 19, 48, 49, 50
 Cutting Tool 19, 21, 22
 Dies 26, 27
 Hydraulic Tool 50
 Impact Wrench 29
 Jaw Assemblies 20
 Pole Cutter 23
 Pump 38
 Ratchet Tool 48
 Remote Heads 31, 32, 33

Bushing Covers

Salisbury 189

Bypass Tool

Madi 86

Cable Cutters

Burndy 31
 Cembre 43
 Cementex 52
 Chance 43
 Greenlee 24, 25, 41
 Huskie 20
 Klein 47, 52

Cable End Strippers

Utility Tool 99, 100, 101

Cable Grips

DCD 111
 Hubbell 113
 Slingco 109, 110, 111

Cable Pullers

Greenlee 116

Cable Slicer

Hastings 47

Cable Stripper

Speed System 100
 Utility Tool 99, 100, 101

Canister Kits

Hastings 98

Cant Hook

Dixie 126
 Hastings 125
 OshKosh 127

Cant Tool

Hastings 125

Carabiner

Buckingham 125

Cembre

Cable Cutter 43
 Crimping Tool 13, 15, 19
 Cutting Head 31
 Cutting Tool 23
 Presshead 33

Cementex

Cable Cutters 52
 Nut Drive Set 56
 Pliers 64, 65
 Ratchet 74
 Screwdrivers 52, 53
 Screwdriver Sets 53
 Socket Sets 70
 Tool Sets 57
 Wrenches 69
 Wrench Sets 68, 69

Chainsaws

Greenlee 35

Chamfer Tools

Speed Systems 103

Chance

Adapters 129, 130
 Assemblies 129, 130
 Cable Cutters 43
 Clampstick 79, 80
 Cleaners 89, 90
 Conductor Support 80
 Covers 83
 Disconnect Tool 79
 Drive-End Wrenches 128
 Elbow Puller Tool 80
 Extension Arm 82
 Extension Arm Accessories 84
 Grounding Clamps 131, 132, 133, 134
 Grounding Clusters 138
 Ground Grid Kit 139
 Ground Rod 138
 Hoists 121, 122
 Pruning Saw 61
 Removal Tool 83
 Rope Blocks 141
 Studs 137, 138
 Stud Cover 138
 Tamping Bar 128
 Testers 165
 Tester Accessories 167
 Torque Limiter 128
 Transformer Gin 80



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Chance cont.

Voltage Detector 160, 166
Voltage Indicator 166

Clamps

Utility Solutions 193

Clamp-on Meters

AEMC 162
Greenlee 163

Clampsticks

Chance 79, 80

Cleaners

American Polywater 192
Chance 89, 90
Hastings 89
Salisbury 191

Cleaning Brushes

Hastings 84

Climbers

Bashlin 149

Clipping Hooks

Tallman 118

Clothing

Tingley 194

Cluster Bags

Estex 139

Cluster Bars

Chance 138

Cluster Supports

Chance 138

Columbus McKinnon

Hoists 121

Combination Splice/T-Body Tools

Speed Systems 103

Compact Pullers

Sherman & Reilly 117

Compression Head

Huskie 35

Compression Tools

Burndy 33
Huskie 34, 51

Conductor Holders

Hastings 84

Conductor Supports

Chance 80
Hastings 82

Conduit Measuring Tape

Greenlee 116

Condux

Rodders 119, 120
Swivels 114, 115

Control Testers

Hastings 85

Control Valves

Greenlee 41

Couplers

Greenlee 39

Covers

Chance 83
Salisbury 188

Credit Application 195**Crimping/Cutting Tools**

Greenlee 16
Klein 66

Crimping Jaws

Greenlee 17
Huskie 10, 18

Crimping Tools

Burndy 10, 11, 12, 13, 14, 15, 19, 49, 50
Cembre 13, 15, 19
Greenlee 11, 13, 14, 15, 17, 31, 32, 33, 34, 49
Huskie 10, 12, 13, 14, 18, 50

Cross Arm Covers

Salisbury 187

Cutting Heads

Cembre 31

Cutting Jaws

Burndy 20

Cutting Kits

Greenlee 26

Cutting Tools

Burndy 19, 21, 22, 23
Cembre 23
Greenlee 20, 24, 25
H.K. Porter 47
Huskie 20, 21

D**DCD**

Cable Grips 111
Swivels 114

Detectors

Hastings 164

Die Kits

Burndy 27
Greenlee 27

Dies

Burndy 26
Huskie 27

Digging Bars

OshKosh 127

Dillon

Dynamometer 117

Disconnect Tools

Chance 79

Discharge Stick

Salisbury 85



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Dixie Tool

- Cant Hook 126
- Duckbill Hook 126
- Tongs 125

Drive Tools

- Dixie 126

Driver End Wrenches

- Chance 128

Dynamometers

- Dillon 117

E**Eagle Line Tools**

- Rope 142

Earth Handling and Pole Setting 125-130**Edge Wedges**

- Speed Systems 103

Elbow-Pullers

- Chance 80

Erin

- Combination Rope 142

Estex

- Apron 95
- Blade Cover 91
- Bucket Cover 91, 92
- Cluster Bag 139
- Glove Bag 184
- Kneeling Pad 169
- Line Hose Bag 184
- Pole Wrap 88
- Sleeve Bag 184
- Tool Bag 92, 96

Extension Arm Accessories

- Chance 84

Extension Arms

- Chance 82
- Hastings 81

F**Fall Protection & Climbing Equipment 145-158****Fall Protection Sizing 159****Ferrules**

- Salisbury 137

Flashlights

- Streamlight 174, 175

Fuse Handling Tools

- S&C 88

Fuse Pullers

- Hastings 85

G**Gaffs**

- Bashlin 148

Gaff Guards

- Bashlin 154
- Buckingham 154

Gaff Kits

- Bashlin 155
- Buckingham 157

Gloves

- Salisbury 171
- Youngstown 170, 171

Glove Accessories

- Salisbury 193

Glove Bags

- Buckingham 183
- Estex 184
- Salisbury 179, 180, 181, 183

Glove Dust

- Salisbury 191

Golight

- Portable Light 172

Greenlee

- Auger Bits 30
- Batteries 28
- Blades & Adapters 23
- Bolt Cutters 45
- Booster Assy. 36
- Breaker Assy. 37
- Cable Cutters 41, 42, 43
- Cable Puller 116
- Chainsaws 35
- Circular Saw Assy. 36
- Clamp-on Meters 163
- Connectors 115
- Control Valves 41
- Couplers 39
- Crimping Tool 11, 13, 14, 15, 17, 31, 34, 49
- Crimper/Cutter 16
- Cutter Kit 26
- Cutting Tool 20, 24, 25
- Dies 26, 27
- Ground Rod Driver 36
- Hammer Drill 40
- Hose Assy. 41
- Impact Wrench 29, 30
- Jaws 17
- Knives 60
- Knockout Kit 25
- Low Pressure Crimper 32, 33
- Measuring Tape 116
- Multimeters 163
- Nut Runners 40
- Pole Puller Assy. 37
- Poly Line 117
- Pump 37, 38, 39
- Tamper Assembly 36

Grips

- Klein 105, 106, 107



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Grips cont.

Little Mule 108

Grips, Cable Prep & Pulling Tools 99-120**Ground Clamps**

Hastings 136

Ground Flag

Buckingham 139

Ground Grid Kits

Chance 139

Grounds & Jumpers 131-140**Ground Mats**

Hastings 139

Ground Rods

Chance 138

Greenlee 36

Grounding Clamps

Chance 131, 132, 133, 134

Salisbury 134, 135

Grounding Jumpers

Salisbury 140

Grounding Order Form 198**Grounding Stud Covers**

Chance 138

Gut Straps

Buckingham 148

H***H.K. Porter***

Bolt Cutter 46

Cable Cutter 43, 44

Cutters 46, 47, 48

Hacksaws

Klein 61

Hacksaw Blades

Klein 61

Hammers

Klein 64

Hammer Drills

Greenlee 40

Hand Tools 52-75**Hand Line Hooks**

Buckingham 141

Hastings 141

Handline Blocks

Hastings 143

Harnesses

Buckingham 155, 156

Hastings

Barricades 168

Bolt Cutters 45

Bucket Step 98

Cable Slicer 47

Canister Kit 98

Cant Hook 125

Cant Tool 125

Capacitor Tester 164

Chain Saw Scabbard 98

Cleaners 89

Cleaning Brush 84

Conductor Holder 84

Control Tester 85

Detectors 164

Extension Arms 81, 82

Fuse Puller 85

Ground Clamp 136

Ground Mat 139

Hand Line Block 143

Handline Hook 141

Holsters 97

Hot Stick 77, 78, 79, 84

Hot Stick Accessories 88

Isolating Link 76, 121

Jumper Holder 136

Line Guard 189

Lamp Changer Head 85

Link Stick 81

Pruner 85

Pruning Saw 85

Phasing Meter 162

Ratchet Cutter 48

Rescue Kit 158

Shotgun Stick 76, 77

Support Arm 82

Storage Bag 97

Tel-O-Pole 77, 78, 79

Tension Tool 76

Tool Tray 98

HD Electric

Tester 165

Voltage Detector 160

Headlamps

Streamlight 173, 174

Headline Hook

Buckingham 141

Hex Key Set

Klein 62

Hoists 121-124**Hoist Isolating Links**

Hastings 121

Hole Diggers

OshKosh 127

Hollow Core Poles

Jameson 62

Holsters

Buckingham 97

Hastings 97



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Hooks

Klein 91, 143, 144

Hoses

Greenlee 41

Hot Stick Accessories

Hastings 88

Hot Stick Cleaners

American Polywater 89

Hastings 89

Hot Sticks

Hastings 77, 78, 79, 84

Hot-Sticks and Hot-Line Tool 76-90**Hubbell**

Grips 112, 113

Huskie

Battery 27, 28

Cable Cutters 20

Compression Head 34, 35

Compression Tool 51

Crimping Tool 50

Dies 27

Pump 38

Robo-Crimp 10, 11, 12, 13, 14, 18, 20

Robo-Cut 21

Steel Punch 40

Hydraulic Tools 29-41**I****Impact Socket**

Klein 70

Impact Wrenches

Burdy 29

Greenlee 29, 30

Stanley 29

Insertion Tools

Utility Tool 105

Installation Tools

Speed Systems 104

Insulated Jumper Cables

Salisbury 140

Insulation Strippers

Speed Systems 99

Insulation Stripper Accessories

Speed Systems 102

Insulator Covers

Salisbury 187

Isolating Link

Hastings 76

J**Jameson**

Hollow Core Pole 62

Knives 61

Pole Saw 61

Rodders 118

Saw Blade 61, 62

Jaw Grips

Klein 105, 106

JBC Safety Plastics

Traffic Cones 168

Jenny Tools

Cable Cutters 47

Ratchet Cutters 44

Jumper Clamps

Hastings 136

Salisbury 136

Jumper Holders

Hastings 136

Jumper Hook

Utility Solutions 87

Jumper Order Form 199**K****Kelly Bar Adapters**

Chance 129, 130

Klein

Adjustable Wrenches 70

Apron 95

Backpack 94

Blocks 143

Block & Tackle 142

Bolt Cutters 45

Cable Cutters 42, 47, 52

Cleaning Brush Set 105

Grips 105, 106, 107

Hacksaw 61

Hacksaw Blades 61

Hammers 64

Hex Set 62

Hooks 91, 143, 144

Impact Socket 70

Knives 58, 89

Measuring Tape 63

Nut Driver Sets 54, 56

Pliers 65, 66, 67, 68

Pole Punch 63

Ruler 63

Screwdrivers 52, 53, 54, 55

Screwdriver Sets 54

Sharpener 58

Tool Bag/Bucket 93, 94

Tool Kit 57

Voltage Detector 163

Wire Tool 144

Wrenches 71

Wrench Sets 68, 69, 70

Kneeling Pads

Estex 169

Knives

Buckingham 60



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Knives cont.

Greenlee 60
Jameson 61
Klein 58, 59
Madi 60

Knockout Kit

Greenlee 25

Knopp

Sequence Indicator 164

L**Lamp Changers**

Hastings 85

Lanterns

Streamlight 172, 173

Lanyards

Bashlin 150
Buckingham 150, 151, 152, 153

Leather Protectors

Salisbury 183

Lever Hoist

Chance 122
Lincoln Hoist 124
Little Mule 122, 123
Lug-All 123

Lewis Mfg.

Debris Tarp 125
Swivels 115

Lighting 172-175**Lincoln Hoist**

Hoists 124

Line Hose

Salisbury 186, 187

Line Hose Bags

Estex 184

Little Mule

Grips 108
Hoists 122, 123

Load Break Tools

S&C 88
Utility Solutions 87

Locking Dog Assembly

Chance 129, 130

Lowell

Wrenches 72

Lugall

Hoists 123

M**Madi**

Knives 60
Socket Drive 74
Universal Attachment 86
Utility Tool 86
Wire Brushes 75

Wrench 74

Makita

Batteries 28

Manual Cutting & Compression Tools 42-51**Mats**

Salisbury 186

Measuring Sticks

Hastings 77, 78
Utility Solutions 87

Meters

SensorLink 164

Meter Pullers

Rauckman 74

Multimeters

Greenlee 163

N**Nut Runners**

Greenlee 40

O**OshKosh**

Cant Hook 127
Digging Bar 127
Peaveys 126
Pike Pole 126
Pole Cradle 126
Post Hole Digger 127
Shovel 127
Tamp Bar 127

Ox Block

Buckingham 143

P**Pads**

Buckingham 157

Paslode

Stapler 74

Peaveys

OshKosh 126

Phasing Meters

Bierer Meters 162
Hastings 162

Pike Poles

OshKosh 126

Pliers

Cementex 64, 65
Klein 65, 66, 67, 68

Pole Climbers

Buckingham 148

Pole Cradle

OshKosh 126

Pole Guard

Salisbury 86, 189

Pole Punch

Klein 63



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Pole Slings

Bashlin 149

Pole Straps

Bashlin 150

Pole Wraps

Estex 88

Poly Line

Greenlee 117

Portable Lighting System

Golight 172

Pressheads

Cembre 33

Pruning Saw

Chance 61

Hastings 85

Jameson 61

Pruners

Hastings 85

Pullers

Greenlee 37

Pulling Grips

Hubbell 112

Pumps

Burndy 38

Greenlee 37, 38, 39

Huskie 38

R***Rauckman***

Meter Puller 74

Wildlife Zap Shield 193

Wrenches 73

Ratchet Cutters

Greenlee 42, 43

H.K. Porter 43, 44, 48

Hastings 48

Jenny Tools 44

Klein 42

Ratchet Lever Hoists

Chance 121

Columbus McKinnon 121

Ratchet Tools

Burndy 48

Cementex 74

Rescue Kits

Hastings 158

Rescue Systems

Buckingham 158

Salisbury 83

Rodders

Condux 119, 120

Jameson 118

Roll Blankets

Salisbury 186

Roller Grips

Speed Systems 103

Roller Link Sticks

Hastings 81

Rope

Eagle Line 142

Erin 142

Rope Blocks

Chance 141

Ropes & Handlines 141-144**Rubber Blanket**

Salisbury 185

Rubber Gloves

Salisbury 178, 179, 180, 181, 182, 183

Rubber Glove Sizing 176**Rubber Goods Testing Form 196****Rubber Insulating PPE & Accessories 178-193****Rubber Overshoes/Boots**

Salisbury 189, 190, 191

Rubber Sleeves

Salisbury 184, 185

Rubber Sleeve Sizing 177***Rubbermaid***

Mounting Bracket 169

Water Cooler 169

Ruler

Klein 63

S***S&C***

Handling Tool 88

Loadbuster 88

Salisbury

Ball & Socket System 137

Blanket Accessories 192

Bushing Cover 189

Cable End Cap 188

Clamps 134, 135, 136

Cleaners 191

Discharge Stick 85

Ferrules 137

Gloves 171

Glove Accessories 193

Glove Bags 179, 180, 181, 183, 184

Glove Dust 191

Guards 86, 189

Grounding Jumpers 140

Jumper Cables 140

Leather Protectors 183

Line Guard 189

Line Hoses 186, 187

Line Hose Bag 184

Rescue Stick 83

Roll Blanket 186



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Salisbury cont.

Rubber Blanket 185
 Rubber Gloves 178, 179, 180, 181, 182
 Rubber Overshoes/Overboots 189, 190, 191
 Rubber Sleeves 184, 185
 Silicone Spray 191
 Sleeve Accessories 192
 Sleeve Bags 183, 184
 Stinger Cover 193
 Switchboard Matting 186
 Tagging Device 188
 Tool Kit 56
 Voltage Detector 160, 161

Saws

Greenlee 36

Saw Blades

Jameson 62

Scabbards

Hastings 98

Scoring Tools

Utility Tool 102

Screwdrivers

Cementex 52
 Klein 52, 53, 54, 55

Screwdriver Sets

Cementex 53, 56
 Klein 54, 56

Scribers

Speed Systems 102

Sensor Link

Ammeters 161, 164

Sequence Indicators

Knopp 164

Sharpening Tools

Klein 58

Sherman & Reilly

Compact Puller 117

Shotgun Sticks

Hastings 76, 77

Shovels

OshKosh 127

Signs

Bone 168, 169
 Hastings 168

Signs & Safety 168-171**Sign Stands**

Bone 168

Sleeve Accessories

Salisbury 192

Sleeve Accessories

Salisbury 192

Sleeve Bags

Buckingham 183

Estex 184

Slingco

Cable Grips 109, 110, 111
 Swivels 115

Snaps

Buckingham 153, 154

Snuffer Removal Tools

Chance 83

Sockets

Speed Systems 75

Socket Drivers

Madi 74

Socket Sets

Cementex 70

Socket Wrenches

Klein 68, 69

Socket Wrench Sets

Klein 68, 69

Speed Systems

Chamfering Tool 103
 Combination Splice/T-Body Tool 103
 Edge Wedge 103
 Installation Tool 104
 Scribers 102
 Strippers 99, 100
 Stripper Accessories 102
 Sockets 75
 Wrench 72, 73, 75

Spotlights

Streamlight 172

Stanley

Impact Wrench 29

Stapler

Paslode 74

Staple Sticks

Buckingham 75

Steel Punch

Huskie 40

Stinger Cover

Salisbury 193

Streamlight

Battery 174
 Flashlight 174, 175
 Headlamps 173, 174
 Lantern 172, 173
 LiteBox Accessories 173
 Pen Light 175
 Spotlight 172
 Worklight 174

Support Arms

Hastings 82

Support Studs

Chance 137



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Swivels

Condux 114, 115
 DCD 114
 Greenlee 115
 Lewis 115
 Slingco 115

T**Tagging Devices**

Salisbury 188

Tamp Bars

Chance 128
 OshKosh 127

Tampers

Greenlee 36

Tape Measure

Klein 63

Tarps

Lewis 125

Tension Tools

Hastings 76

Test Equipment & Meters 160-167**Testers**

AEMC 166, 167
 Chance 165
 HDE 165
 Klein 163

Tester Accessories

Chance 167

Tingley

Clothing 194

Tongs

Dixie 125

Tool & Equipment Storage 91-98**Tool Bags**

Buckingham 96
 Estex 96

Tool Kits

Cementex 57
 Klein 57
 Salisbury 56

Tool Repair Form 197**Tool Trays**

Buckingham 97
 Hastings 98

Torque Limiter

Chance 128

Traffic Cones

JBC 168

Transformer Testers

Chance 80

Tulsa Power Products

Reel Thing 141

U**Universal Attachment**

Madi 86

Utility Solutions

Bypass Tools 86
 Clamps 193
 Jumper Hook 87
 Load Break & Pick-Up Tools 87
 Measuring Hot Sticks 87

Utility Tool

Chamfering Tool 103
 Insertion Tool 105
 Scoring Tool 102
 Strippers 99, 100, 101

Utility Tools

Madi 86

V**Versa Guards**

Salisbury 86, 189

Voltage Detectors

Bierer Meters 161
 Chance 160, 166
 HDE 160
 Salisbury 160, 161

Voltage Indicators

Chance 166

Voltage Meters

SensorLink 161

W**Warren Heim**

Tool Bucket 93

Water Cooler

Rubbermaid 169

Water Cooler Brackets

Rubbermaid 169

Wire Brushes

Madi 75

Wire Stripping/Cutting Tools

H.K. Porter 46
 Klein 66

Wire Tools

Burdy 75
 Klein 144

Work Lights

Streamlight 174

Wrenches

Cementex 69
 Klein 70, 71
 Lowell 72
 Madi 74
 Rauckman 73
 Speed Systems 72, 73, 75



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Wrench Sets

Cementex 68, 69

Klein 70

Y

Youngstown Gloves

Gloves 170, 171



Toll Free: 800-796-9027 Fax: 540-438-9502

www.specialfleettools.com

Storms, Are Unpredictable-We Aren't.

Count on us 24/7/365 for all your storm and emergency needs.
We get your orders received, processed, and out the door.

Contact your Sales Representatives or our Main Office today!



SFS ***SPECIAL
FLEET SERVICE***

U.S. Toll Free: 800-796-9027

Phone: 540-433-7727

Fax: 540-438-9502

store@specialfleettools.com